

Product Data Sheet

Doc. No. : SI	Page	1 of 5			
Part Name	ZTP-148SRC1	Part No.	IRF038M01-00A0	Rev.	0.0

SPECIFICATION of THERMOPILE IR SENSOR

Product Name: ZTP-148SRC1



The information and design authority contained in this document is proprietary to Amphenol Advance Sensors and could be shared with any customers to promote.
The information and design authority contained in this document is proprietary to Customer and shall not be disclosed in whole or in part in any form or for any reason.
You are required to contact with Amphenol Advance Sensors product management for more information or any help
The information and design authority contained in this document is generated by Amphenol Advance Sensors & Customer and shall not be disclosed in whole or in part in any form or for any reason.
You are required to contact with Amphenol Advanced Sensors product management for more information or any help.

Doc. No. : SITS-SS-IRS-021-00 Page 2 of 5

Part Name	ZTP-148SRC1	Part No.	IRF038M01-00A0	Rev.	0.0
-----------	-------------	----------	----------------	------	-----

1. Feature of ZTP-148SRC1

1.1 Thermopile Chip

Dama wastan		LIMITS	LINUT	CONDITION	
Parameter	MIN	ТҮР	MAX	UNIT	CONDITION
CHIP SIZE		1.8 X 1.8		mm²	
DIAPHRAGM SIZE		1.0 X 1.0			
ACTIVE AREA		0.7 X 0.7		mm²	Absorber area
INTERNAL RESISTANCE	60	85	110	kΩ	@25°C
RESISTANCE T.C			0.12	%/℃	
RESPONSIVITY		54		V/W	500K, 1Hz,
RESPONSIVITY T.C		-0.07		%/℃	
NOISE VOLTAGE		37		nV/Hz ^{1/2}	R.M.S, 25°C
NEP		0.69		nW/Hz ^{1/2}	
DETECTIVITY		1.02		cmHz ^{1/2} /W	
TIME CONSTANT		32		ms	

1.2 Thermistor

- NTC Thermistor for Temperature Compensation

Davameter	LIMITS			UNIT	CONDITION	
Parameter	Min	Тур	Max	UNIT	CONDITION	
RESISTANCE		100		kΩ	Tolerance.: ±3% @ 25℃	
Beta – Value		3950		К	Tolerance.: ±1% @ 25℃/50℃	

1.3 Absolute maximum ratings


- Operating Temperature : -20°C ~ 100°C

- Storage Temperature : -40°C ~ 120°C

Doc. No. : SITS	Page	3 of 5	_			
Part Name	ZTP-148SRC1	Part No.	IRF038M01-00A0	Rev.	0.0	1


2. Typical Characteristic data of ZTP-148SRC1

2.1 Sensitivity

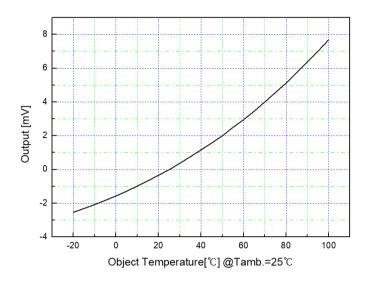

2.2 Field of View


Davameter	LIMITS			Haita	Condition	
Parameter	Min	Тур	Max	Units	Condition	
Field of View		85		Degree	50% of Maximum Output	

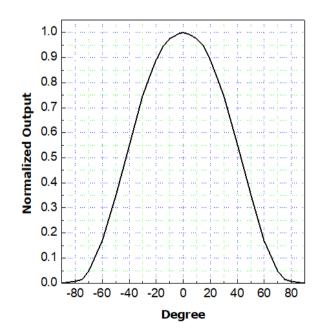

2.3 Thermistor Resistance table

	Minimum	Typical	Maximum
Temperature (℃)	resistance($k\Omega$)	resistance(kΩ)	resistance(kΩ)
-20	925.2	975.8	1028.2
-15	696.2	732.2	769.3
-10	528.9	554.7	581.2
-5	405.5	424.1	443.2
0	313.5	327.0	340.8
5	244.3	254.2	264.3
10	191.9	199.2	206.6
15	151.8	157.2	162.7
20	121.0	125.0	129.0
25	97.0	100.0	103.0
30	77.9	80.5	83.1
35	63.0	65.2	67.5
40	51.2	53.2	55.1
45	41.9	43.6	45.2
50	34.5	35.9	37.3
55	28.5	29.7	31.0
60	23.6	24.7	25.8
65	19.7	20.7	21.6
70	16.5	17.3	18.2
75	13.9	14.6	15.4
80	11.8	12.4	13.0
85	10.0	10.5	11.1
90	8.5	9.0	9.5
95	7.3	7.7	8.1
100	6.2	6.6	7.0

2.4 Transmission data of Filter

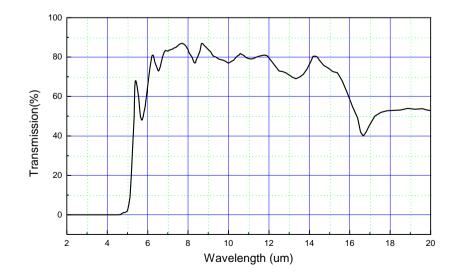

 Doc. No. : SITS-SS-IRS-021-00
 Page
 5 of 5

 Part Name
 ZTP-148SRC1
 Part No.
 IRF038M01-00A0
 Rev.
 0.0

3. Outline of Sensor package and pin arrangement [Unit:mm]

