

Middle East Technical University

Department of Electrical and Electronics Engineering

EE568 – Selected Topics in Electrical Machines

Project 1: Torque in a Variable Reluctance Machine

Author: Elif Topaloğlu

Date: April 19, 2026

GitHub Repository:

<https://github.com/odtu/EE568/tree/master/Project1>

Contents

1	Introduction	2
2	Q1 - Analytical Modelling	2
2.1	Assumptions	2
2.2	Part (a) - Reluctance and Inductance Analysis	3
2.2.1	Inductance as a Function of Rotor Position	4
2.2.2	Numerical Results Summary	5
2.3	Part (b) -Torque under Constant DC Excitation	5
2.3.1	Torque Derivation	5
2.3.2	Torque as a Function of Rotor Position	6
2.3.3	Results Summary	7
2.4	Part (c) - Non-Linear Effects and Model Improvements	7
2.4.1	Fringing Flux	7
2.4.2	Non-Uniform Flux Distribution	8
2.4.3	Saturation and Non-Linear Permeability	8
3	Q2 - 2D FEA Modelling (Linear Materials)	8
3.1	Part (a) - Flux Density Vectors at Different Rotor Positions	9
3.2	Part (b) - Inductance and Stored Energy	11
3.3	Part (c) - Torque Variation with respect to Rotor Angle and Comparison with Analytical Model	12
4	Q3 - 2D FEA Modelling (Non-Linear Materials)	13
4.1	Part (a) - Flux Density Vectors at Different Rotor Positions	13
4.2	Part (b) - Inductance and Stored Energy	15
4.3	Part (c) - Torque Variation with respect to Rotor Angle and Comparison with Analytical Model	15
4.4	Part (d) - Comparison: Linear vs. Non-Linear, Fringing and Saturation Effects	16
5	Q4 - Control Method for Continuous Rotation	16
6	Q5 - Motion Animation	17
7	Q6 - 3D FEA Analysis	17
8	Conclusion	20
A	Material Properties	21
B	MATLAB Source Code	21

1 Introduction

This report presents the analytical modeling and simulation analysis of a variable reluctance machine (VRM) as part of EE568 Project 1. Variable reluctance machines generate torque by minimizing the reluctance of the magnetic circuit; unlike permanent magnet or wound-rotor machines, they require no rotor excitation, making them robust and low-cost.

The main objectives of this project are:

1. Derive analytical expressions for the reluctance, inductance, and torque as a function of rotor position.
2. Model the system in a 2D finite element analysis (FEA) software using linear material properties and compare with the analytical results.
3. Extend the FEA model to non-linear material properties and investigate the effects of saturation and fringing flux.
4. Propose a control strategy to achieve continuous rotor rotation.

The machine geometry for this project is defined on the course GitHub page. Some of the key parameters are summarized in Table 1.

Table 1: Machine Parameters

Parameter	Symbol	Value
Number of turns	N	300
Coil current (DC)	I	2.5 A
Core depth	d	25 mm
Core width	w_c	15 mm
Air-gap clearance	g	0.5 mm
Coil winding area	A_{coil}	30 mm $\times$ 10 mm

2 Q1 - Analytical Modelling

2.1 Assumptions

The following simplifying assumptions are adopted throughout the analytical model:

1. The core material is infinitely permeable ($\mu_r \rightarrow \infty$), so the core reluctance is negligible.
2. Inductance varies sinusoidally with rotor position.
3. Fringing flux at the air-gap is neglected.
4. The magnetic system is linear (no saturation).
5. Magnetic flux is uniformly distributed across the core cross-section.

2.2 Part (a) - Reluctance and Inductance Analysis

By using the assumptions given, reluctance of the system can be calculated by the below formula:

$$\mathcal{R} = \frac{l}{\mu A_{core}} \quad (1)$$

where l is the path length, μ is the permeability and A_{core} is the core cross-sectional area. As the assumption states, the core is assumed to be infinitely permeable, which makes the core reluctance zero. Thus, total reluctance will only consider the air-gap reluctance. As the air-gap changes with respect to position, there will be a minimum and a maximum reluctance value. In the following, all the parameters to find the reluctance and the maximum and minimum reluctance values are calculated.

The core cross-sectional area is:

$$A_c = w_c \cdot d = 15 \times 10^{-3} \times 25 \times 10^{-3} = 375 \times 10^{-6} \text{ m}^2 \quad (2)$$

When the rotor tooth is fully aligned with the stator pole, which is the maximum inductance position, the total air-gap path length consists of two air-gaps:

$$l_{g,\min} = 2g = 2 \times 0.5 = 1 \text{ mm} \quad (3)$$

When the rotor is in the fully unaligned position, the flux path must also traverse the additional 2 mm each side:

$$l_{g,\max} = 2g + 2 \times 2 \text{ mm} = 1 + 4 = 5 \text{ mm} \quad (4)$$

Substituting into Equation (1):

$$\mathcal{R}_{\min} = \frac{1 \times 10^{-3}}{4\pi \times 10^{-7} \times 375 \times 10^{-6}} = 2.12 \times 10^6 \text{ H}^{-1} \quad (5)$$

$$\mathcal{R}_{\max} = \frac{5 \times 10^{-3}}{4\pi \times 10^{-7} \times 375 \times 10^{-6}} = 1.06 \times 10^7 \text{ H}^{-1} \quad (6)$$

The self-inductance of the coil is related to the reluctance by:

$$L = \frac{N^2}{\mathcal{R}} \quad (7)$$

Therefore, by using Equation (7):

$$L_{\max} = \frac{300^2}{\mathcal{R}_{\min}} = \frac{90,000}{2.122 \times 10^6} \approx 42.41 \text{ mH} \quad (8)$$

$$L_{\min} = \frac{300^2}{\mathcal{R}_{\max}} = \frac{90,000}{1.061 \times 10^7} \approx 8.48 \text{ mH} \quad (9)$$

2.2.1 Inductance as a Function of Rotor Position

The question further asks for the variation of the inductance with respect to the position under the assumption of sinusoidal variation. Since the machine has two poles due to variable reluctance, one mechanical revolution will produce two electrical cycles. Assuming a sinusoidal variation of inductance with the electrical angle θ :

$$L(\theta) = L_{\text{avg}} + L_{\Delta} \cos(2\theta) \quad (10)$$

where:

$$L_{\text{avg}} = \frac{L_{\max} + L_{\min}}{2} = \frac{42.41 + 8.48}{2} \approx 25.45 \text{ mH} \quad (11)$$

$$L_{\Delta} = \frac{L_{\max} - L_{\min}}{2} = \frac{42.41 - 8.48}{2} \approx 16.96 \text{ mH} \quad (12)$$

The resulting inductance profile is plotted in Figure 1.

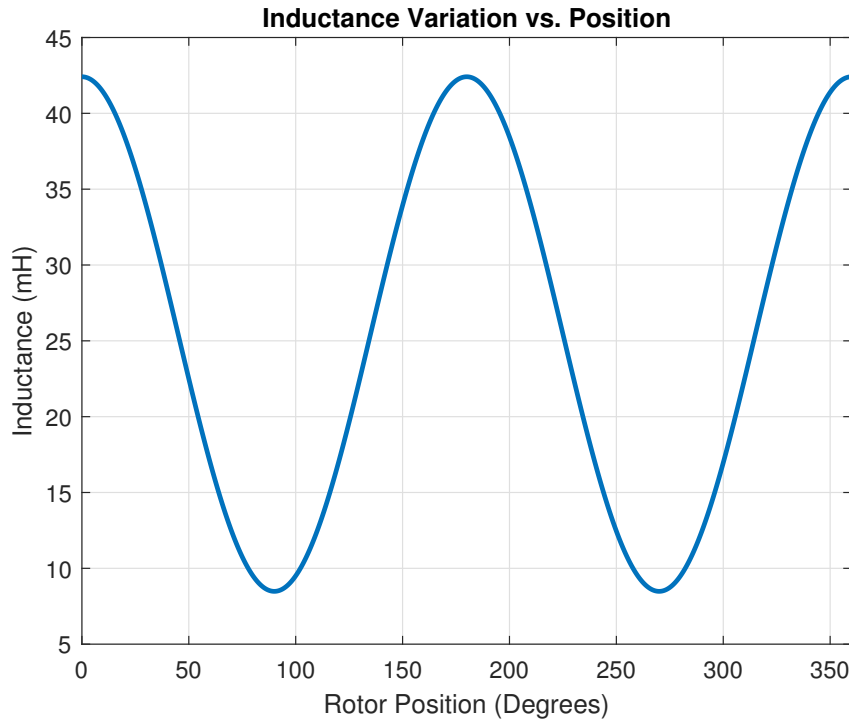


Figure 1: Inductance variation as a function of rotor position.

The inductance reaches its peak of 42.41 mH at the aligned positions (0° and 180°) and its minimum of 8.48 mH at the unaligned positions (90° and 270°).

2.2.2 Numerical Results Summary

Finally, numerical results for this part is summarized below.

Table 2: Analytical Reluctance and Inductance Results

Quantity	Symbol	Value
Minimum reluctance	$\mathcal{R}_{\min}$	$2.122 \times 10^6 \text{ H}^{-1}$
Maximum reluctance	$\mathcal{R}_{\max}$	$1.061 \times 10^7 \text{ H}^{-1}$
Maximum inductance	$L_{\max}$	42.41 mH
Minimum inductance	$L_{\min}$	8.48 mH

2.3 Part (b) -Torque under Constant DC Excitation

2.3.1 Torque Derivation

To derive the torque expression, one should make use of the stored magnetic energy on an inductor. The stored magnetic energy can be expressed in terms of flux linkage as:

$$W = \int_0^\lambda i(\lambda) d\lambda \quad (13)$$

For a linear magnetic system, the relationship between flux linkage and current is:

$$\lambda = L(\theta) i \quad (14)$$

Thus, the current can be written as:

$$i = \frac{\lambda}{L(\theta)} \quad (15)$$

Substituting into the energy expression:

$$W = \int_0^\lambda \frac{\lambda}{L(\theta)} d\lambda \quad (16)$$

Since $L(\theta)$ is independent of λ (linear system), it can be treated as constant:

$$W = \frac{1}{L(\theta)} \int_0^\lambda \lambda d\lambda \quad (17)$$

$$W = \frac{1}{L(\theta)} \cdot \frac{1}{2} \lambda^2 \quad (18)$$

Substituting $\lambda = L(\theta)i$:

$$W = \frac{1}{2}L(\theta)i^2 \quad (19)$$

The electromagnetic torque is obtained from:

$$T = \frac{dW}{d\theta} \quad (20)$$

$$T = \frac{d}{d\theta} \left(\frac{1}{2}L(\theta)i^2 \right) \quad (21)$$

For constant current excitation:

$$T(\theta) = \frac{1}{2}i^2 \frac{dL(\theta)}{d\theta} \quad (22)$$

Inductance variation is defined in the previous question. By taking the derivative, one can obtain the inductance variation as follows:

$$L(\theta) = L_{\text{avg}} + L_{\text{amp}} \cos(2\theta) \quad (23)$$

$$\frac{dL}{d\theta} = -2L_{\text{amp}} \sin(2\theta) \quad (24)$$

By inserting the inductance variation into Equation (22), the final torque equation becomes:

$$T(\theta) = -i^2 L_{\text{amp}} \sin(2\theta) \quad (25)$$

2.3.2 Torque as a Function of Rotor Position

The torque profile is plotted in Figure 2 by using the derived equation.

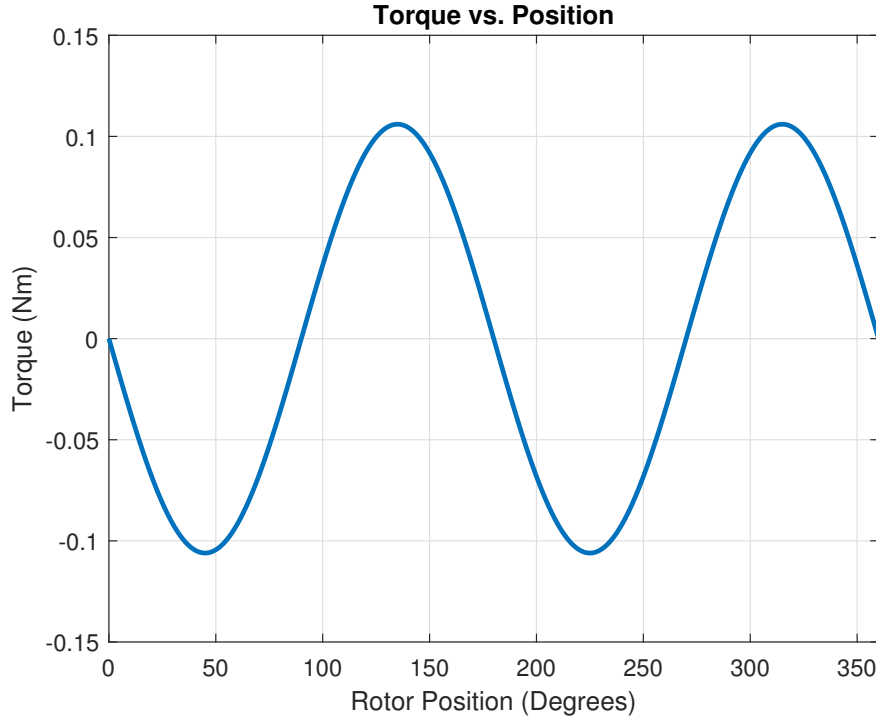


Figure 2: Electromagnetic torque as a function of rotor position under constant DC excitation ($I = 2.5$ A).

2.3.3 Results Summary

Table 3: Torque Results (Constant DC Excitation)

Quantity	Symbol	Value
Maximum torque	$T_{\max}$	0.11 Nm
Minimum torque	$T_{\min}$	-0.11 Nm

The torque is sinusoidal at twice the rotor frequency. It is positive in the regions where inductance is increasing (rotor moving towards alignment) and negative where inductance is decreasing. Under constant DC excitation, the average torque over a full revolution is zero, since the positive and negative half-cycles cancel.

2.4 Part (c) - Non-Linear Effects and Model Improvements

2.4.1 Fringing Flux

In the simple analytical model, flux is assumed to flow only through the face of the stator pole directly across the air-gap, ignoring the flux that flows outward around the pole edges. In practice, this fringing flux can significantly increase the effective cross-sectional area, particularly when the air-gap is large. One common approach to consider the fringing effects is to add the gap length to each linear dimension of the pole face to obtain an effective area:

$$A_{\text{eff}} = (w_c + g)(d + g) \quad (26)$$

This correction, as detailed in [1], is applied separately for each rotor position and reduces the reluctance, raising the predicted inductance closer to FEA results.

2.4.2 Non-Uniform Flux Distribution

The assumption of uniform flux distribution across the core is valid when the core is far from saturation conditions or the dimensions are such that the flux path is relatively uniform. A more accurate treatment to include would divide the core and air-gap regions into parallel flux tubes and solve for the flux in each tube independently, accounting for the variation of permeability in a saturating core. This would require numerical integration across the core cross-section and is more complex, but it would yield a more accurate prediction of inductance and torque, especially near saturation.

2.4.3 Saturation and Non-Linear Permeability

When the flux density in the core approaches the saturation flux density ($B_{\text{sat}} \approx 1.5 \text{ T}$ for typical electrical steel), the incremental permeability drops sharply. In this regime, the inductance is no longer constant for a given position. It becomes a function of both θ and I . For this condition, the co-energy must be computed numerically from the magnetisation curve:

$$W'(I, \theta) = \int_0^I \lambda(i, \theta) di \quad (27)$$

and the torque obtained as $T = \partial W' / \partial \theta \big|_{I=\text{const}}$.

To calculate this effect, the B-H curve of the selected lamination material to be included in the analysis.

3 Q2 - 2D FEA Modelling (Linear Materials)

In this section, the variable reluctance machine will be modelled in a 2D finite element analysis (FEA) software using linear material properties. The results will be compared with the analytical model derived in Q1 to validate the assumptions and identify any discrepancies. Main outputs from the FEA simulations will include flux density vectors, inductance values at different rotor positions, stored magnetic energy, and torque profiles. Machine is generated in ANSYS Maxwell software by using the geometry provided on the course GitHub page. As the core material, M-19 electrical steel is selected due to its typical use in such applications and low eddy current losses. Material properties of the PC40 ferrite core is available on ANSYS and the properties are presented in the appendix. In the linear part of the B-H curve, material has the relative permeability of $\mu_r \approx 2000$ which is used in the linear FEA simulations. Results for the analysis will be presented in the following subsections. Simulation model is presented in Figure 3.

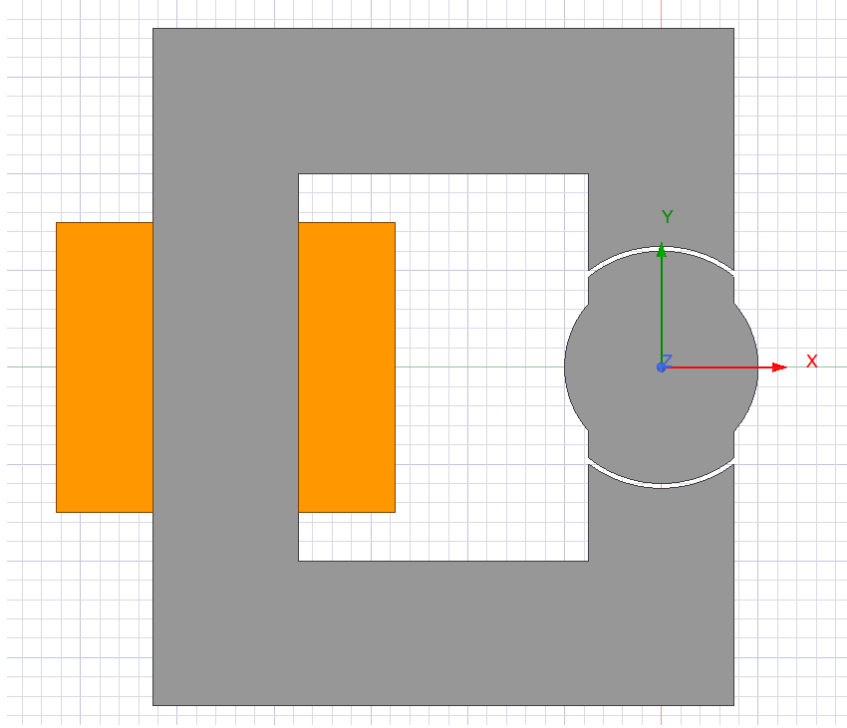




Figure 3: 2D FEA model of the variable reluctance machine in ANSYS Maxwell.

3.1 Part (a) - Flux Density Vectors at Different Rotor Positions

In this part, flux density vectors are plotted for three different rotor positions: aligned (0°), intermediate (45°), and unaligned (90°). The flux density distribution will illustrate how the magnetic field lines concentrate in the aligned position and spread out in the unaligned position, confirming the assumptions made in the analytical model. The flux density plots will be presented in Figures 4, 5, and 6.

As can be seen from the flux density plots, the flux lines are highly concentrated at the starting position (0°) where the rotor tooth is fully aligned with the stator pole, resulting in a high flux density. At the intermediate position (45°), the flux lines begin to spread out, indicating a decrease in flux density.

Finally, at the unaligned position (90°), the flux lines are widely spread, confirming the significant reduction in flux density and validating the assumptions of the analytical model. As the air gap increases with the rotor position, the reluctance increases which decreases the flux density while increasing the fringing fluxes across the air gap. These fringing fields can be observed in the flux density plots.

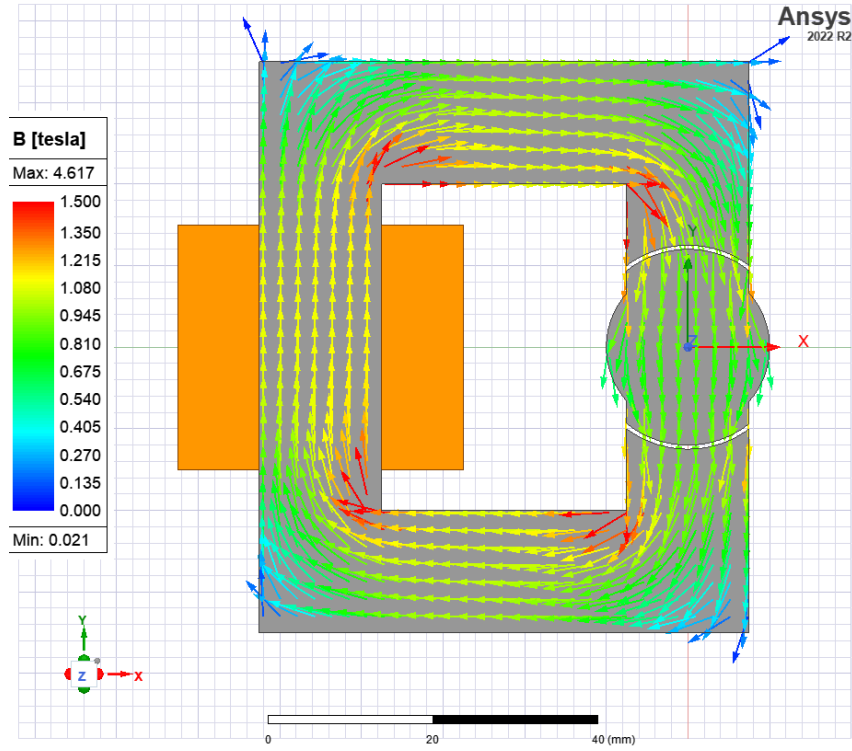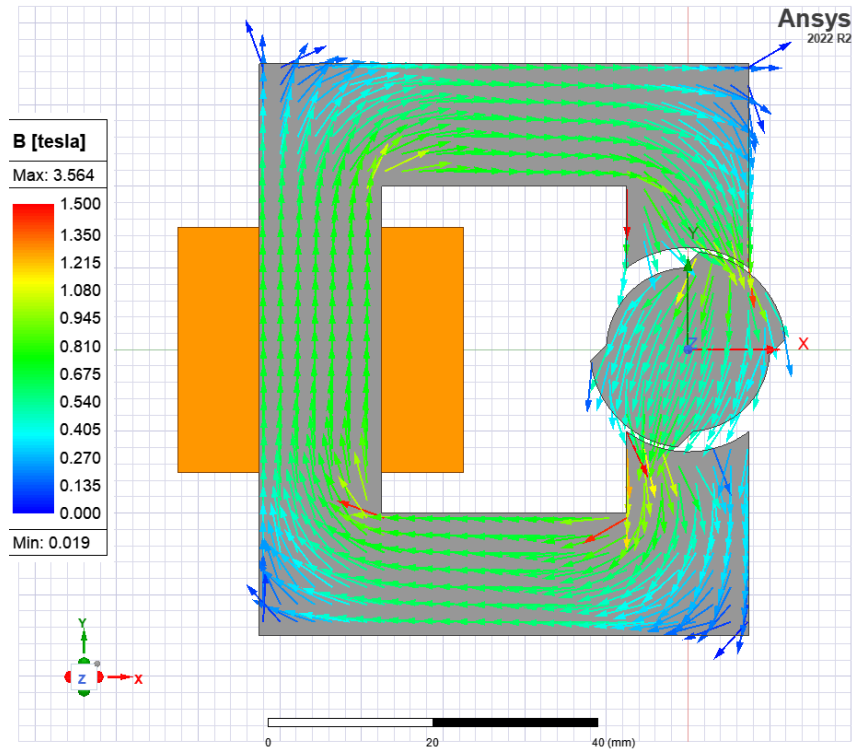Figure 4: Flux density at 0° for linear materialFigure 5: Flux density at 45° for linear material

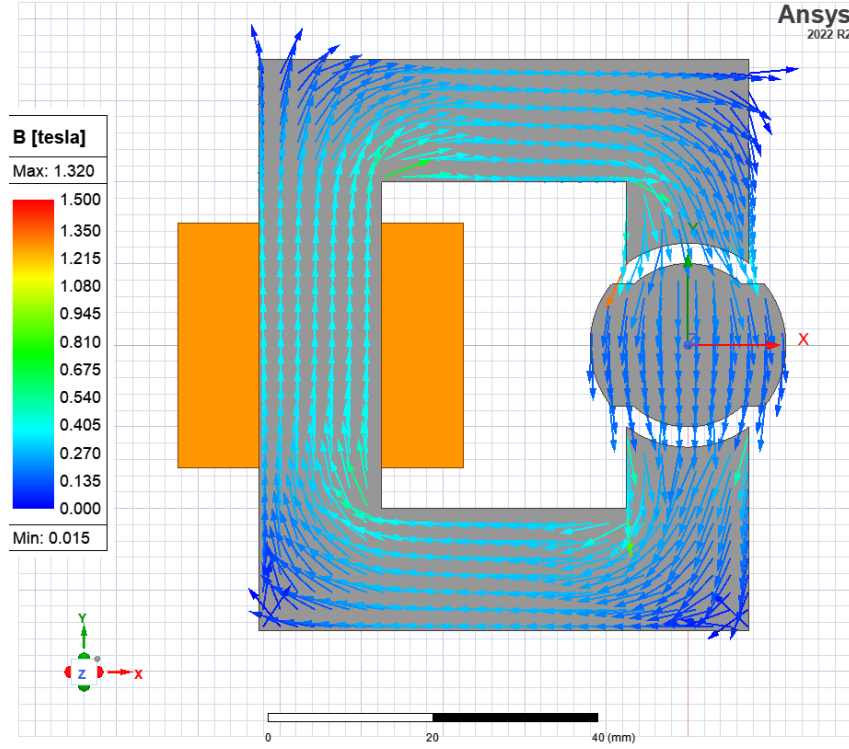


Figure 6: Flux density at 90° for linear material

3.2 Part (b) - Inductance and Stored Energy

For the same three rotor positions, the inductance values and stored magnetic energy will be calculated from the FEA results. The inductance can be obtained from ANSYS itself by assigning the appropriate inductance parameters as the matrix, while the stored energy can be calculated using the co-energy method using Equation (19). These values will be compared with the analytical predictions to assess the accuracy of the analytical calculations and identify any discrepancies due to the assumptions made. Inductance results will be tabulated in Table 4 and the stored energy values will be presented in Table 5.

When the results are compared with the analytical model, it is expected that the FEA results will show higher inductance values at the aligned position due to the fringing flux which increases the effective area. In FEA, inductance is calculated as 49.4 mH at 0° which is higher than the analytical value of 42.41 mH. At the intermediate position (45°), the inductance is calculated as 32.2 mH in FEA which is also higher than the analytical value of 25.45 mH. Finally, at the unaligned position (90°), the inductance from FEA is 16.5 mH which is again higher than the analytical value of 8.48 mH. This discrepancy can be attributed to the fringing flux effects which are not accounted for in the analytical model, confirming that fringing flux significantly increases the effective area and thus the inductance, especially at larger air gaps which is the reason for the larger discrepancy at the unaligned position.

Additionally, as the analytical model assumes a uniform flux distribution, it underestimates the inductance at positions where the flux is more concentrated, while FEA captures the non-uniform distribution and thus predicts higher inductance values. Flux

density plots from the previous section also support this conclusion.

Table 4: Inductance Values from FEA for Linear Material

Rotor Position	Inductance (mH)
0°	49.4
45°	32.2
90°	16.5

Table 5: Stored Energy Values from FEA for Linear Material

Rotor Position	Stored Energy (J)
0°	0.154
45°	0.101
90°	0.052

3.3 Part (c) - Torque Variation with respect to Rotor Angle and Comparison with Analytical Model

In FEA, rotor is rotated in small increments of the angle (e.g., every 1°) and the torque is obtained at each position. The resulting torque profile is plotted as a function of rotor angle and presented in Figure 7. The torque profile was assumed to have a sinusoidal variation in the analytical model. However, the FEA results may show deviations from this idealized shape as the rotor has different geometries at different angles that can cause non-sinusoidal variations in the inductance and thus the torque. Thus, FEA results show that the sinusoidal waveform assumption is not entirely accurate, especially near the aligned and unaligned positions where the flux distribution changes more abruptly.

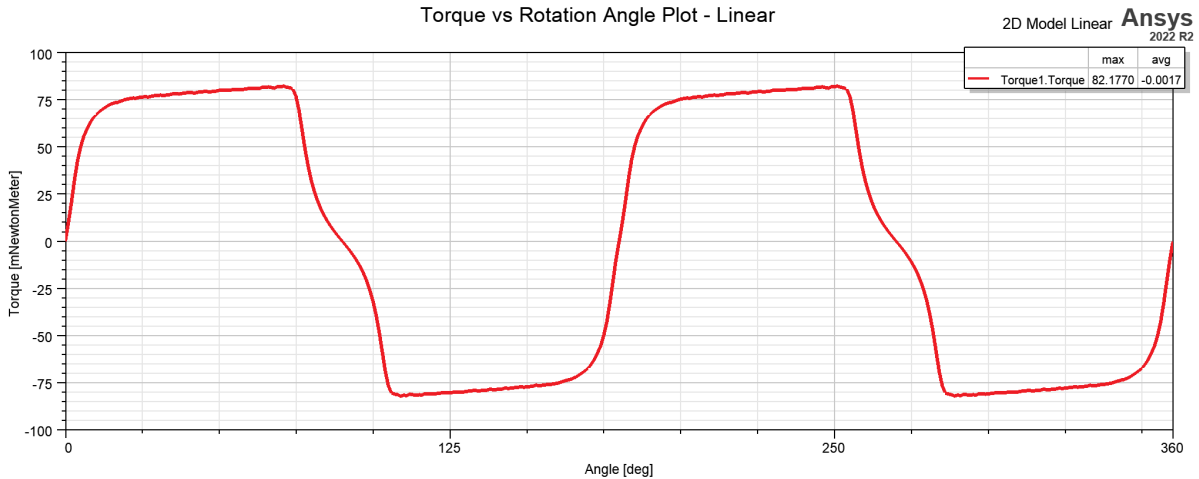


Figure 7: Torque variation with respect to rotor angle from FEA simulations for linear material.

Also, torque waveform is not symmetric as the analytical model assumes. This is because the analytical model assumes a uniform flux distribution and neglects fringing effects, which makes the change of inductance with respect to rotor angle symmetric. However, in FEA, the flux distribution is non-uniform and fringing effects are included, which leads to an asymmetric torque profile.

Additionally, peak torque from the FEA is approximately 82.2 mNm which is lower than the analytical value of 110 mNm. The reason is again the fringing flux which increases the inductance for the unaligned position more than the aligned position, thus reducing the maximum torque values.

4 Q3 - 2D FEA Modelling (Non-Linear Materials)

In this section, the FEA model will be extended to include non-linear material properties, specifically the B-H curve of the PC40 ferrite core. The effects of saturation and fringing flux will be investigated by comparing the results with the linear FEA model and the analytical predictions. The main outputs will include flux density vectors, inductance values, stored energy, and torque profiles at different rotor positions. The results will be analyzed to understand how non-linearities affect the machine performance and to identify any limitations of the linear assumptions made in the analytical model.

4.1 Part (a) - Flux Density Vectors at Different Rotor Positions

As before, flux density vectors are plotted for three different rotor positions: aligned (0°), intermediate (45°), and unaligned (90°) for the non-linear material. The flux density plots will be presented in Figures 8, 9, and 10.

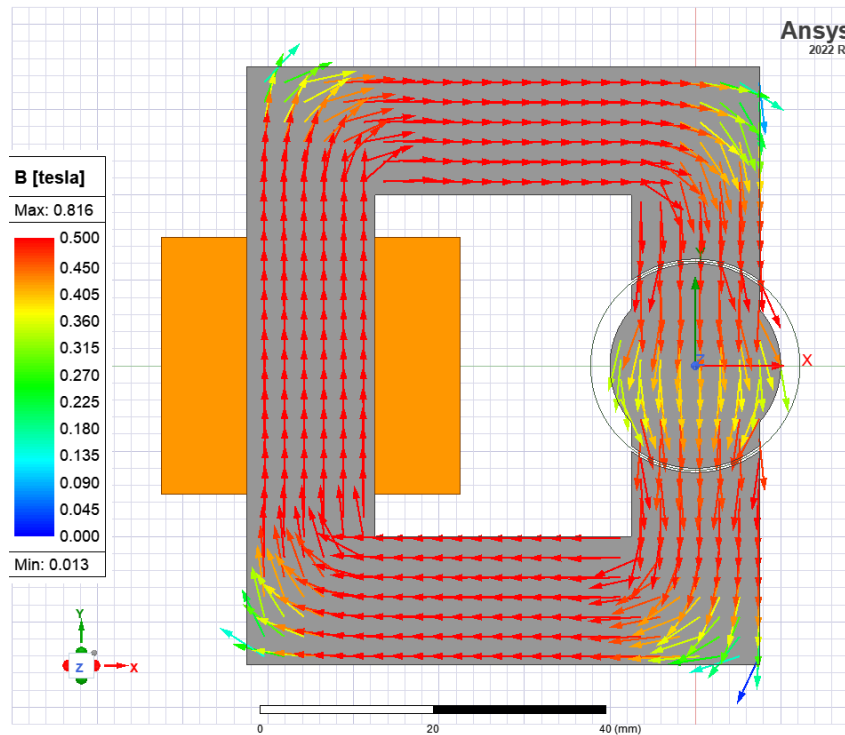


Figure 8: Flux density at 0° for non-linear material

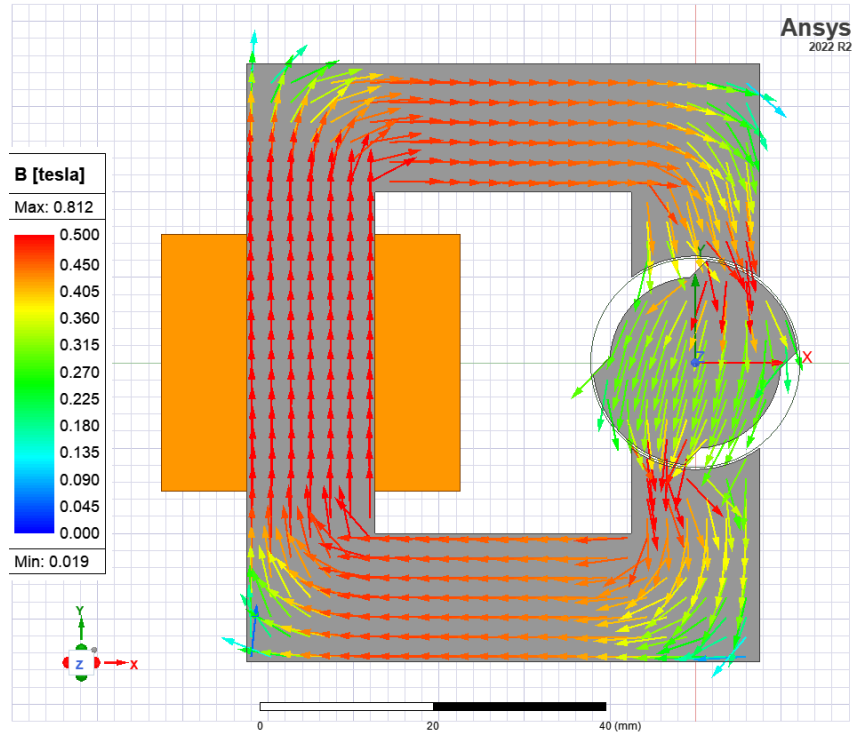


Figure 9: Flux density at 45° for non-linear material

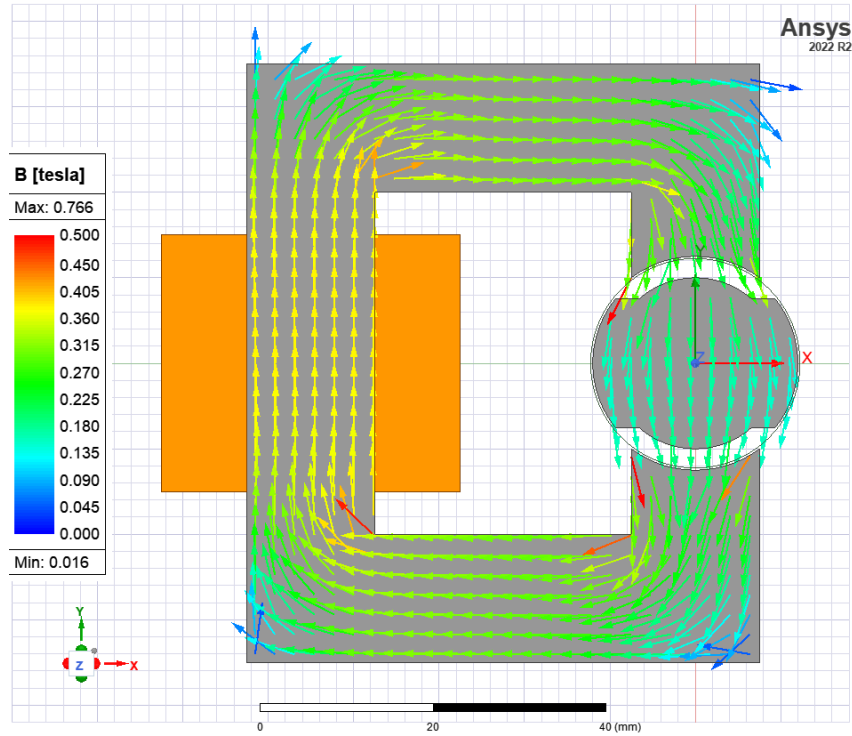


Figure 10: Flux density at 90° for non-linear material

In the material data of the core, knee point of the saturation is around 0.5 T. As can be seen from the flux density plots, most of the points in the core exceeds the saturation

point at the aligned position (0°) where the flux density is the highest. At the intermediate position (45°), some regions of the core are still saturated while others are not, indicating a non-uniform saturation condition. Finally, at the unaligned position (90°), the flux density is significantly lower and most of the core is not saturated, confirming that saturation effects are more pronounced at positions with higher flux density.

4.2 Part (b) - Inductance and Stored Energy

For the inductance and the stored energy, the results are significantly different from the linear case since the core is saturated. The inductance values at different rotor positions are tabulated in Table 6 and the stored energy values are presented in Table 7.

Table 6: Inductance Values from FEA for Non-Linear Material

Rotor Position	Inductance (mH)
0°	24.7
45°	23.1
90°	16.6

Table 7: Stored Energy Values from FEA for Non-Linear Material

Rotor Position	Stored Energy (J)
0°	0.077
45°	0.072
90°	0.052

As the core saturates, the permeability of the core decreases significantly compared to the linear region, reluctance increases and thus the inductance decreases. This is why the inductance values are significantly lower than the linear case, especially at the aligned position where saturation is most severe. The stored energy also decreases due to the reduced inductance and the fact that the core cannot store as much magnetic energy when it is saturated. The results confirm that saturation has a significant impact on the machine performance, reducing both the inductance and the stored energy, which would in turn affect the torque production.

4.3 Part (c) - Torque Variation with respect to Rotor Angle and Comparison with Analytical Model

Finally, the torque variation with respect to rotor angle is plotted for the non-linear material and compared with the analytical model. The torque profile is presented in Figure 11. The torque profile is different from the linear case since the core is saturated. as the inductance is significantly reduced at the aligned position due to saturation, the torque is also significantly reduced to maximum value of 62.4 mNm compared to the linear case. The torque waveform is also more distorted and less sinusoidal than in the linear case, especially near the aligned position where saturation effects are most pronounced. This confirms that the assumptions of linearity and uniform flux distribution in the analytical model are not valid in the presence of saturation, and that non-linear effects must be considered for accurate predictions of machine performance under high excitation conditions.

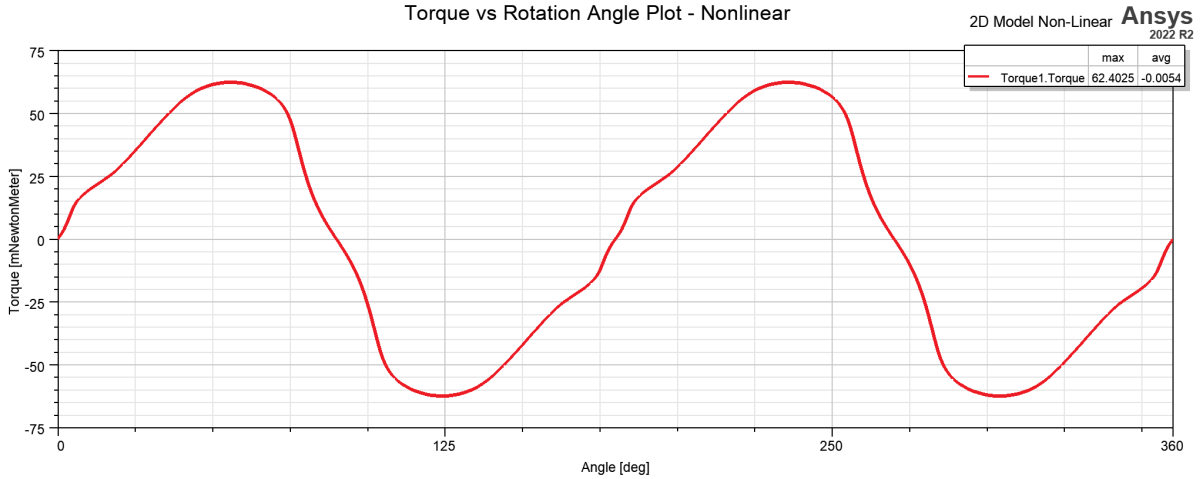


Figure 11: Torque variation with respect to rotor angle from FEA simulations for Non-Linear Material.

4.4 Part (d) - Comparison: Linear vs. Non-Linear, Fringing and Saturation Effects

When the linear and non-linear FEA results are compared, it is evident that the non-linear effects, particularly saturation, have a significant impact on the machine performance. The inductance and stored energy are both significantly reduced in the non-linear case due to saturation, especially at the aligned position where the flux density is highest. The torque is also significantly reduced and the waveform is more distorted in the non-linear case compared to the linear case. The fringing flux effects, which are included in both linear and non-linear FEA models, also contribute to the discrepancies between the analytical model and the FEA results, particularly at larger air gaps where the fringing flux is more significant. Overall, the results highlight the importance of considering non-linear material properties and fringing flux effects for accurate predictions of machine performance, especially under high excitation conditions where saturation is likely to occur.

5 Q4 - Control Method for Continuous Rotation

When the torque and inductance profiles are analyzed, it is clear that the machine produces positive torque when the rotor is moving towards the aligned position where the inductance is increasing, and negative torque when the rotor is moving away from the aligned position where the inductance is decreasing. To achieve continuous rotation, a control strategy must be implemented to ensure that the current excitation is applied in such a way that it always produces positive torque in the direction of desired rotation. When the torque formula derived in the first question is analyzed, it can be seen that the torque is proportional to the square of the current and the sine of twice the rotor angle. This means that the torque will be independent of the current direction, but the sign of the torque will depend on the sign of the sine term.

$$T(\theta) = -i^2 L_{\text{amp}} \sin(2\theta) \quad (28)$$

One of the easiest approaches to achieve positive average torque is to excite a current when the inductance is increasing (which is the section where the sine function is negative), and excite no current when the inductance is decreasing. By this approach, negative portions of the torque waveform will be eliminated and the machine will produce positive average torque. This control method is implemented in ANSYS Maxwell by using a transient simulation with a time-varying conditional current excitation. The current is applied only when the rotor angle is in the range where the inductance is increasing, and it is set to zero otherwise. The resulting torque profile from this control strategy is presented in Figure 12. As can be seen from the figure, average torque is positive and approximately equal to 0.05 Nm, which confirms that the control strategy is effective in producing continuous rotation in the desired direction. The torque waveform is no longer sinusoidal, but it has a positive average value.

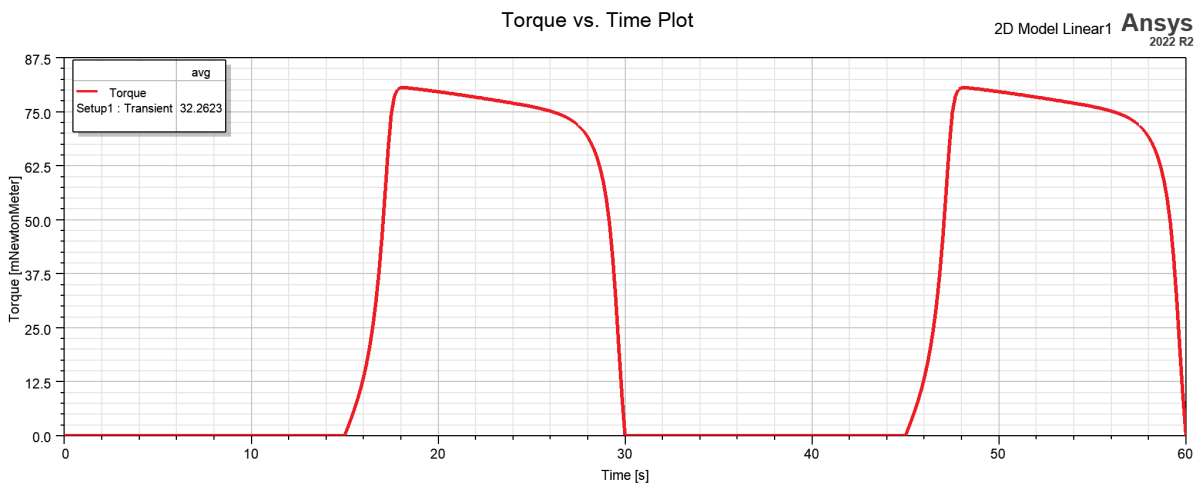


Figure 12: Torque variation with respect to time from FEA simulations with control strategy implemented.

6 Q5 - Motion Animation

Motion animation of the rotor is created in ANSYS Maxwell by using the simulation results from the previous question. The animation is available on the project GitHub page at <https://github.com/odtu/EE568/tree/master/Project1>. Unfortunately it is problematic to add the animation directly in LaTeX. A figure from the animation is included below as a static representation of the motion.

7 Q6 - 3D FEA Analysis

For the 3D analysis, the machine is modelled in 3D FEA software and the same analyses are performed as in the 2D case. The results are compared with the 2D FEA results to understand the effects of three-dimensionality on the machine performance. The main outputs include flux density vectors, inductance values, stored energy, and torque profiles at different rotor positions. 3D model is constructed in ANSYS Maxwell by extruding the 2D geometry and assigning the same material properties. The results for the flux density vectors are presented below.

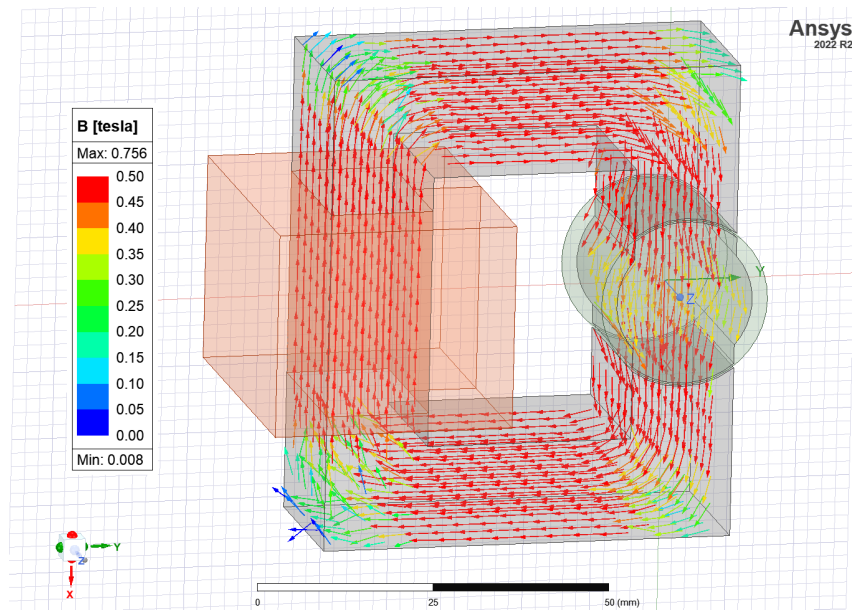


Figure 13: Flux density at 0° for non-linear material in 3D FEA

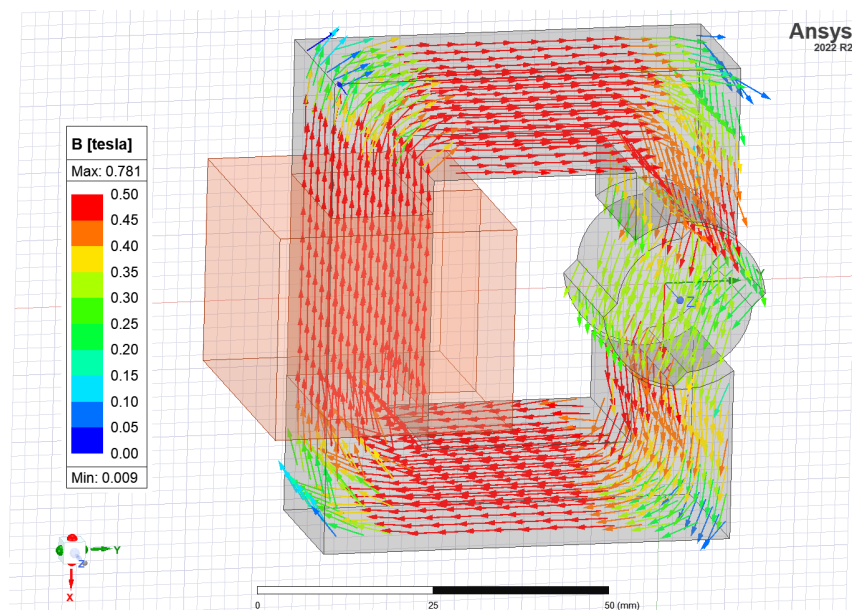


Figure 14: Flux density at 45° for non-linear material in 3D FEA

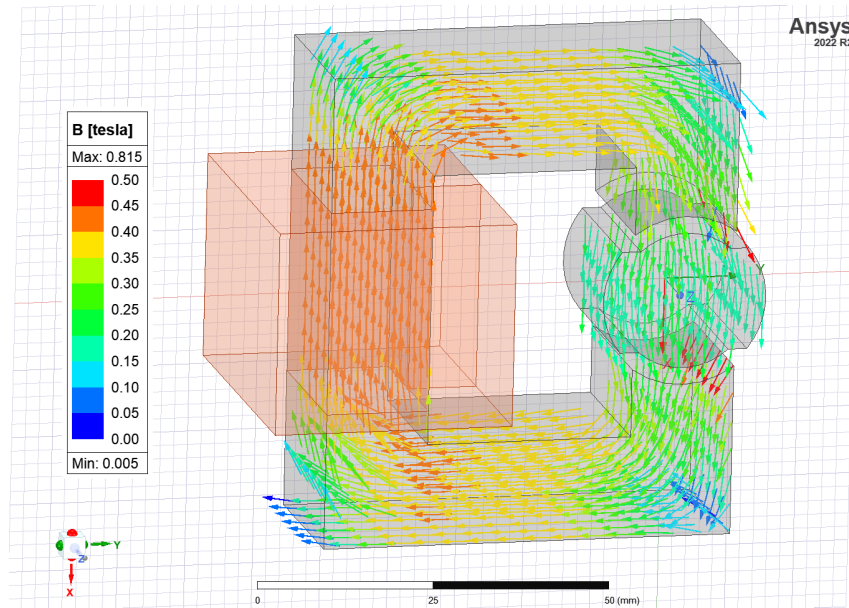


Figure 15: Flux density at 90° for non-linear material in 3D FEA

Also, as in the case for 2D analysis, inductance values and stored energy are calculated for the 3D model and tabulated in Table 8 and Table 9, respectively. When the results are compared with the 2D FEA results, it is observed that the inductance values are slightly higher in the 3D case which mas stems from the additional leakage losses presented in 3D, which can reduce the overall reluctance. The stored energy values are also slightly higher in the 3D case for the same reason. The torque profile from the 3D FEA simulations is plotted in Figure 16. The torque waveform is similar to the 2D case, but peak value is slightly lower.

Table 8: Inductance Values from 3D FEA for Non-Linear Material

Rotor Position	Inductance (mH)
0°	25.8
45°	24.1
90°	19.0

Table 9: Stored Energy Values from 3D FEA for Non-Linear Material

Rotor Position	Stored Energy (J)
0°	0.081
45°	0.075
90°	0.059

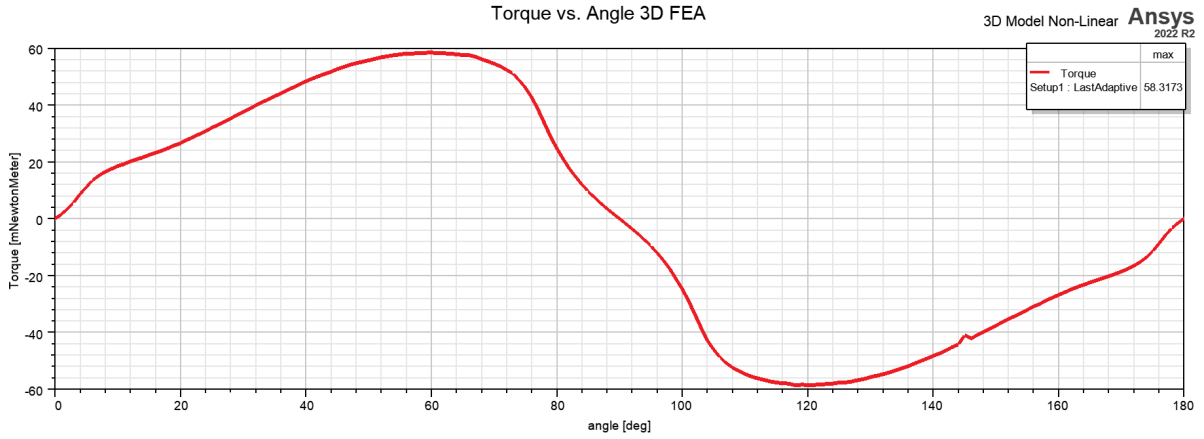


Figure 16: Torque variation with respect to time from 3D FEA simulations.

To summarize, the 3D FEA results show that three-dimensional effects can lead to slightly higher inductance and stored energy values due to additional leakage paths and more accurate representation of the geometry as the 2D represents and infinite geometry in the z-direction which is not the case. The torque profile is similar to the 2D case, but peak values may differ due to the more accurate representation of the magnetic field distribution in 3D. Overall, while 2D FEA can provide a good approximation for initial design and analysis, 3D FEA is necessary for more accurate predictions of machine performance, especially when complex geometries and non-linear material properties are involved. Overall, in the 3D analysis, actual geometry is modelled and thus the results are more realistic than the 2D case. However, 3D FEA is also more computationally intensive and time-consuming than 2D FEA, so it is important to balance the need for accuracy with the available computational resources when choosing between 2D and 3D analysis for machine design and optimization.

8 Conclusion

This project demonstrated how a variable reluctance machine generates torque by minimizing magnetic reluctance and how that performance can be captured with both analytical models and finite element simulations. The analytical model predicted the strong inductance swing between aligned and unaligned positions and assumed that constant DC excitation yields a sinusoidal torque waveform with zero average over a full revolution. The 2D FEA results then highlighted the importance of fringing flux and non-uniform flux distribution, which raise inductance values and make the torque waveform asymmetric compared to the ideal analytical case. When non-linear material behavior was included, saturation reduced inductance, stored energy, and peak torque significantly, confirming that linear assumptions lose validity under strong excitation. Finally, a control strategy that excites the coil only while inductance is increasing was shown to produce a positive average torque, making continuous rotation feasible. Together, these findings emphasize the value of combining analytical insight, FEA validation, and targeted control to accurately understand and operate a variable reluctance machine.

A Material Properties

This appendix lists the B-H curve of the electrical steel lamination selected for the FEA simulations.

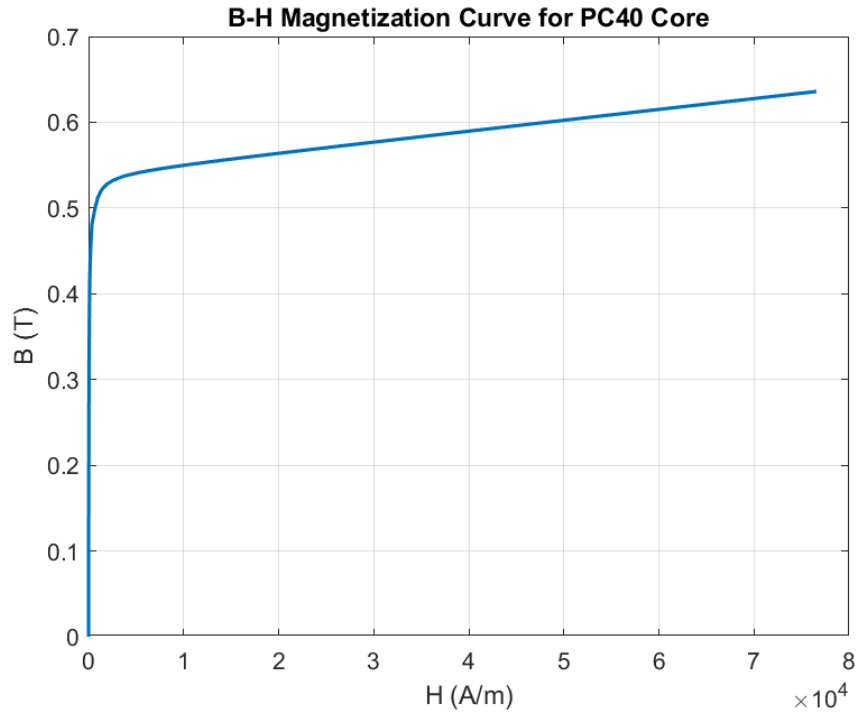


Figure 17: B-H curve of the PC40 core used in the FEA simulations.

B MATLAB Source Code

The MATLAB script used for the analytical calculations and plots in Q1 is available at `AnalyticalCalculation.m` in the project root directory.

References

- [1] W. G. Hurley and W. H. Wölflé, *Transformers and Inductors for Power Electronics: Theory, Design and Applications*, 1st ed. Chichester, UK: John Wiley & Sons, 2013. ISBN: 9781118544679.