
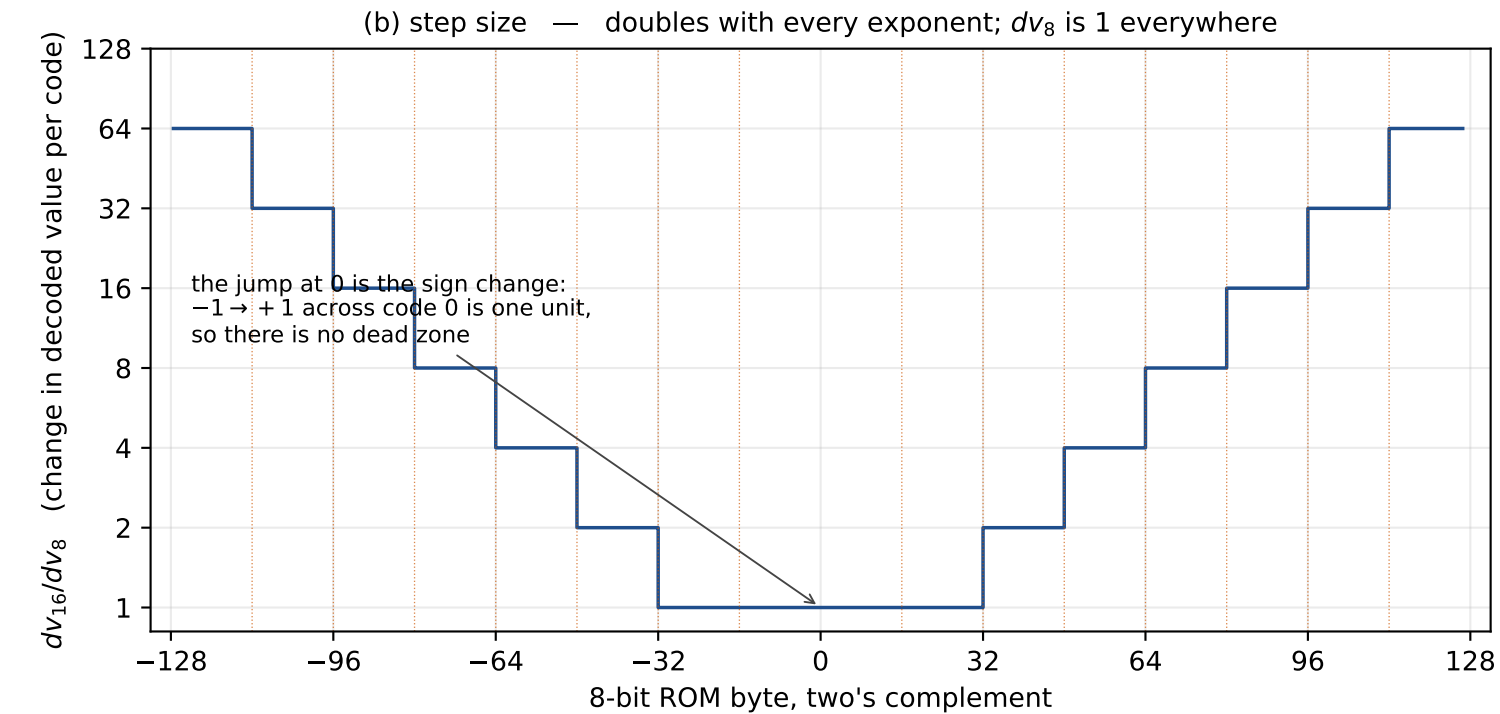


Roland U-110 wave ROM: 8-bit companded sample → 16-bit value

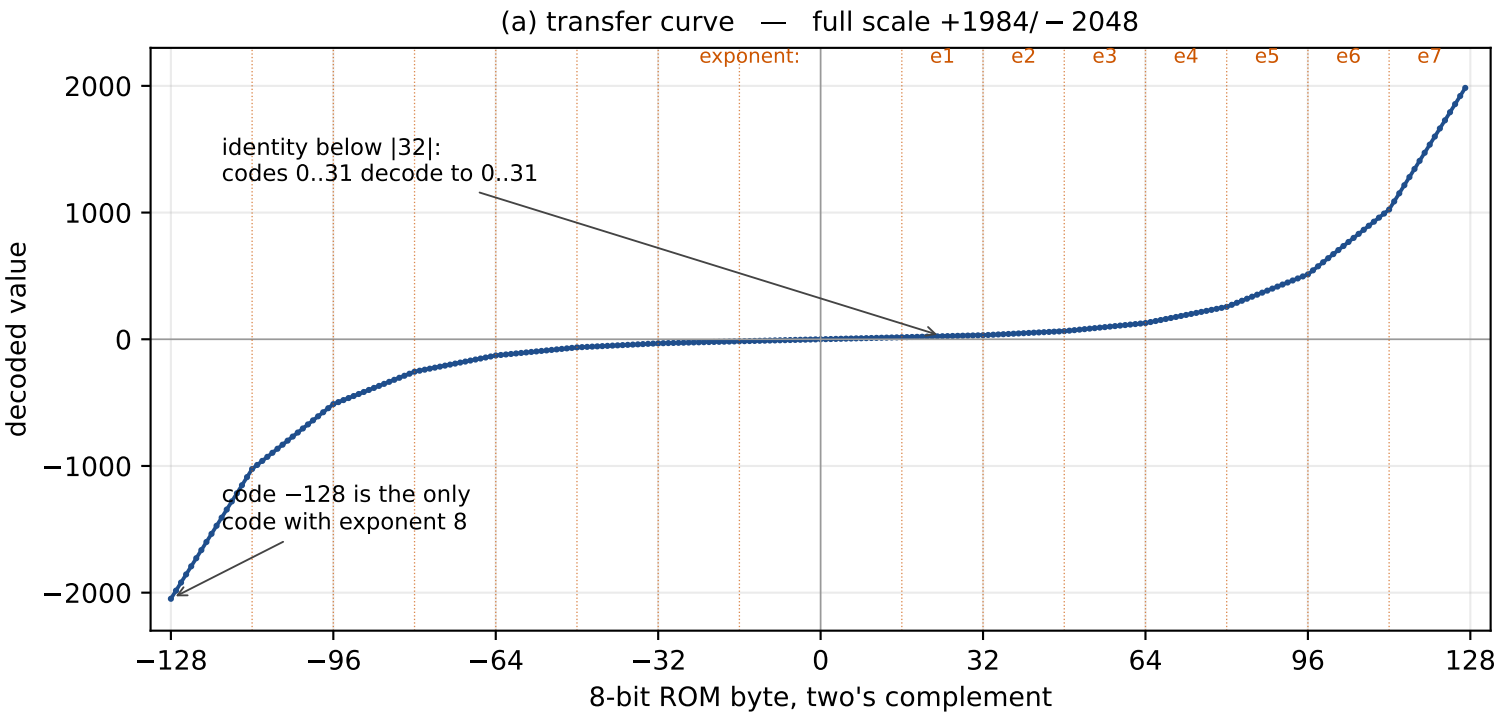

segment table (magnitude side; the sign comes from the byte)

e=0	codes	0..15	->	0..15	step	1
e=1	codes	16..31	->	16..31	step	1
e=2	codes	32..47	->	32..62	step	2
e=3	codes	48..63	->	64..124	step	4
e=4	codes	64..79	->	128..248	step	8
e=5	codes	80..95	->	256..496	step	16
e=6	codes	96..111	->	512..992	step	32
e=7	codes	112..127	->	1024..1984	step	64
e=8	code	128 only	->	2048	(only as -128)	