



Z GUIDE DETAIL

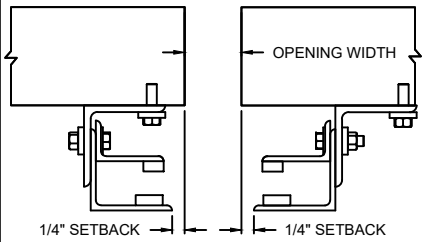


MIXED GUIDE DETAIL




FULL SLAT SECTION

HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

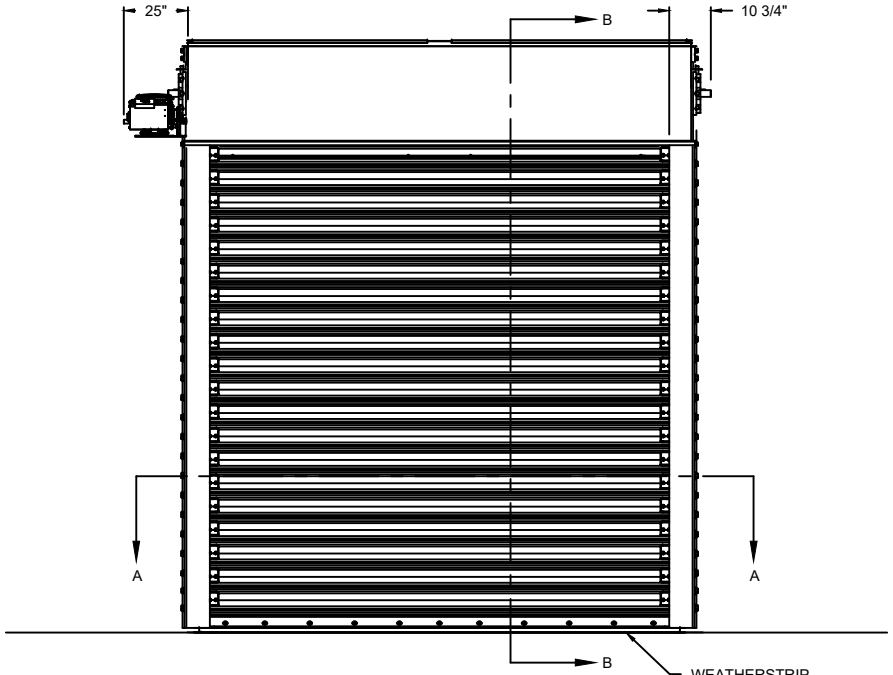


ELEVATION

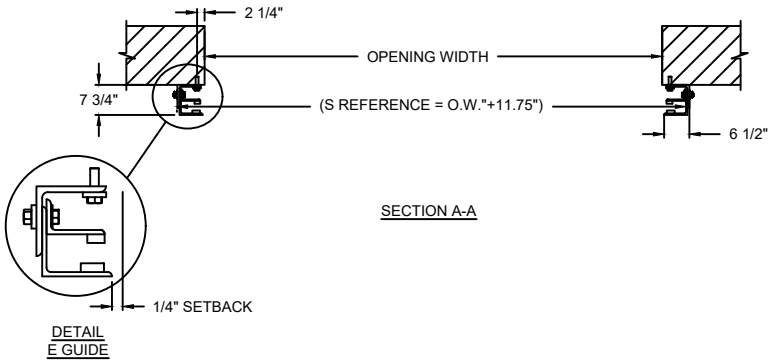

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

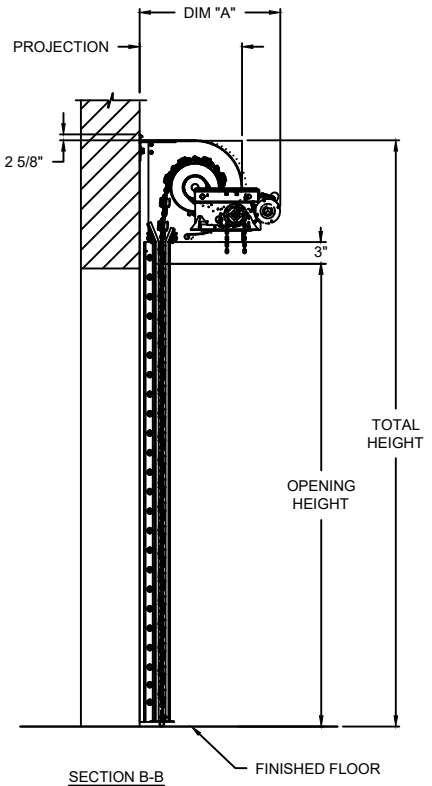

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	33-7/8"
6'-0" OR GREATER AND LESS THAN 10'-0"	35-7/8"
10'-0" OR GREATER	37-7/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH BENCH MOUNT	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

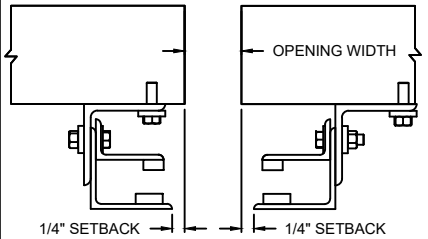


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

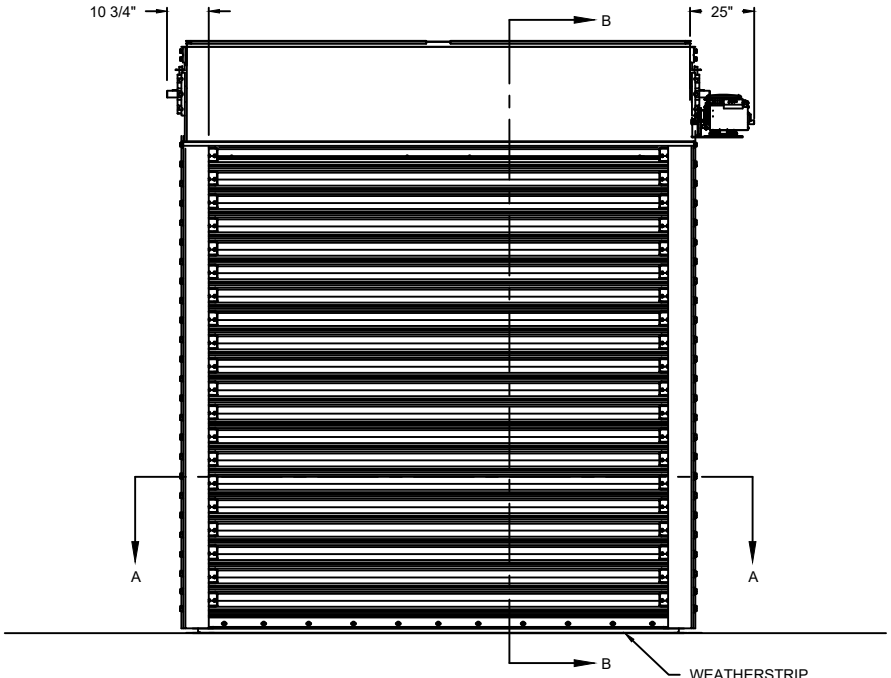


ELEVATION

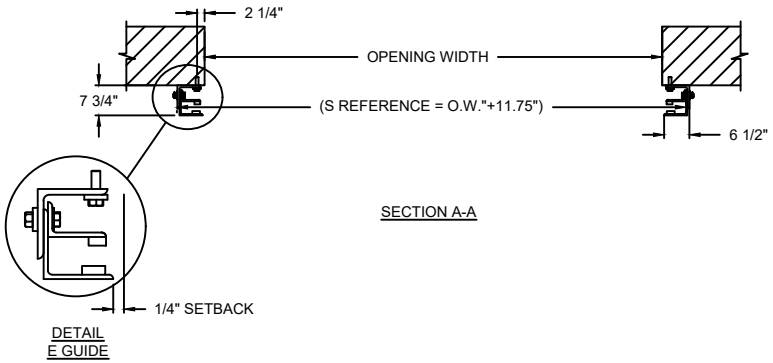

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

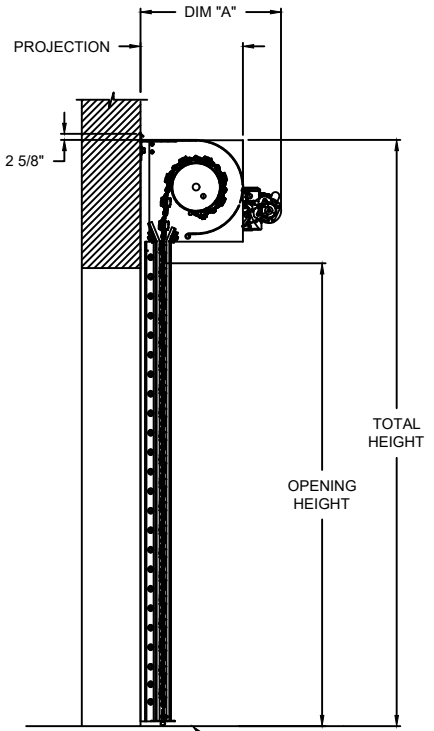

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	33-7/8"
6'-0" OR GREATER AND LESS THAN 10'-0"	35-7/8"
10'-0" OR GREATER	37-7/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH BENCH MOUNT	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

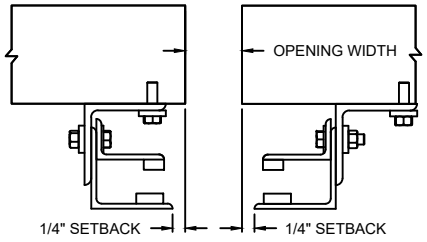


MIXED GUIDE DETAIL




FULL SLAT SECTION

HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

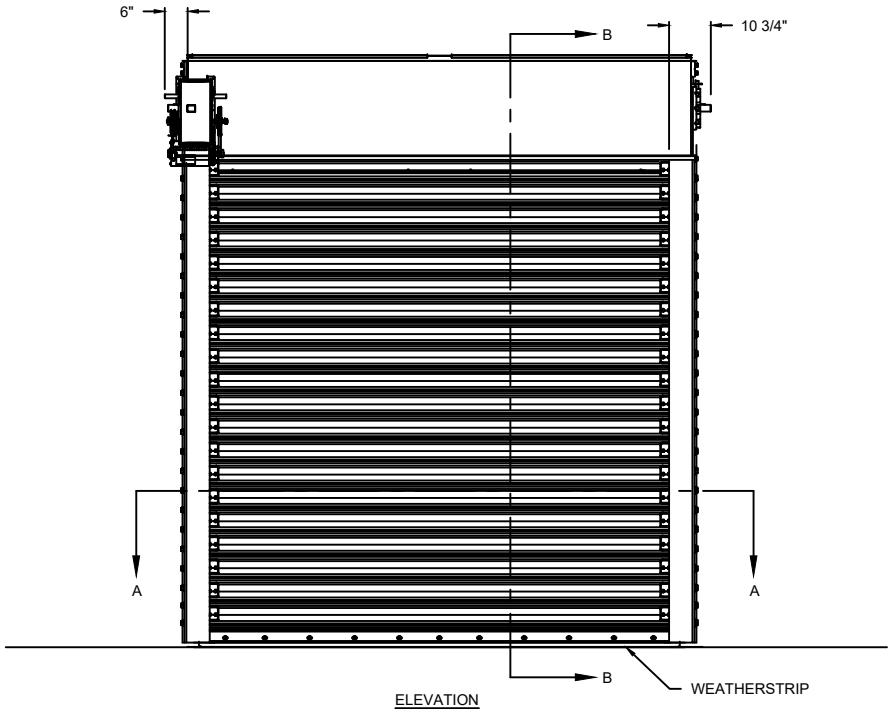


ELEVATION

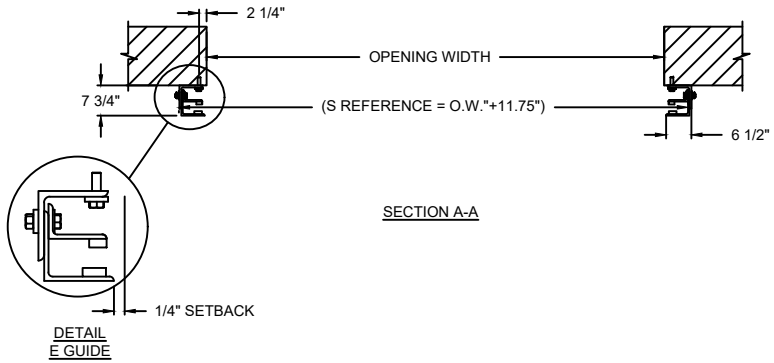

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

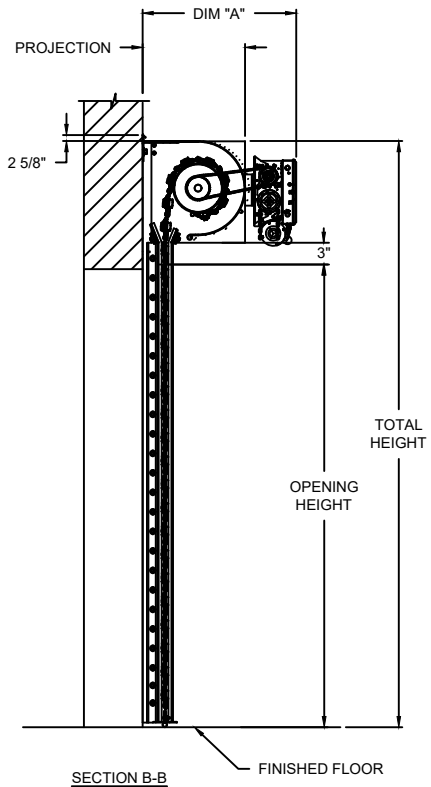

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	42-1/8"
6'-0" OR GREATER AND LESS THAN 10'-0"	44-1/8"
10'-0" OR GREATER	46-1/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH FRONT OF HOOD	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

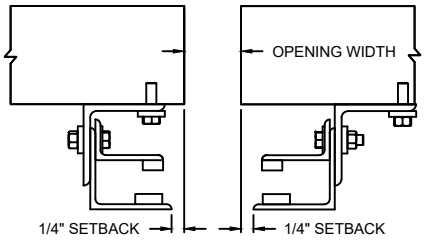


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

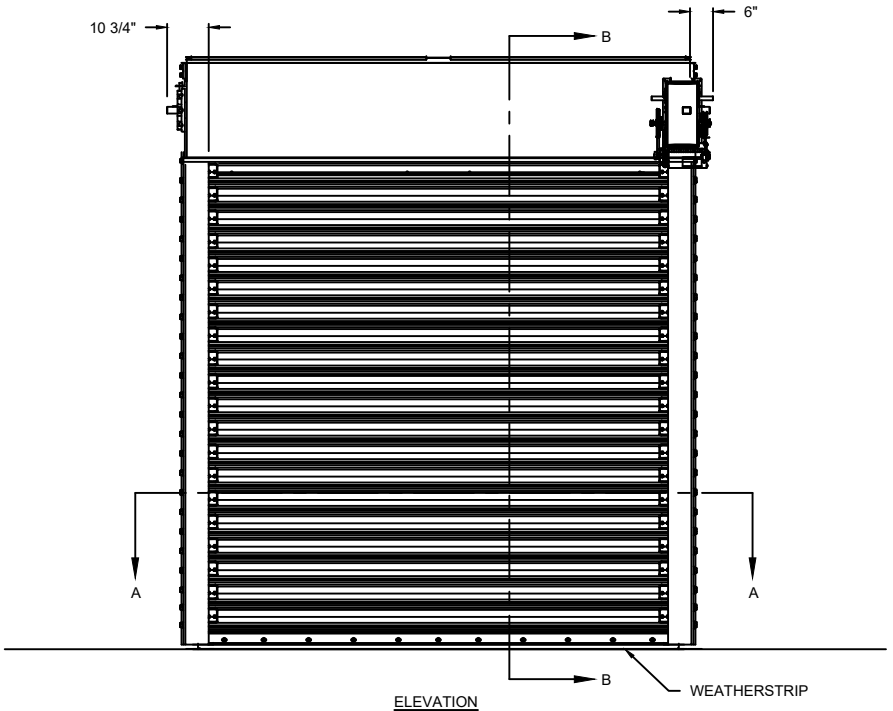


ELEVATION

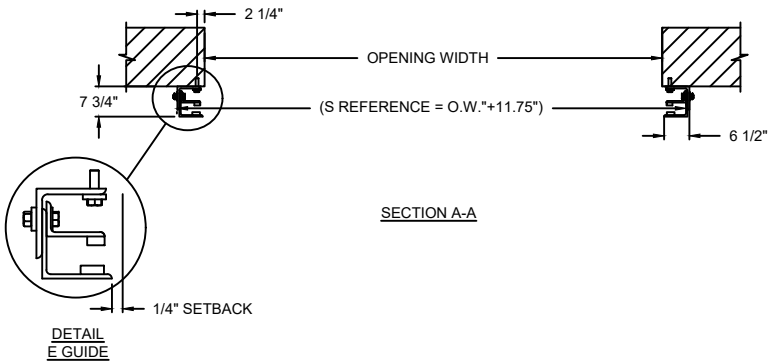

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

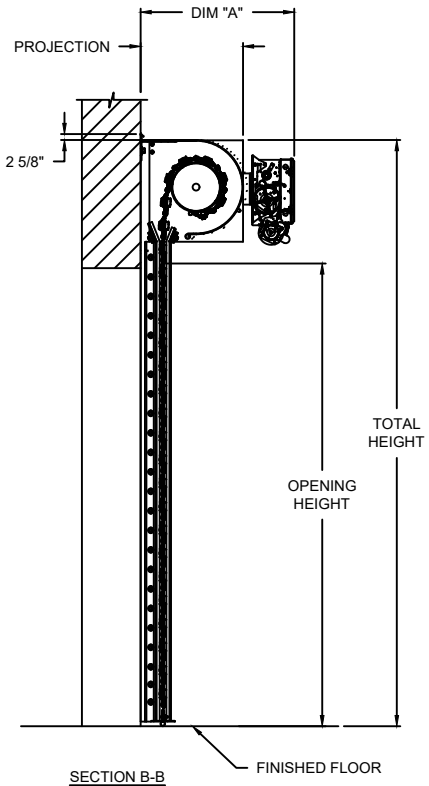

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	42-18"
6'-0" OR GREATER AND LESS THAN 10'-0"	44-1/8"
10'-0" OR GREATER	46-1/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH FRONT OF HOOD	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

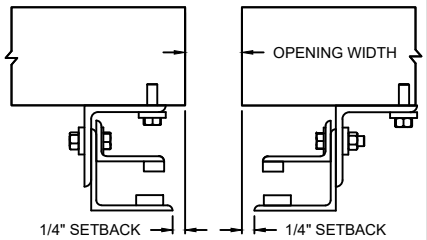


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

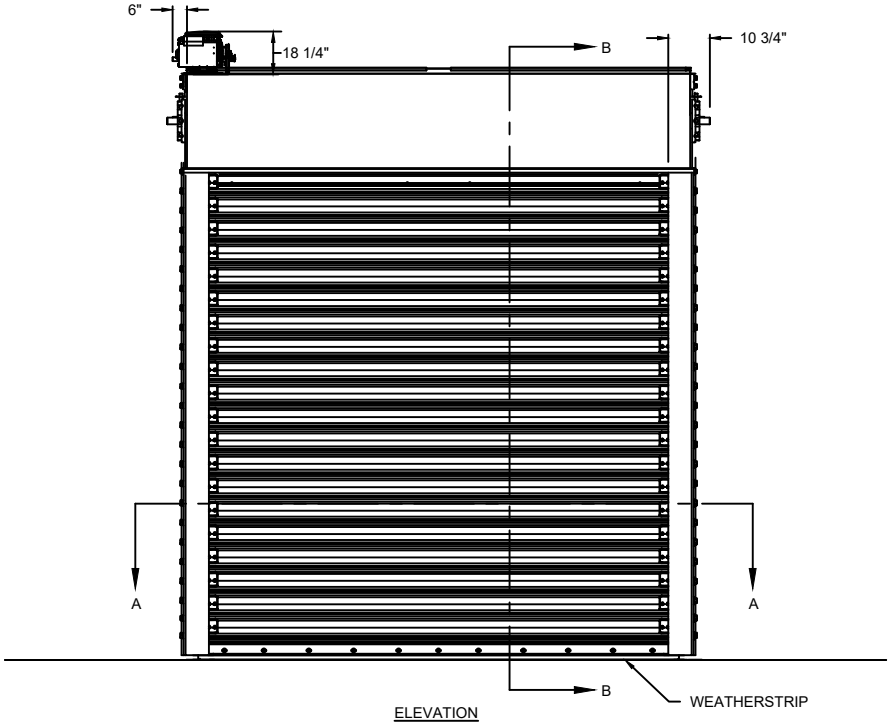


ELEVATION

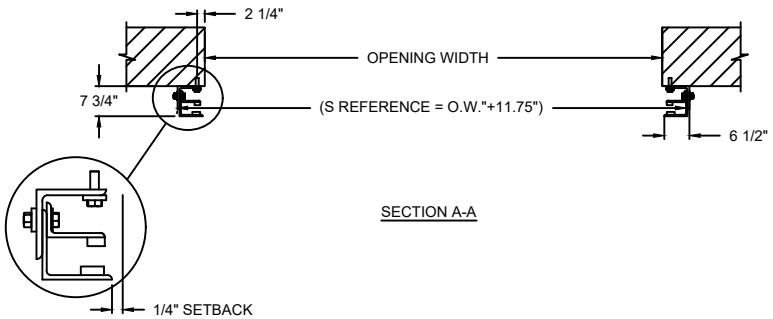

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

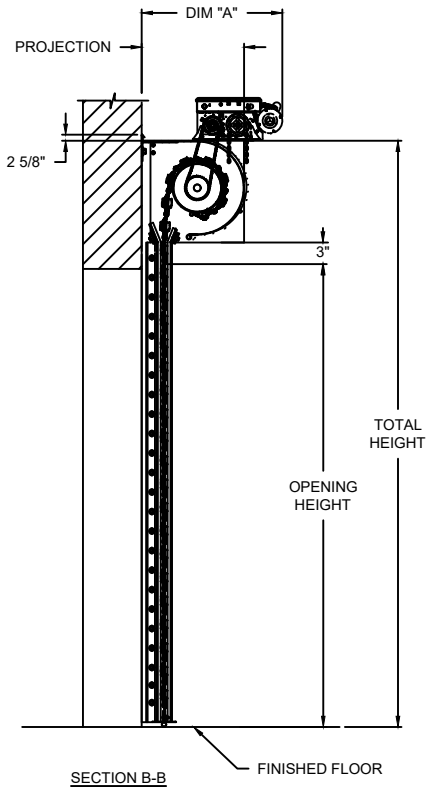

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	37-5/8"
6'-0" OR GREATER AND LESS THAN 10'-0"	39-5/8"
10'-0" OR GREATER	41-5/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH TOP OF HOOD	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

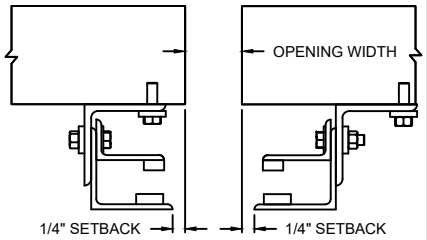


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

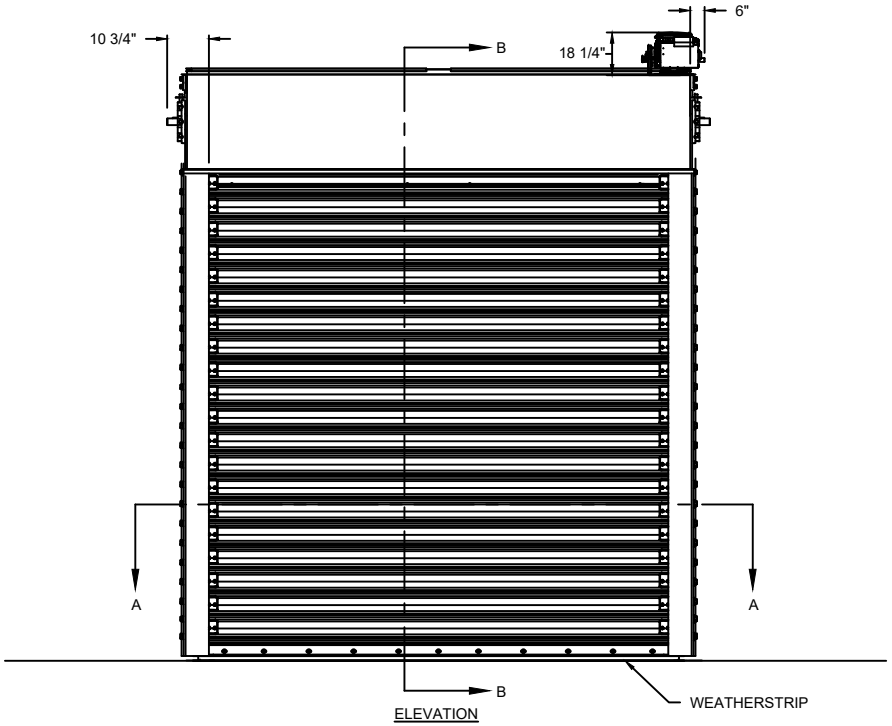


ELEVATION

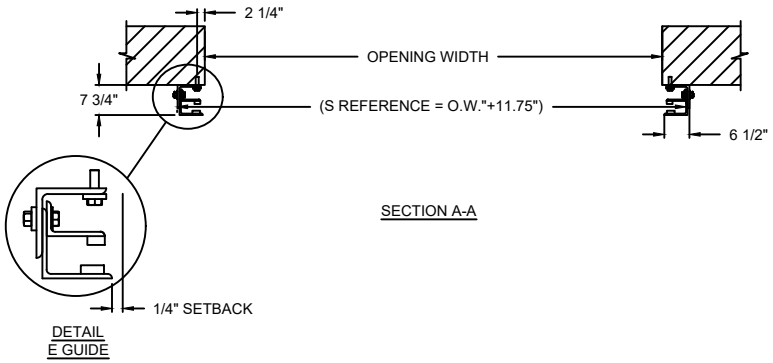

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

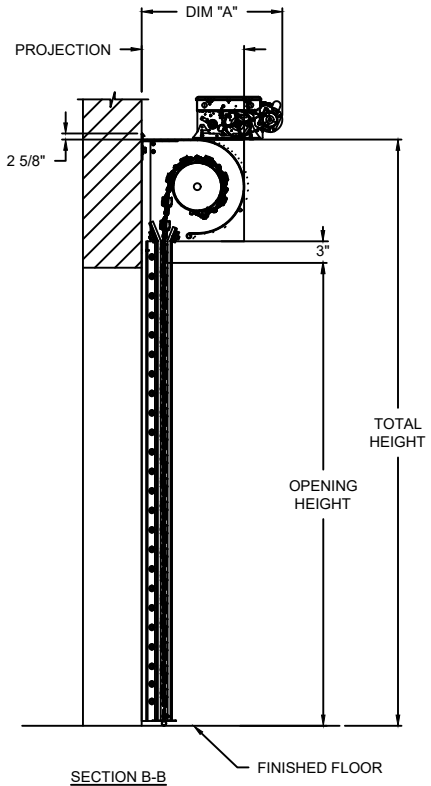

SECTION B-B

DOOR HEIGHT	DIM "A"
LESS THAN 6'-0"	37-5/8"
6'-0" OR GREATER AND LESS THAN 10'-0"	39-5/8"
10'-0" OR GREATER	41-5/8"


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH TOP OF HOOD	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

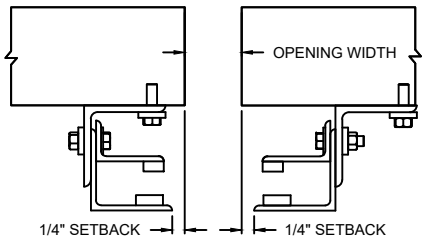


MIXED GUIDE DETAIL




FULL SLAT SECTION HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

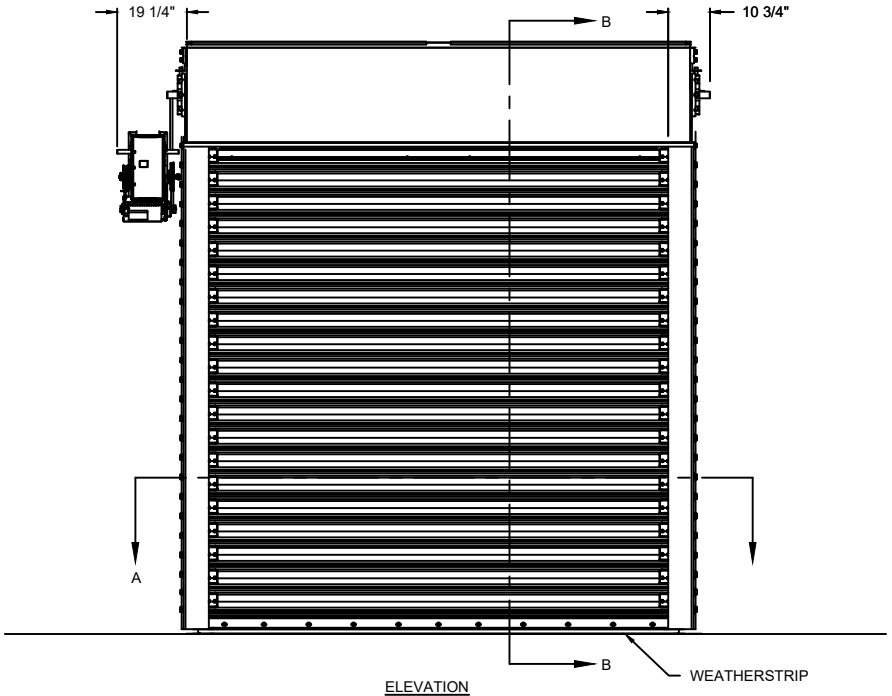


ELEVATION

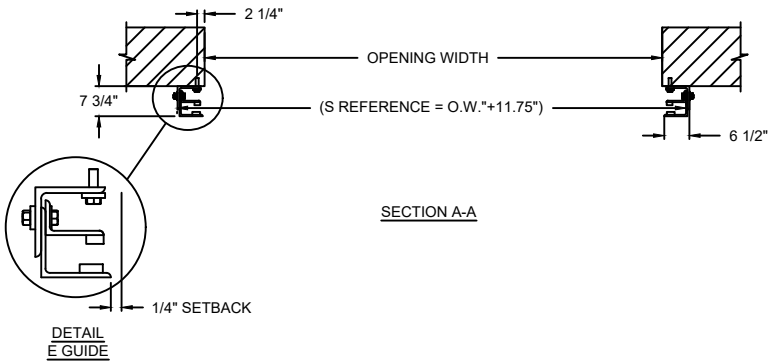

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

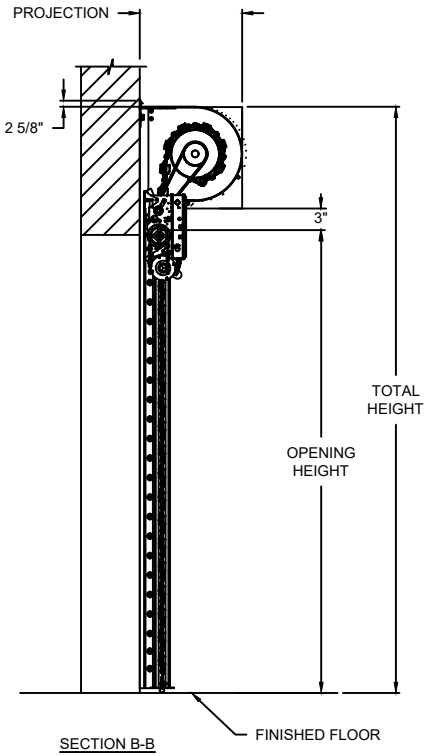

SECTION B-B


PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	LH WALL MOUNT	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		


EVERGUARD™

610FR FIRE RATED SHELTER DOOR


DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	



Z GUIDE DETAIL

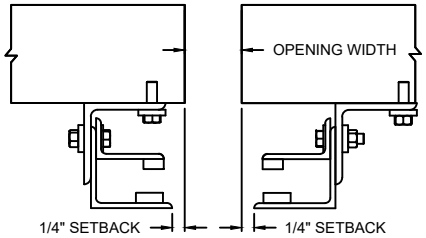


MIXED GUIDE DETAIL




FULL SLAT SECTION

HALF SLAT SECTION

OPTIONS	
OPENING WIDTH	
OPENING HEIGHT	
VOLTS OPTIONS	☐ 115-208-230V 1 PHASE 60HZ ☐ 208-230-460V 4 PHASE 60HZ ☐ 575V 3 PHASE 60HZ
GUIDE TYPE OPTIONS	☐ E GUIDES ☐ MIXED GUIDES ☐ Z GUIDES

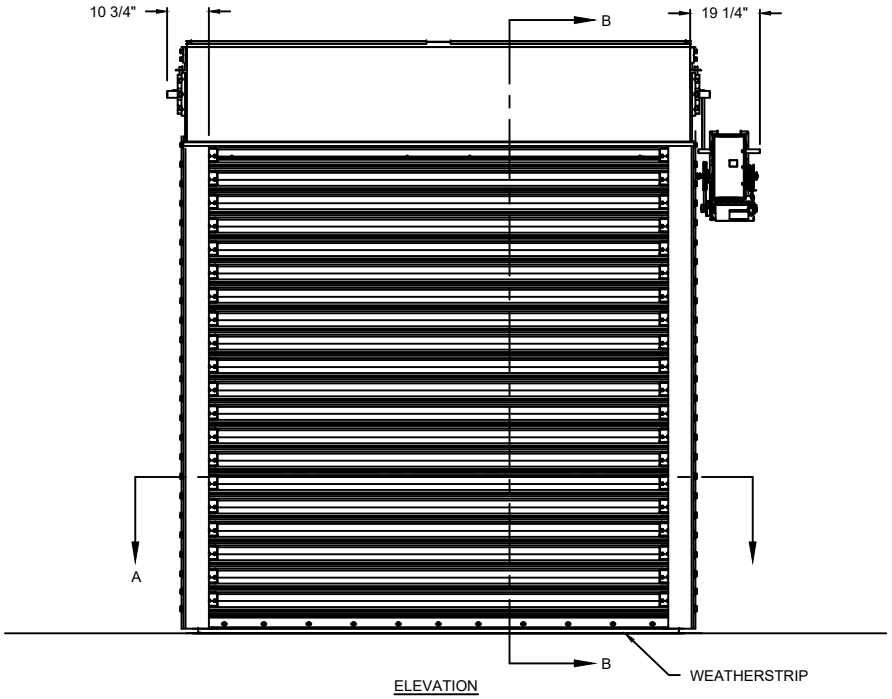


ELEVATION

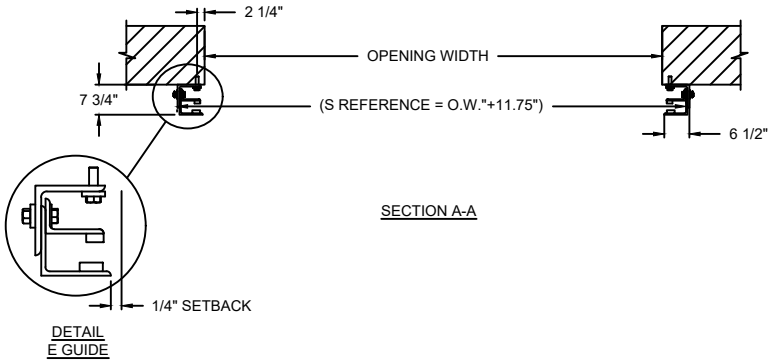

SECTION A-A

DETAIL
E GUIDE

MODEL	STANDARD MAX. VALUES	
	WIDTH	HEIGHT
610FR	11'	11'

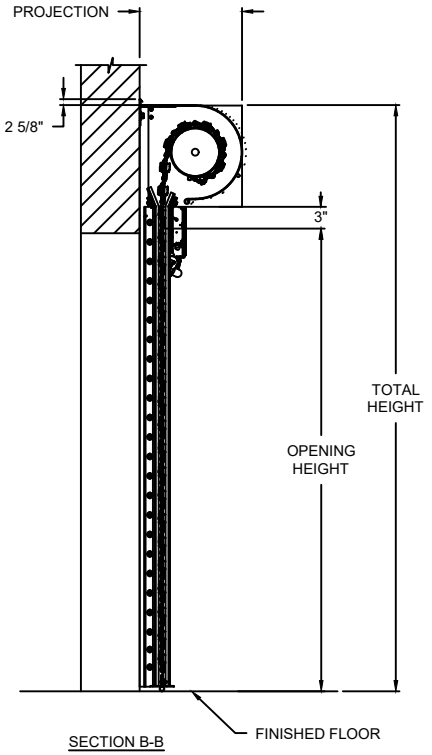

SECTION B-B

PROJECTION	
MIN.	MAX.
20" X 22"	32" X 34"

COMPONENT	MATERIAL	OPERATION	NOTES:
HOOD	24 GA. GALVANIZED STEEL	RH WALL MOUNT	RATINGS: FEMA / ICC500 ULB 4HR FIRE RATING
CURTAIN	12 GA. GALVANIZED STEEL		
GUIDES	STEEL ANGLES		
BOTTOM BAR	STEEL ANGLES		

EVERGUARD™

610FR FIRE RATED SHELTER DOOR

DWG. NO.	DATE:	The Genuine. The Original. OVERHEAD DOOR
SHEET	BY:	