

# BIOFLUID MECHANICS

## ON COMPUTATIONAL FLUID DYNAMICS

Vincent Belpaire

Faculty of Architecture and Engineering  
Ugent


# Table of Contents

- 1 Meshing
- 2 Running an initial simulation
- 3 Mesh sensitivity analysis



# Table of Contents

- 1 Meshing
- 2 Running an initial simulation
- 3 Mesh sensitivity analysis

# The Aneurysm

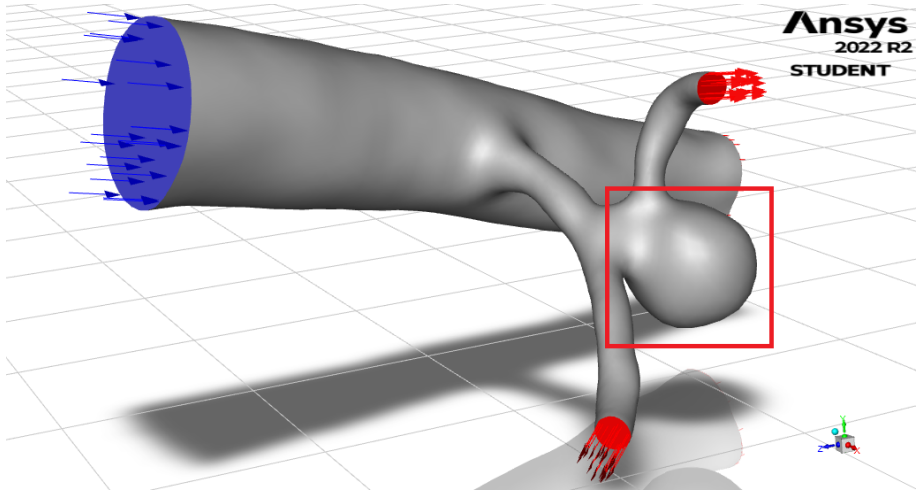

# Mesh element types

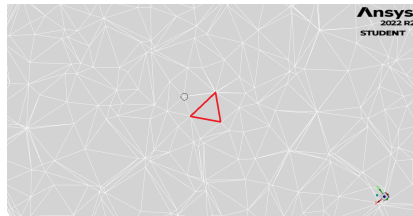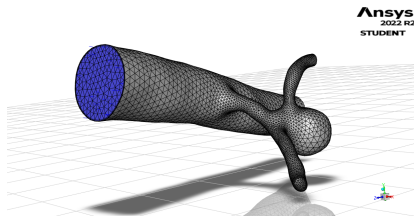


→ in bulk tetrahedral (4 faces)




Tetrahedron

# Mesh element types

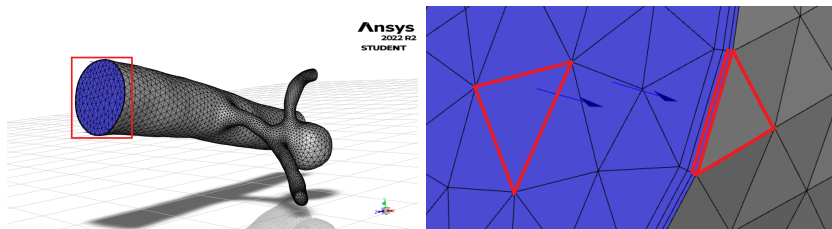





- in bulk tetrahedral (4 faces)
- at boundaries prism



Triangular Prism

# Mesh comparison

file	Element Type	$N$	Bulk View
Mesh1.cas	hexahedral, prism	496718	
Mesh2.cas	tetrahedral, prism	80846	
Mesh3.cas	tetrahedral, prism	319342	
Mesh4.cas	tetrahedral, prism	486960	

# Table of Contents

- 1 Meshing
- 2 Running an initial simulation**
- 3 Mesh sensitivity analysis



# Blood modelling

How is blood modelled by setting these values (density and viscosity) to be constant? Does this correspond to the normal behaviour of blood?

# Blood modelling

How is blood modelled by setting these values (density and viscosity) to be constant? Does this correspond to the normal behaviour of blood?

- At large scales and relative high velocities, blood can be assumed to have a constant density (incompressible flow) and viscosity.

# Blood modelling

How is blood modelled by setting these values (density and viscosity) to be constant? Does this correspond to the normal behaviour of blood?

- At large scales and relative high velocities, blood can be assumed to have a constant density (incompressible flow) and viscosity.
- At small scales (around the size of a RBC) and relative slow velocities, blood can no longer be assumed homogeneous and it's apparent viscosity becomes very important.

# Blood modelling

How is blood modelled by setting these values (density and viscosity) to be constant? Does this correspond to the normal behaviour of blood?

- At large scales and relative high velocities, blood can be assumed to have a constant density (incompressible flow) and viscosity.
- At small scales (around the size of a RBC) and relative slow velocities, blood can no longer be assumed homogeneous and it's apparent viscosity becomes very important.
- ⇒ This model is physiological.


# Results of initial simulation

# Results of initial simulation

→ Mesh2 has the lowest number of elements  $\Rightarrow$  Mesh2 is the coarsest mesh


# Results of initial simulation

- Mesh2 has the lowest number of elements  $\Rightarrow$  Mesh2 is the coarsest mesh
- The residuals OK!

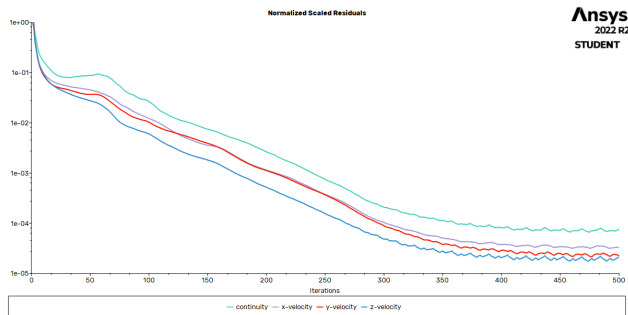

# Results of initial simulation

- Mesh2 has the lowest number of elements  $\Rightarrow$  Mesh2 is the coarsest mesh
- The residuals OK!
- Pressure contour: as expected, flow goes from higher pressures to lower pressures

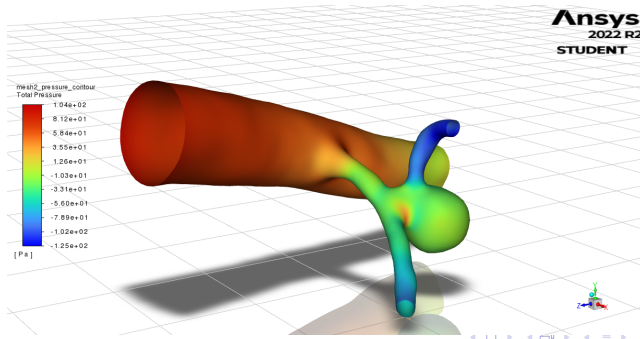



## Results of initial simulation

- Mesh2 has the lowest number of elements  $\Rightarrow$  Mesh2 is the coarsest mesh
- The residuals OK!
- Pressure contour: as expected, flow goes from higher pressures to lower pressures
- Conservation of mass?

Mass Flow Rate	[kg/s]
inlet.1.1	0.078264423
outlet-1.1.1	-0.0039132212
outlet-2.1.1	-0.0039132212
outlet-3.1.1	-0.070437981
Net	-1.3877788e-17

→ Net mass flow rate  $\approx 0$   
 $\Rightarrow$  mass is conserved!

# Table of Contents

- 1 Meshing
- 2 Running an initial simulation
- 3 Mesh sensitivity analysis

# Mesh sensitivity

# Mesh sensitivity

## Mesh sensitivity

Consider a quantity  $A$  calculated via computational fluid dynamics with a mesh size  $N$ . Let's say that  $A_1$  is calculated with a mesh size  $N_1$  and  $A_2$  is calculated with a mesh size  $N_2$ , with  $N_2 > N_1$ . Then the mesh sensitivity, here denoted as  $\epsilon$ , between  $A_1$  and  $A_2$  is defined as

$$\epsilon = \frac{|A_2 - A_1|}{N_2 - N_1} = \frac{|\Delta A|}{\Delta N}.$$



# Mesh sensitivity



## Mesh sensitivity

Consider a quantity  $A$  calculated via computational fluid dynamics with a mesh size  $N$ . Let's say that  $A_1$  is calculated with a mesh size  $N_1$  and  $A_2$  is calculated with a mesh size  $N_2$ , with  $N_2 > N_1$ . Then the mesh sensitivity, here denoted as  $\epsilon$ , between  $A_1$  and  $A_2$  is defined as



$$\epsilon = \frac{|A_2 - A_1|}{N_2 - N_1} = \frac{|\Delta A|}{\Delta N}.$$

$\epsilon$  indicates how much accuracy the model gains if the mesh size would be increase by  $\Delta N$  elements. If  $\epsilon$  is very small and the computational time relatively large then it would not be favorable to increase the mesh size.

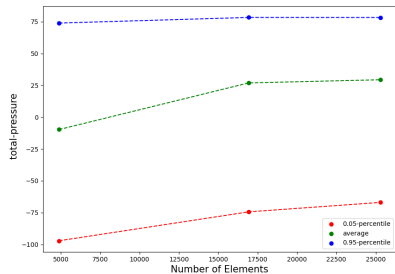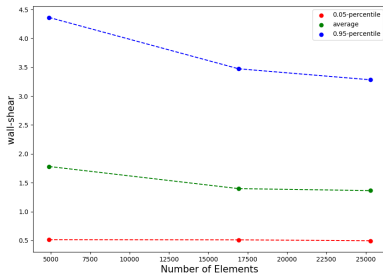

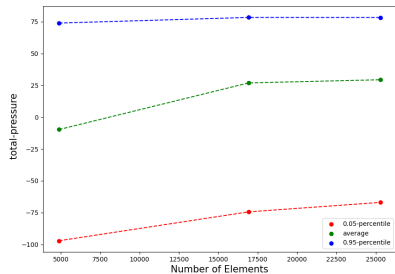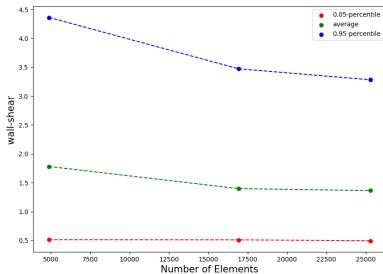



Observations:

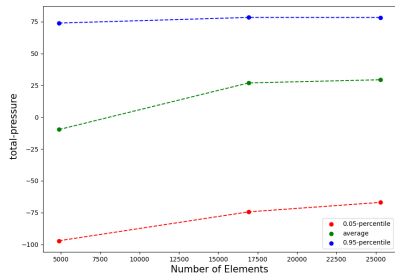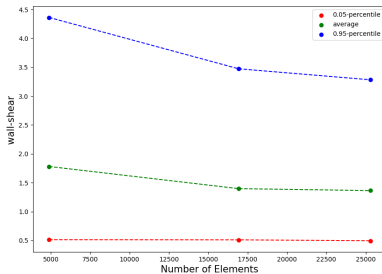

Observations:



→ From Coarse to Medium: relative high improvement



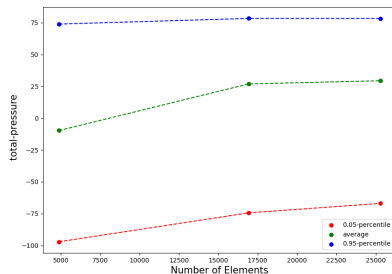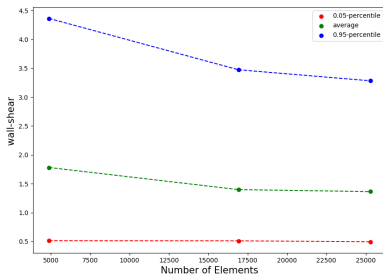

### Observations:

- From Coarse to Medium: relative high improvement
- From Medium to Fine: relative low improvement

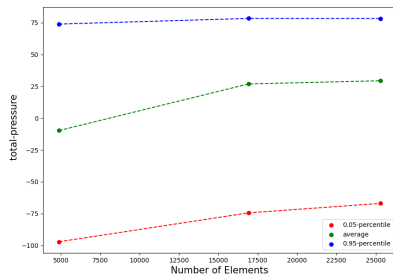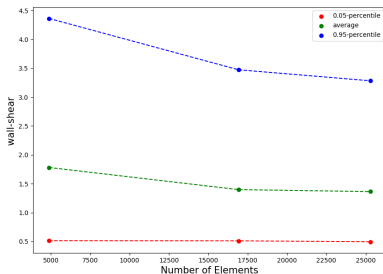



### Observations:

- From Coarse to Medium: relative high improvement
- From Medium to Fine: relative low improvement
- Estimate computation time (all **converged!**):

Coarse:  $T < 3$  min

Medium:  $2 \text{ min} < T < 4$  min

Fine:  $5 \text{ min} < T$

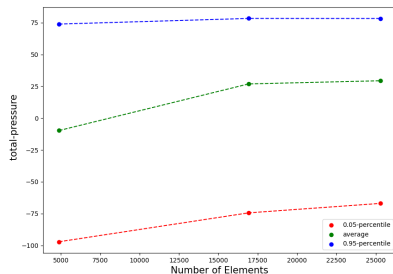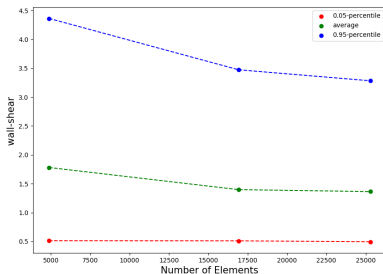



### Observations:

- From Coarse to Medium: relative high improvement
- From Medium to Fine: relative low improvement
- Estimate computation time (all converged!):

Coarse:  $T < 3$  min

Medium:  $2 \text{ min} < T < 4 \text{ min}$

Fine:  $5 \text{ min} < T$

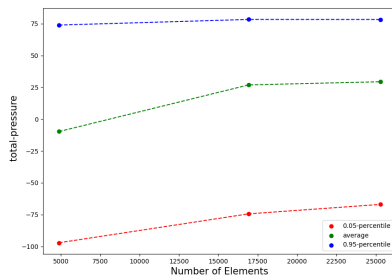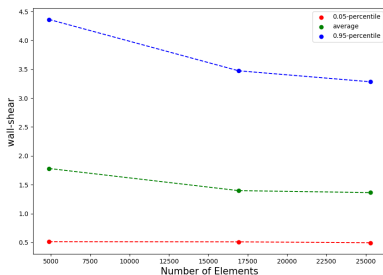

### Observations:

- From Coarse to Medium: relative high improvement
- From Medium to Fine: relative low improvement
- Estimate computation time (all converged!):

Coarse:  $T < 3$  min

Medium:  $2 \text{ min} < T < 4 \text{ min}$

Fine:  $5 \text{ min} < T$

- ⇒ Medium mesh will suffice

# Reflection

# Reflection

- Why usage of percentiles and not minimum or maximum?

# Reflection

- Why usage of percentiles and not minimum or maximum?  
→ preventing outliers to influence conclusion

# Reflection

- Why usage of percentiles and not minimum or maximum?  
→ preventing outliers to influence conclusion
- More advanced techniques for mesh sensitivity analysis?



# Reflection

- Why usage of percentiles and not minimum or maximum?
  - preventing outliers to influence conclusion
- More advanced techniques for mesh sensitivity analysis?
  - Numerical Mathematics: knowing the structure of the CFD model and its properties

**Me: If I'm patient, eventually ANSYS will solve. I'll just do something in the meantime**

**Inner Me: Loosen the convergence criteria and coarsen the mesh. It'll solve faster**

