
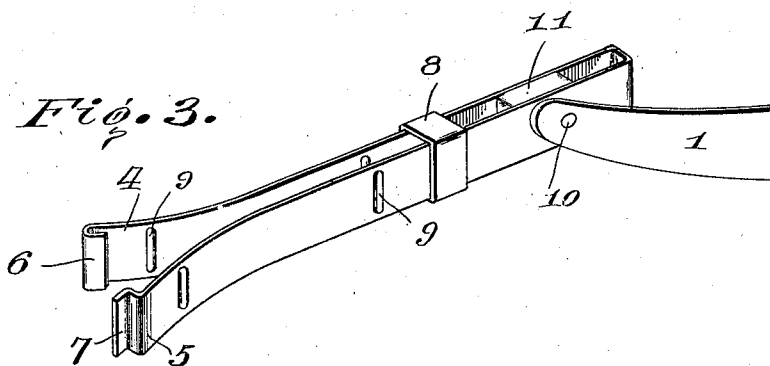
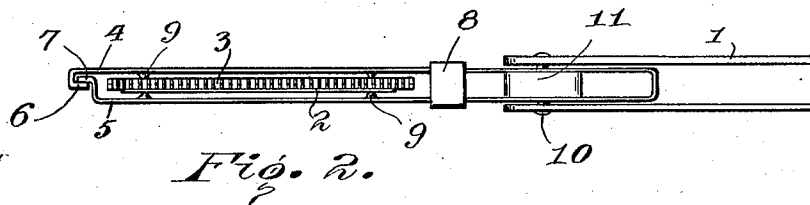


E. A. ZIMMERMAN.
 COMBINED HAIR PLANE AND SAFETY RAZOR.
 APPLICATION FILED FEB. 20, 1920.

1,342,494.

Patented June 8, 1920.

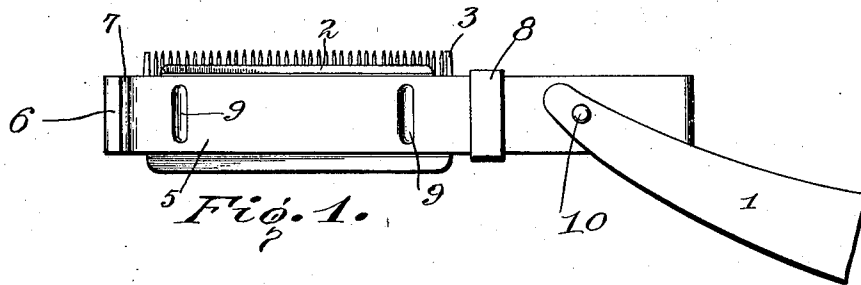

Inventor
 Edgar A. Zimmerman.

Donald L. Maason.

Attorney

UNITED STATES PATENT OFFICE.

EDGAR A. ZIMMERMAN, OF SHAMOKIN, PENNSYLVANIA.

COMBINED HAIR-PLANE AND SAFETY-RAZOR.

1,342,494.

Specification of Letters Patent.

Patented June 8, 1920.

Application filed February 20, 1920. Serial No. 360,097.

To all whom it may concern:

Be it known that I, EDGAR A. ZIMMERMAN, a citizen of the United States, residing at #18 North 6th street, Shamokin, in the county of Northumberland and State of Pennsylvania, have invented certain new and useful Improvements in Combined Hair-Planes and Safety-Razors, of which the following is a specification.

This invention relates to combined hair planes and safety razors, and more particularly to that type which may be inclosed in a handle similar to a straight razor.

An object of this invention is to provide a combined hair plane and safety razor which will permit the user to secure a firm grasp upon it, even though the hands are wet or soapy.

Another object is to provide suitable means of holding the comb and cutting blade or blades in operative position.

A still further object is to provide an efficient and easily operated means whereby the comb and blade may be readily disengaged from their holding members for cleaning.

Other objects will appear as the description proceeds.

With these objects stated in view, the invention consists in a novel combination and arrangement of parts to be hereinafter described and claimed, and in order that the same may be better understood, reference is had to the accompanying drawings forming a part of this specification.

Figure 1 is a side elevation.

Fig. 2 is a plan view of the device.

Fig. 3 is a perspective view with the comb and blade removed.

The handle 1 is of the ordinary type of handle used in connection with straight razors. For holding the blade or blades 2 and comb 3 in operative position, I employ a one-piece resilient clamping member having two longitudinal extending clamping members or arms 4 and 5 on each side of the said blades and comb, said members 4 and 5 being slightly bowed inwardly at or near their central portion. The clamping member 4 extends a slight distance beyond the member 5, and has its outer end bent back to provide a catch or retainer 6. The member 5 is bent in slightly at its outer end and is formed into an end portion or tip 7. This tip 7 is adapted to engage and lock in the said catch or retainer 6, so that the blade or blades and comb will be securely held at

their outer ends. I provide a slidable collar or band member 8 near the inner end of the clamping members, and positioned around the same, which when slid toward the blade and comb, causes them to be securely and rigidly locked in operative position. In addition, I also provide a pair of inwardly extending indentations 9 on the inner face of each clamping member 4 and 5, and opposite each other, for more readily holding the blades and comb in position. It will be understood that either one or two blades may be used with my improved hair plane and safety razor. A pivot pin 10 extends through the said handle 1 and clamping members 4 and 5. I also provide a suitable washer or spacing block 11 to fit over said pivot pin 10, and positioned between the clamping members.

In operation, supposing the blade or blades and comb are in position, and it becomes desirable to clean them. In this case, it is only necessary to slide the collar 8 back toward the pivot pin 10, grasp the free end of the clamping members with one hand, and the handle with the other hand. Then, by having the handle at right angles to the clamping members, or in alinement therewith, and by giving the said handle a turning motion in the first case or a flexing motion in the latter case, the tip 7 will be caused to disengage from the retainer 6. When the blades and comb are not in position, the washer or spacing block 11 will act as the pivot, and the same effect may be had, as though the blades and comb were in position. The clamping members may be housed in the handle, as in a straight razor.

Having thus described my invention what I claim as new and desire to secure by Letters Patent of the United States is:

1. A device of the character described comprising a handle, clamping means pivotally attached thereto, said clamping means comprising a pair of resilient clamping members permanently attached at their inner ends, and a comb and blade or blades positioned between said clamping members, substantially as described.

2. A device of the character described comprising a handle, clamping means pivotally attached thereto, said clamping means comprising a pair of resilient clamping members, a comb and blade or blades positioned between said clamping members, and locking means formed upon the free ends of

said clamping members, for holding the parts in operative position.

3. A device of the character described comprising a handle, clamping means pivotally attached thereto, said clamping means comprising a pair of resilient clamping members, a comb and blade or blades positioned between said clamping members, a catch formed at the free end of said members and a slidable ring or collar positioned over said members, and positioned between said comb and blade and the handle.

4. A device of the character described comprising a handle, clamping means pivotally attached thereto, said clamping means comprising a pair of resilient clamping members, a comb and blade or blades positioned between said clamping members, a catch formed at the free end of said members and a slidable ring or collar positioned about said members between the comb and

blade and the handle, and a spacing block or washer positioned around said pivoting means, between the said clamping members, whereby the catch at the free end of said members will be disengaged upon a flexing motion of the said handle.

5. A device of the character described comprising a handle, spaced resilient clamping members pivoted thereto, said clamping members being substantially parallel and held in spaced relation at the pivotal connection with the handle.

6. A device of the character described comprising a handle, spaced resilient clamping members pivoted thereto, a spacing block, said clamping members being substantially parallel and held in spaced relation at the pivotal connection with the handle by means of said block.

In testimony whereof I affix my signature.
EDGAR A. ZIMMERMAN.