

April 29, 1941.







J. J. KURTZ

2,240,406

VENTILATOR

Filed Dec. 21, 1939

2 Sheets-Sheet 1

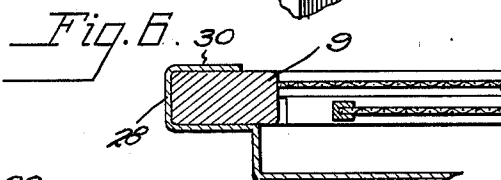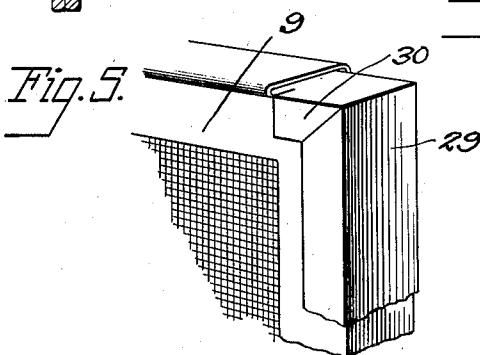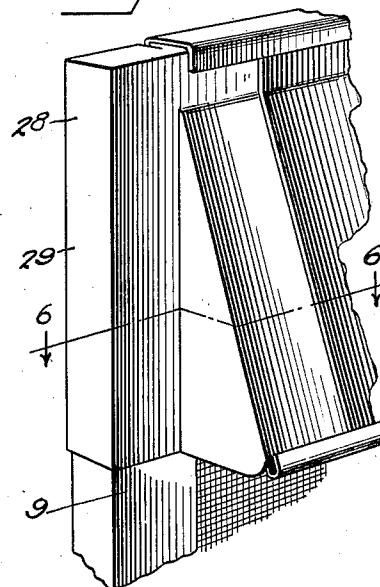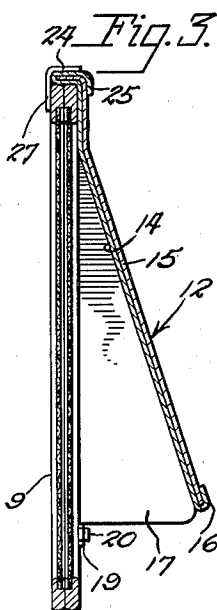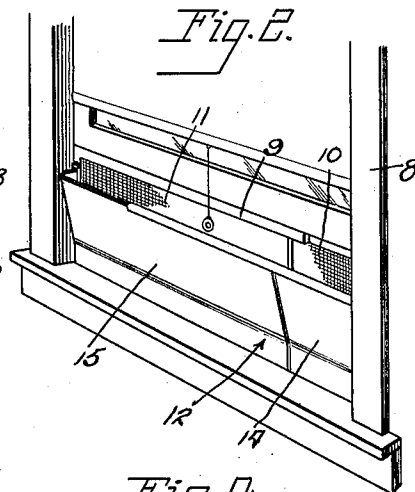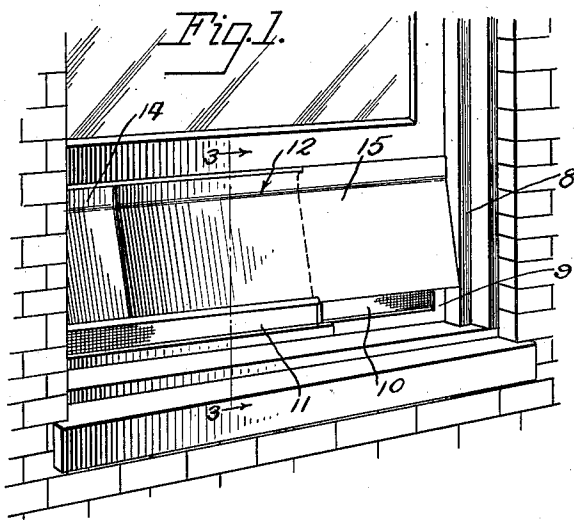

Inventor
Joseph J. Kurtz

By *Wason Fenwick & Lawrence*
Attorneys

April 29, 1941.



J. J. KURTZ

2,240,406

VENTILATOR

Filed Dec. 21, 1939

2 Sheets-Sheet 2

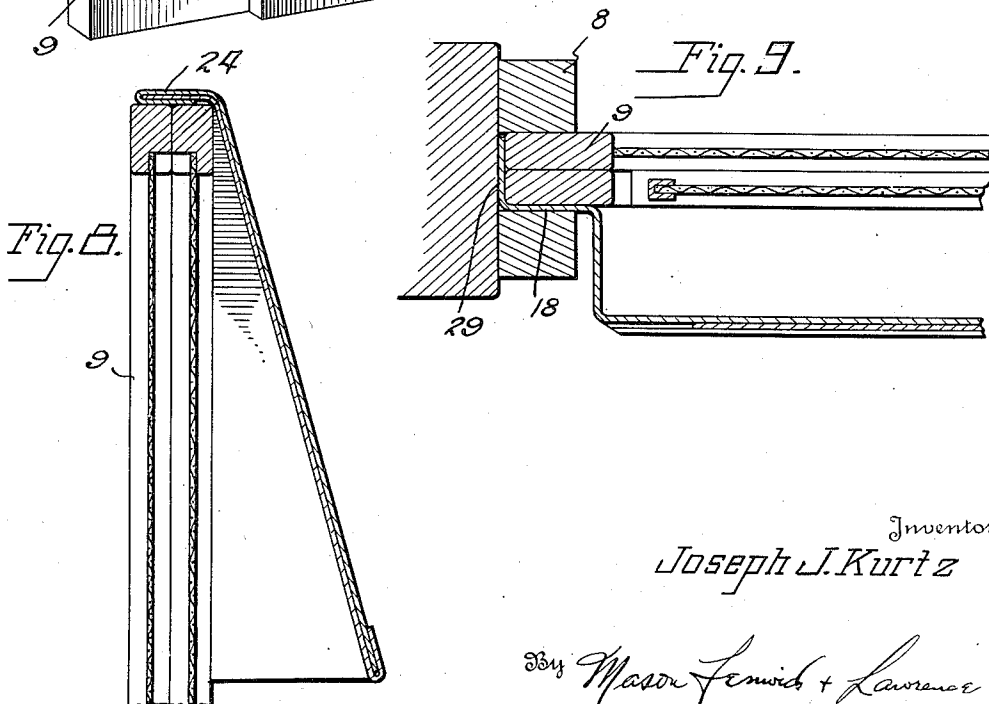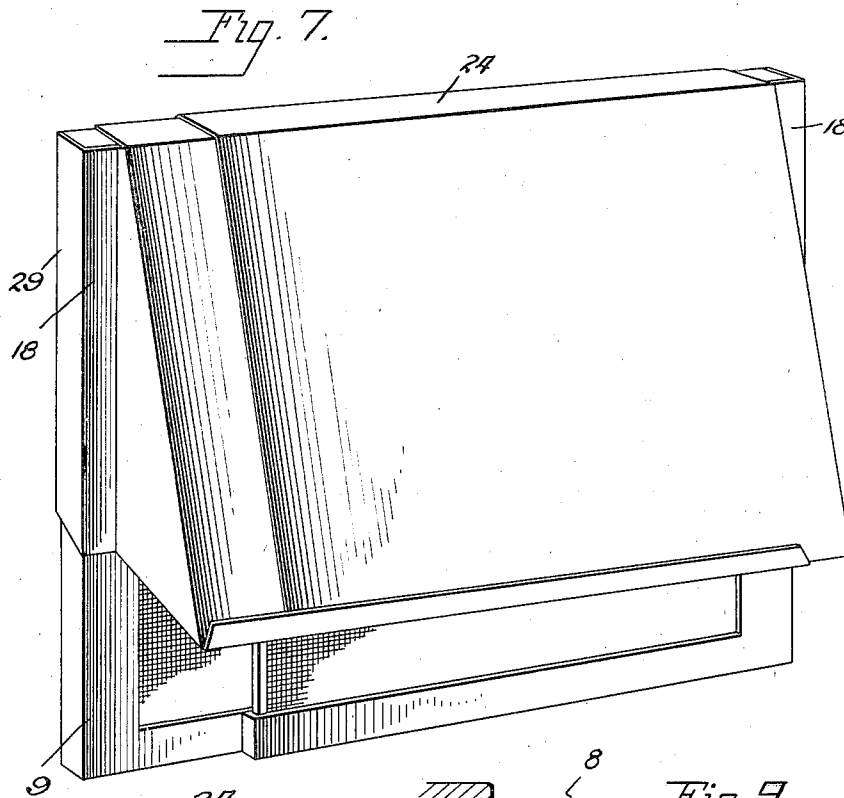

Inventor
Joseph J. Kurtz

By *Mason Fenwick + Lawrence*
Attorneys

UNITED STATES PATENT OFFICE

2,240,406

VENTILATOR

Joseph J. Kurtz, Shamokin, Pa.

Application December 21, 1939, Serial No. 310,454

2 Claims. (Cl. 156—15)

This invention relates to ventilator screens; and more particularly, one that may serve either as a rain shield or an air ventilator, merely by reversing the screen so that in one case the metal attachment is on the outside acting as a rain shield, and on the inside as an air ventilator.

In one of the modified forms, the metal attachment may be reversed without the necessity of removing the screen.

It is customary to have the window open when a screen is used; and it is objectionable during the night or when absent from the house for a short time to leave the window open for the reason a sudden rain will be blown through the screen damaging the curtains, floors and furniture. By having the rain guard on the outside, ventilation is obtained, and at the same time, the open window is protected. By reversing and inverting the screen, a wind protector is obtained which will prevent drafts and direct the air toward the ceiling. The screen and rain shield are adjustable so as to fit different windows.

The principal object of the invention is to provide a screen unit with an attachment which may be utilized either for a rain shield or draft regulator.

Another object is to provide a screen unit with an attachment in the form of a draft regulator and rain shield, both adjustable, and detachable from each other.

Still another object is to provide an attachment for screens which may be used both as a rain shield and ventilator and which is quickly combined with a standard screen.

Other objects will be disclosed in the specification and claims forming a part of this application.

In the drawings:

Figure 1 is a perspective of the exterior of a window showing the attachment as a rain shield;

Figure 2 is a perspective of the interior of a window showing the attachment as a draft regulator;

Figure 3 is a vertical section taken on the line 3—3 of Figure 1;

Figure 4 is a detailed perspective of a modified form;

Figure 5 is a detailed perspective of the modified form;

Figure 6 is a horizontal section taken on the line 6—6 of Figure 4;

Figure 7 is a perspective of a second modified form showing the fold in perspective; and

Figure 8 is a vertical section through a screen with the ventilator in place; and

Figure 9 is a fragmentary horizontal section

through the screen ventilator and one side of the window frame.

Referring to the drawings, in which similar parts are designated by like numerals:

Numeral 8 designates a window frame in which is placed an adjustable screen of the usual construction having overlapping halves 10 and 11 slidable in contact with each other. The screen 9 may take different forms without departing from the invention, but is illustrated as adjustable because of the ready adaptability to different size windows and the problem presented in connection with the attachment. Numeral 12 designates the attachment, preferably made of metal or other material which may be either bent, molded, or easily formed into the desired shape.

Attachment 12 in the preferred form illustrated in Figures 1, 2, 3, consists of a front face 13 having halves 14 and 15 corresponding to halves 10 and 11 of the screen 9, with each half 14 and 15 slidably mounted on each other, half 14 having turned edges 16 at the top and bottom to slidably receive the half 15, the halves 14 and 15 each having side members 17, the sides 17 having flanges 18 at right angles to the sides 17, and tabs 19 adapted to slide under straps 20 on the face of the screen frames 21. The sides 17 and front face 13 are flared outwardly from the screen from a line 22 spaced from the upper edges 23 of the two halves 14 and 15.

The top edge 24 of the half 14 is formed by bending the top edge 24 upon itself, with a turned down lip 25, with the turned-over portion forming a channel 26 to receive the top edge 23 of the half 15. Hangers 27 are secured to the top edge 24 of half 14 and extend down over the rear of channel 26 to receive the top edge of the screen 9, and thus in cooperation with the straps 20 and tabs 19 securely hold the attachment in position on the screen.

In the modified form shown in Figures 4, 5, and 6, the structure is substantially the same, except that instead of the tabs 19 and straps 20 and hangers 27, the flanges 18 are extended to comprise sockets 28 having sides 29 and back members 30 to receive the screen 9. The hangers 27 are eliminated and the top edge 24 is formed by severing the back member 30 adjacent the end to a point along the top edge and folding material upon itself in the manner shown in the preferred form.

As actually used, the attachment 12 will be secured to the screen 9, either as shown in preferred form as illustrated by Figures 1, 2, 3, or as modified in Figures 4, 5, and 6 and placed

in the window. The screen and attachment being adjusted to fit the window frame as is customary.

If it is desired to use the attachment as a rain shield, the attachment will be on the outside, as shown in Figure 1. If it is desired to use the attachment as a ventilator, as illustrated in Figure 2, it is only necessary to invert the screen from the position shown in Figure 1 to that of Figure 2. Obviously, too, various materials may be used instead of metal, such as galvanized iron or tin which can be easily cut and shaped; translucent material of various shades which is moldable can be used; and the same results can be obtained by making the front face of the attachment out of glass and secured in the side members.

If it is desired to use the screen without the attachment, it can be readily removed, as illustrated and described.

In the second modified form, as illustrated in Figures 7 and 8, the tabs 19, straps 20 and hangers 27 are eliminated, flanges 18 having side members 29 without the back members 30, the side members 29 fitting over the edges of the screen 9 and into the usual recesses in which the window slides. The top edge 24 remains the same without folding the material back upon itself, as illustrated in Figure 4. Thus the second modified form may be placed over the screen, the top edge 24 being over the longitudinal edge of the screen and held in position by contact with the window when used as a rain shield with the side flanges 29 extending over the short sides of the screen and being held in the recess of the window frame.

When used as a ventilator, the inside of edge 24 will be placed beneath the bottom of the screen, the metal attachment extended on the inside of the window and the side members 29 will extend around the side edges of the screen

into the recesses of the window frame. Thus it is not necessary to remove the screen in transforming the metal member from a rain shield to a ventilator, nor is it necessary to have any attachments or locking means on the screen member itself.

Numerous variations may doubtless be devised by persons skilled in the art without departing from the principles of my invention. I, therefore, desire no limitations to be imposed on my invention, except such as are indicated in the appended claims.

What I claim is:

1. A combined ventilator and shield comprising front members slidably mounted one on the other, sides extending inwardly from said members and at substantial right angles to said front members, flanges extending oppositely from said sides and other side pieces extending from said flanges substantially parallel to the first mentioned sides, said flanges and pieces adapted to receive a screen in the angle therebetween and fit into recesses in a window frame, the front pieces flaring outwardly from said flanges and a flange extending inwardly from the innermost edge of the front members.

2. A reversible ventilator and shield unit adapted to be used on the inside or outside of a screen comprising front members slidably mounted one on the other side members, extending inwardly from said front members and at substantial right angles to said front members, a top flange extending inwardly, side flanges extending from the side members said side members and flanges adapted to fit over the face and sides of a screen and enter recesses in a window frame, the ventilator and shield adapted to be held in frictional engagement in the recesses by the screen, the front members flaring outwardly from the side flanges.

JOSEPH J. KURTZ.