


March 14, 1944.

G. HEITZMAN

2,343,865

GARMENT HANGER

Filed May 12, 1942

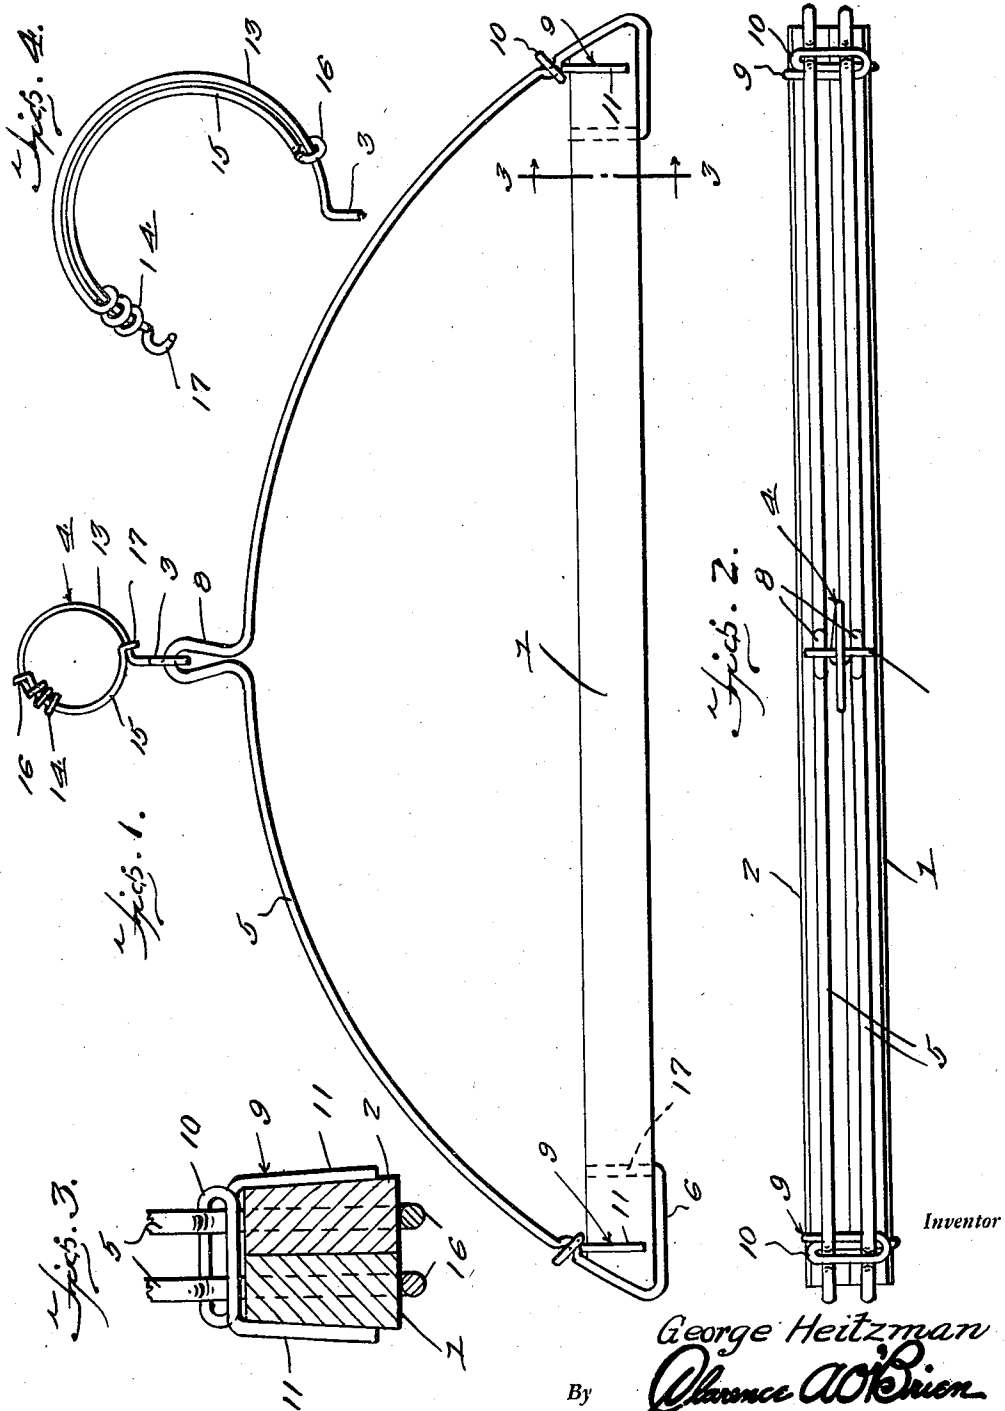

By

George Heitzman
Clarence A. O'Brien
and Harvey B. Jacobson Attorneys

Inventor

UNITED STATES PATENT OFFICE

2,343,865

GARMENT HANGER

George Heitzman, Shamokin, Pa., assignor of one-half to Willard K. Burd, Shamokin, Pa.

Application May 12, 1942, Serial No. 442,675

1 Claim. (Cl. 223—91)

My invention relates to improvements in garment hangers, the principal object in view being to provide a simply constructed device of the character indicated adapted for quickly and easily clamping garments therein, and for sliding attachment to a clothesline, or the like, and locking thereto against accidental detachment therefrom.

Another object is to provide a garment hanger with a suspension device adapted to be locked around a clothesline or the like and which is convertible into an open hook when desired.

Other and subordinate objects are also comprehended by my invention, all of which, together with the precise nature of my improvements, will be readily understood when the succeeding description and claim are read with reference to the drawing accompanying and forming part of this specification.

In said drawing:

Figure 1 is a view in side elevation of my improved garment hanger in its preferred embodiment,

Figure 2 is a view in top plan,

Figure 3 is a view in transverse section taken on the line 3—3 of Figure 1 and drawn to an enlarged scale, and

Figure 4 is a view in side elevation of the hanger hook opened.

Referring to the drawing by numerals, my improved garment hanger comprises a pair of clamping bars 1, 2, substantially rectangular transversely, and suspended from an eyelet-like terminal 3 of a suspension hook 4, by means of a pair of wire-like rods 5 each arching from the ends of one of said bars over the same and having hook-like ends 6 bent around the ends of said bars 1, 2 under the bottom edges thereof and extended, as at 7, through said bars, each rod 5, midway of its ends, being formed into a loop 8 passing through the eyelet terminal 3 of the suspension hook 4, whereby said bars 1, 2 and rods 5 are swiveled on said hook for clamping of said bars together side by side and with the rods 5 opposed side by side in slightly spaced relation.

A pair of clamping keepers are provided for clamping the bars 1, 2 together each comprising a U-shaped resilient clip 9 bent upon itself to form an elongated loop 10 embracing the rods 5 and slidable along the same toward and from one end of the bars 1, 2, each clip further comprising a pair of legs 11 adapted to straddle the outer sides of said bars 1, 2. The outer sides of the bars 1, 2 diverge, relatively, from the top edges there-

of so that the legs 11 may be wedged down over said sides to frictionally interlock therewith and tension said bars 1, 2 toward clamping relation. The rods 5 are formed adjacent the ends of the bars 1, 2 with a pair of laterally opposed bends forming notches 12 in which the loops 10 may be located for interlocking with said rods 5 against sliding movement along the same.

As will now be clear, garments interposed between the clamping bars 1, 2 may be clamped therebetween by sliding the clips 9 along the rods 5, seating the loops 10 in the notches 12, and forcing the legs 11 of the clips down over said bars 1, 2. As best shown in Figures 2 and 3, the loops 10 are sufficiently long to permit the requisite separative, opening movement of the rods 5 and bars 1, 2.

The suspension hook 4 comprises a segment 13 having at one end the eyelet terminal 3 and terminating at its opposite end in a convolute coil 14, said hook further comprising an arcuate clasp section 15 having an eyelet end 16 slidable on the segment 13, the other end of the clasp section 15 being slidably extended through the coil 14 and terminating outwardly of said coil in a catch hook 17, the arrangement being such that the clasp section 15 may be slid forwardly along the segment 13 through the coil 14 to close the hook in which position of the section 15 catch hook 16 may be hooked around the segment 13 behind the eyelet terminal 3. As will be apparent, the clasp section 15 may be slid to open the hook by moving the same in the opposite direction.

When the suspension hook 4 is closed, in the manner described, around a clothesline, the hanger is locked on the line so that it cannot become accidentally detached. However, when said suspension hook 4 is opened, said hook may be used in the usual manner.

A feature of my invention is that the coil 14 is axially offset from the axis of movement of the eyelet end 16 so that when the clasp section 15 is closed it cannot rotate on the segment 13 but must be sprung laterally to hook the catch hook 16 around the segment 13 whereby said clasp section is yieldingly held in clamping position.

The foregoing will, it is believed, suffice to impart a clear understanding of my invention without further explanation.

Manifestly, the invention, as described, is susceptible of modification without departing from the inventive concept, and right is herein reserved to such modifications as fall within the scope of the appended claim.

What I claim is:

A garment hanger comprising a pair of clamping bars, a hanger hook, means connecting said bars to said hook for swinging movement thereon into side-by-side clamping relation comprising a pair of bowed rods having the ends thereof connected to the ends of said bars, respectively, said rods arching from said bars, side by side and be-

ing provided adjacent the ends thereof with notch forming bends overlying said bars, and means to clamp said bars together comprising a pair of clip-like keepers of resilient wire having loops freely slidable on said rods into said notches to depend therefrom and legs on said keepers for yieldingly straddling said bars.

GEORGE HEITZMAN.