


Aug. 19, 1952

J. J. PETRO ET AL
PUNCHBOARD GAME DEVICE

2,607,593

Filed April 11, 1949

3 Sheets-Sheet 1

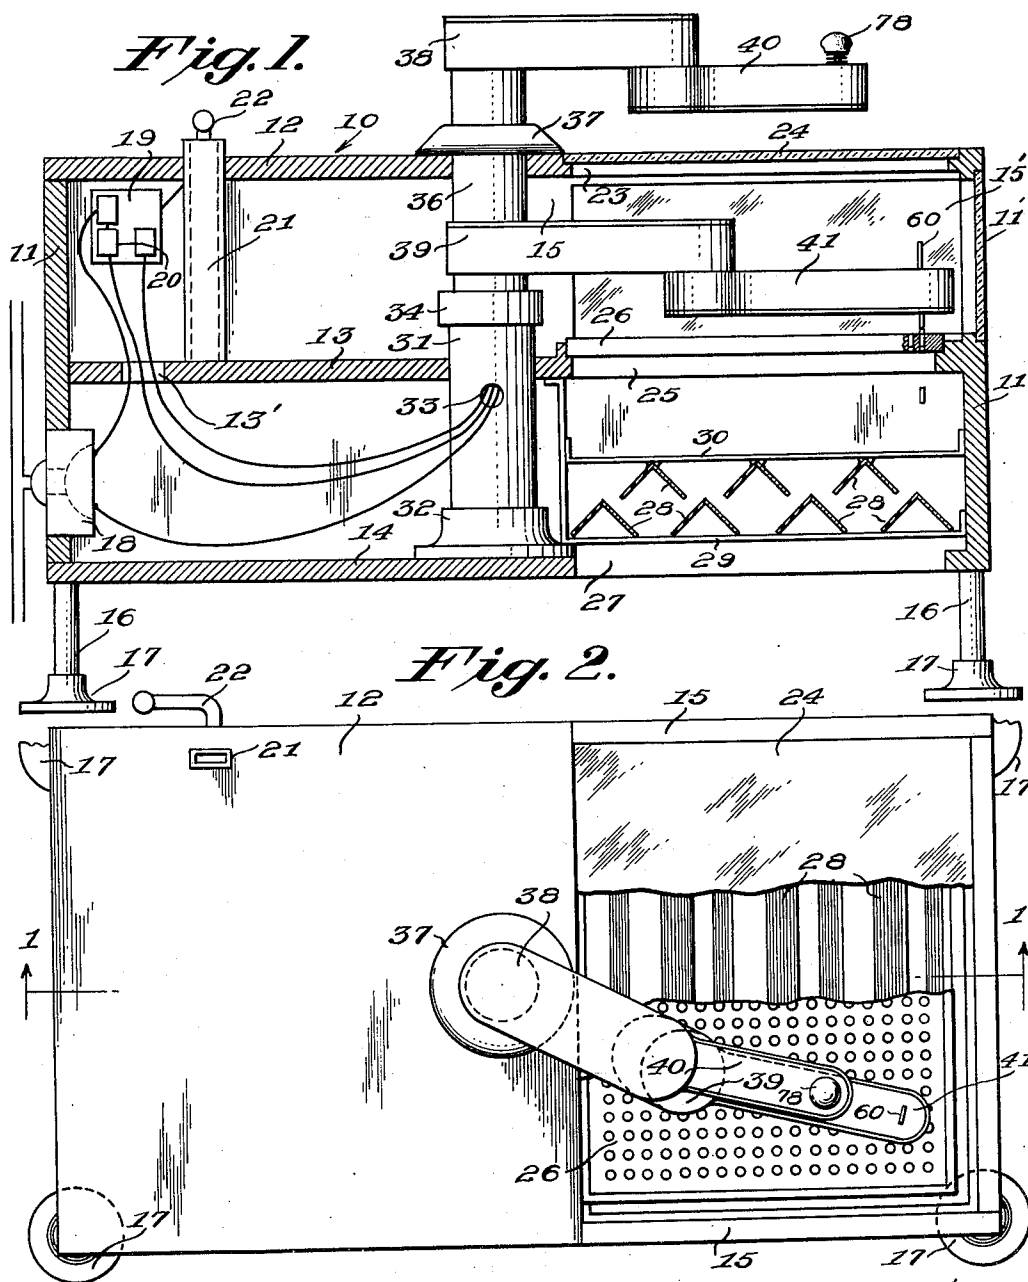

Inventors
Joseph J. Petro
Michael A. Mattis.
By *Robert J. Hewitt*
Attorney.




Aug. 19, 1952

J. J. PETRO ET AL
PUNCHBOARD GAME DEVICE

2,607,593

Filed April 11, 1949

3 Sheets-Sheet 2

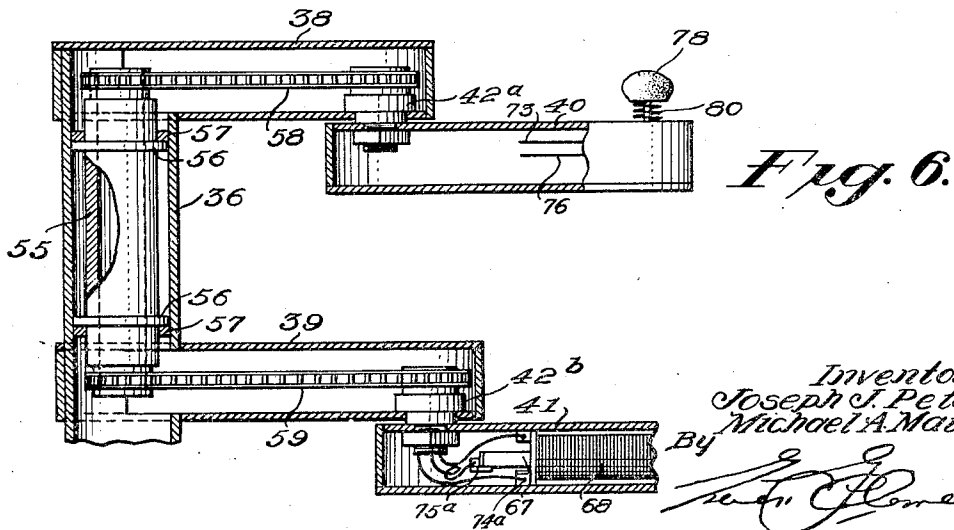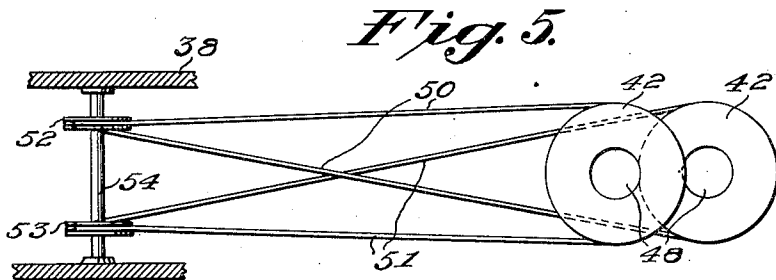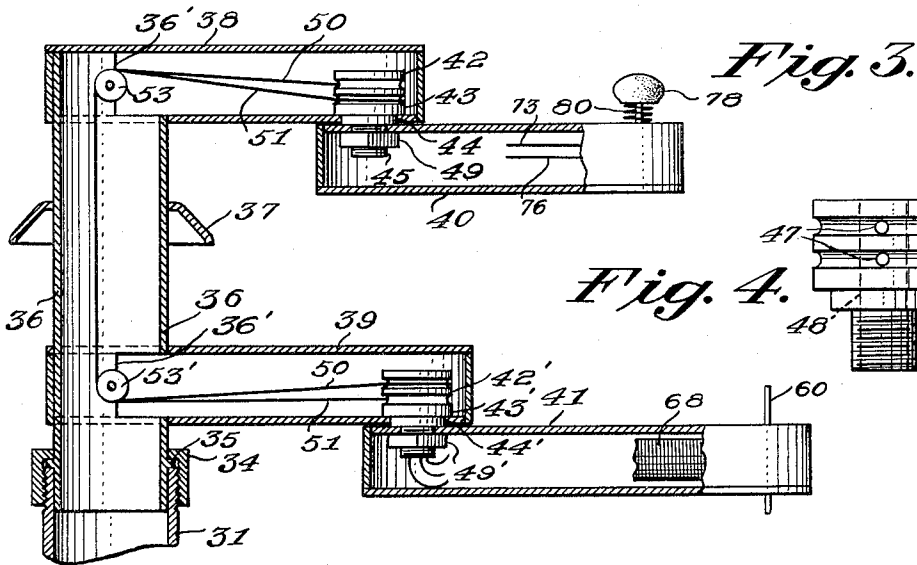

Inventors
Joseph J. Petro
Michael A. Matti

By *[Signature]*
Attorney


Aug. 19, 1952

J. J. PETRO ET AL
PUNCHBOARD GAME DEVICE

2,607,593

Filed April 11, 1949

3 Sheets-Sheet 3

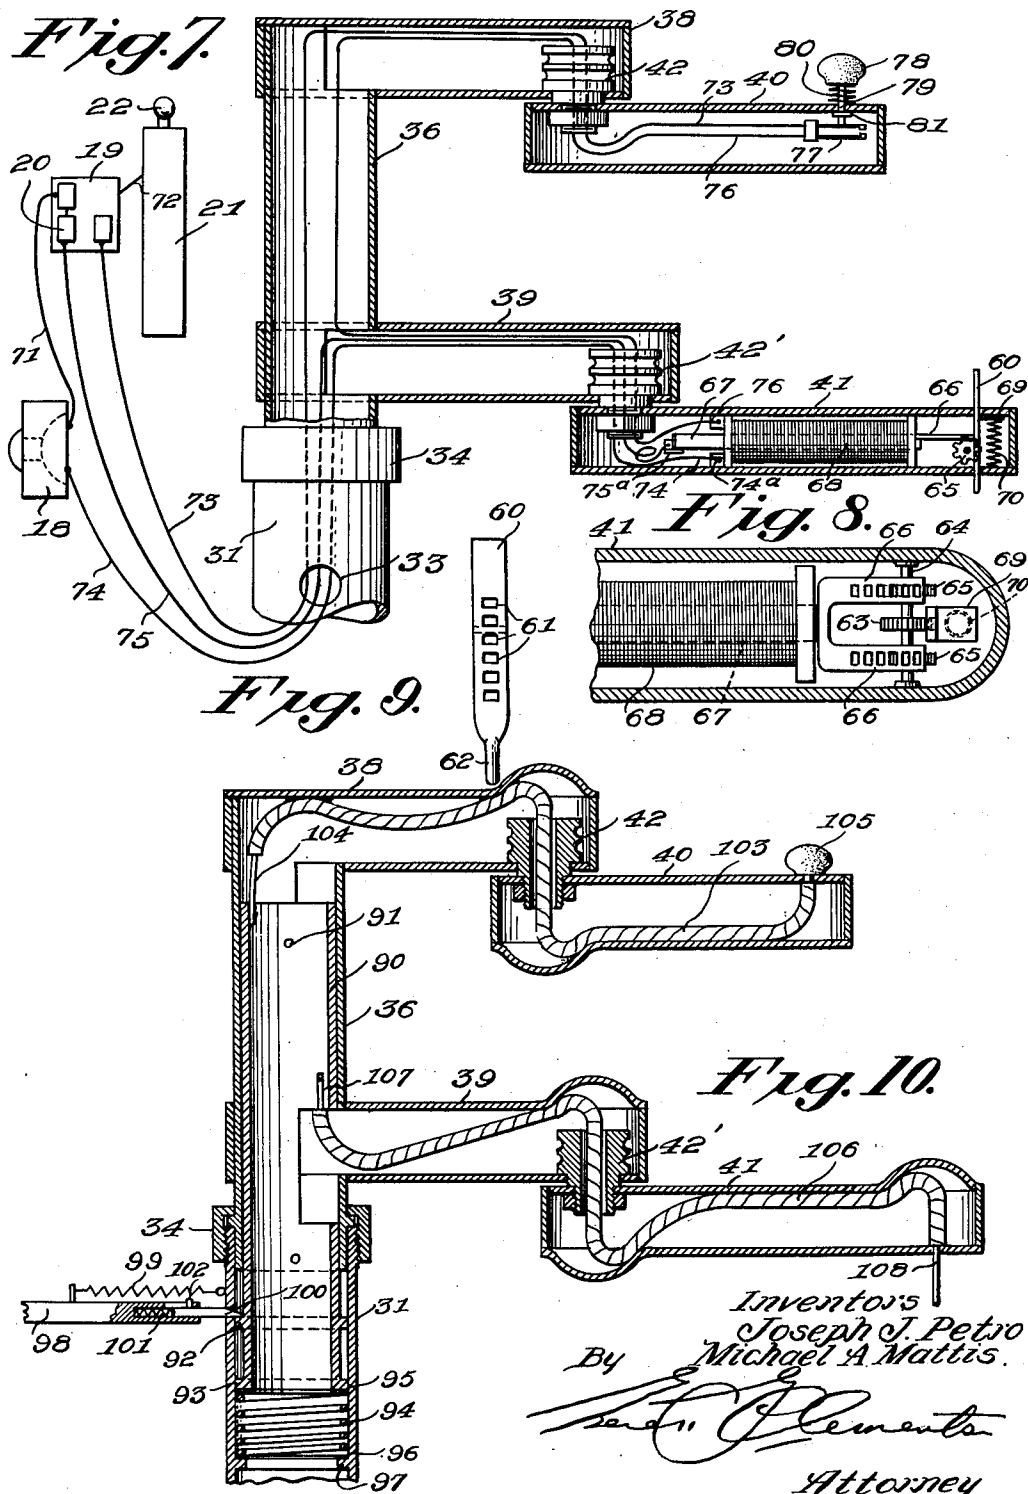

UNITED STATES PATENT OFFICE

2,607,593

PUNCHBOARD GAME DEVICE

Joseph J. Petro, Keiser, and Michael A. Mattis,
Shamokin, Pa.

Application April 11, 1949, Serial No. 86,634

14 Claims. (Cl. 273-139)

1

This invention relates to a game device and is concerned more particularly with a coin or check controlled, manually operable punch board, game device.

A primary object of the invention is to provide such a device wherein a game board is disposed within a cabinet structure beneath a transparent cover thereof and a punch mechanism is also enclosed within the cabinet wherein it is capable of being moved to any selected point above the board through manually operable connections which are accessible exteriorly of the cabinet and preferably above the cover thereof.

A further object of the invention is the provision of a punch board device wherein a punch board is disposed within a cabinet and is fully visible through a transparent cover plate in the cabinet, a punch member which is movably supported by a swingable arm, also disposed within the cabinet, and having operating connections, including a vertical cylindrical member extending through and above the cabinet and terminating in an operating arm disposed above the cabinet, for manual movement of the swingable arm, and a punch means carried thereby to desired positions above the punch board; there being punch actuating means carried by and disposed within the cylindrical member and arms operable from a position on the operating arm, at the will of the operator.

A further object of the invention is to provide a punch board device which is relatively simple in construction, easy to operate and which includes punch positioning and controlling means, whereby the punch may readily be moved to any desired point above the board and then depressed into the board, thereby improving the operation and enhancing the chance possibilities of such devices.

Other objects and advantages of the invention will become apparent in the course of the following detailed description, taken in connection with the accompanying drawings wherein:

Fig. 1 is a longitudinal vertical sectional view of the improved game device, the section being taken substantially in the plane of line I—I on Fig. 3.

Fig. 2 is a top plan view of the device with portions broken away to disclose otherwise concealed structure.

Fig. 3 is a vertical sectional view on an enlarged scale disclosing a preferred construction of upper and lower relatively movable arms which are in turn jointly movable about a vertical axis and which constitute a dominant feature of the improved game device.

2

Fig. 4 is an enlarged elevational view of an improved pivot and operating member embodied in the invention.

Fig. 5 is an enlarged top plan view of mechanism shown in Fig. 3 for imparting movement to a lower arm upon manual movement of a corresponding upper arm.

Fig. 6 is a view similar to Fig. 3 but disclosing a modified structure for operatively connecting corresponding upper and lower arms for like movement in horizontal planes.

Fig. 7 is a view corresponding to Fig. 3 but without the operating mechanism thereof and disclosing a preferred punch actuating mechanism and associated electrical connections, which for sake of clarity of disclosure, is only partially shown in Fig. 3.

Fig. 8 is a fragmental enlarged horizontal sectional view of the punch carrying arm, in Fig. 7.

Fig. 9 is an enlarged elevational view of the punch element.

Fig. 10 is a view corresponding to Fig. 7 but disclosing a direct mechanically operable punch mechanism.

Referring now in detail to the drawings, the improved device is disclosed as embodying a cabinet 10 which includes vertical end walls 11 and 11', top, intermediate, and bottom walls 12, 13 and 14 respectively, and opposite side walls 15 and 15'. The cabinet is supported by vertical legs 16 adjacent the corners thereof and which legs terminate in suitable supporting feet 17.

The cabinet is provided with an electrical socket 18 in one end wall 11 thereof and between walls 13 and 14.

The cabinet is further provided with a switch 19 including a switch closing electromagnet 20, an associated coin receptacle 21 and also a manually operable lever 22, all of which will be later referred to.

The horizontal walls 12, 13 and 14 extend substantially one half the length of the cabinet as is shown in Fig. 1, thereby providing relatively large vertically aligned rectangular openings 23, 25 and 27, in the vertically spaced walls 12, 13 and 14.

The opening 23 like the side wall portions 11' and 15' is closed by a glass plate 24 for rendering the interior of the cabinet at this end visible between the walls 12 and 13. A punch board 26 is removably disposed over the opening 25, and the function of the opening 27 is to permit the punchings to drop to an exposed position beneath the cabinet.

In order to prevent tampering with the interior of the punch board by access thereto through the

3

opening 27, guard or grating means are provided between the punch board 26 and the opening 27 and such means in a preferred embodiment thereof comprise two horizontal staggered rows of substantially right angled bars 28 which extend transversely of the cabinet with their crests directed upwardly and the bars of the upper row are disposed midway between the bars of the lower row, thereby preventing hand access to the punch board 26. The punchings however may drop down between the sloping walls of the bars 28 and be discharged between the spaced edges of the upper and lower bars.

The spaced bars 28 of the grating may be suitably supported adjacent their opposite ends by brackets 29 and 30 so as to substantially fill the opening 27 and obstruct access therethrough from the bottom of the cabinet.

A vertically disposed fixed cylindrical support 31 is positioned substantially centrally of the cabinet 10, that is, equal distance from the side as well as the end walls 15 and 14 respectively and such support extends upwardly from the bottom wall 14 through the intermediate horizontal wall 13 where it terminates a short distance thereabove. This cylindrical support is rigidly mounted on the bottom wall 14 by means of an annular flanged base member 32 and at a point slightly below the wall 13 is provided with an aperture 33 in its cylindrical wall for a purpose later referred to.

The upper end portion of the fixed support 31 is exteriorly threaded to receive a flanged retaining nut 34 for loosely engaging and retaining a circumferential flange 35 formed on the lower end portion of a second vertical cylindrical member 36, for rotation of the member 36, about its axis upon the upper end of the fixed support 31. The member 36 is further provided with a dished bearing or collar plate 37 intermediate its ends which rests upon the top wall 12 of the cabinet and in which the upper portion of the device is rotatably supported while the lower end of the member 36 is telescoped within the upper end of support 31. The flanged nut 34 prevents vertical withdrawal of member 36 from the support 31 while providing a bearing for that end portion.

The rotatably supported member 36 is provided with upper and lower radially projecting arms 38 and 39 respectively, which arms are suitably rigidly secured to the member 36 for unitary rotation therewith. As is indicated at 36' in Fig. 3, the cylindrical wall of the member 36 is cut away to provide parts communicating with the interior of the hollow arms 38' and 39'.

A pair of supplemental arms 40, 41 have corresponding ends thereof disposed below and pivotally connected to and carried by the outer ends of the arms 38 and 39 respectively, whereby such arms may have pivotal movement relative to the arms 38 and 39, while at the same time they are bodily movable about the axis of the cylindrical supporting member 36 with the arms 38 and 39.

As will be seen from the sectional view in Fig. 1, the upper pivotally connected arms 38 and 40 are disposed above the top of the cabinet while the lower pivotally connected arms 39 and 41 are disposed within the cabinet and between the glass cover plate 24 and the punch board 26 above which the punch carrying arm 41 is movable in a manner later described.

The arms 40, 41 are pivotally connected to the respective arms 38, 39 by means of tubular pulley-like pivot members 42, 42' which are rigid

4

with the arms 40 and 41 and are rotatably mounted within the hollow arms 38, 39. Each pulley-like pivot member 42-42' is identical in construction and one thereof is more clearly shown in Fig. 4.

As indicated above each member 42, and 42' includes a generally cylindrical body having annually reduced lower bearing portions 43 and 44. These bearing portions are of smaller diameter than the upper pulley-like portions, whereby the former rests adjacent its periphery upon the lower wall of the arm 38 or 39 and the latter of which is rotatably supported in an aperture in such wall of the arm.

The members 42-42' further include a depending threaded tubular shank or stem 45, which projects through a concentric aperture in the upper wall of connecting arm 40 or 41, and a nut 49 or 49' engages such threaded stem and binds said upper wall between the portion 44 and the nut. Thus the pivot members 42, 42' are rigidly secured to the respective arms 40, 41 while same are rotatably mounted in the lower walls of the hollow arms 38 and 39, and within which the body portions 42-42' of the pivot members are disposed.

These pulley-like members 42, 42' are each provided with a pair of vertically spaced cable receiving grooves 46 and a cable anchoring aperture 47 is provided in each groove. The pivot members are each provided with a relatively large axial aperture 48 for a purpose later referred to.

The arm 41 is adapted for pivotal movement relative to arm 39 through the pivotal movement of arm 40 relative to arm 38 with the arms 40, 41 swinging in the same direction and to the same angular extents. For this operation two cables 50 and 51 are provided, see Fig. 2, whose upper free ends are secured within apertures 47 in the upper and lower grooves 46 respectively. The cables extend rearwardly from the pivot member 42 over upper pulleys 52, 53; thence downward over lower pulleys 52' and 53', from the latter of which the cables extend outwardly through arm 39 and into the grooves 46' of the lower pivot member 42'. The free ends of the cables are here secured in apertures 47 in the same manner described above. The grooves 46 and the apertures 47 are best shown in Fig. 4.

It is to be noted that the upper and lower ends of the cables extend to opposite sides of the respective pivot members, whereby upon manually turning the arm 40 relative to the arm 38 that the upper end of one cable 50 or 51 will wind upon the pivot member 42 and its opposite end will wind off the lower member 42'. The opposite will occur with the other cable as will be seen from a comparison of Figs. 3 and 5.

It will of course be understood that the end portions of the cables are wound in the grooves 46 which for sake of clarity is not shown in all figures on the drawings.

In Fig. 6 is disclosed a modified embodiment of the connections between the pivot members and wherein the pivot members 42^a and 42^b are modified to the extent that same are provided with sprocket wheels instead of the grooves 46.

A cooperating cylindrical member 55 is rotatably disposed within the cylindrical member 36 by means of circumferential bearing flanges 56 on the member 55 and cooperating retaining rings 57 suitably secured within opposite end portions of the member 36.

The member 55 is provided at its opposite ends with sprocket wheels aligned with those on the members 42^a and 42^b and sprocket chains 58 and

5

59 disposed within the hollow arms 38 and 39 respectively are operatively engaged with the aligned sprocket wheels on the pivot members and member 55.

A punch member 60 is disposed adjacent the free end of the lower supplemental arm 41 and this member preferably comprises an elongated flat bar having spaced gear teeth, engaging apertures 61 formed therealong. The bar is further formed at its lower end into a cylindrical punch element 62 as shown in Fig. 9.

The punch bar 60 is guidingly supported in vertically aligned openings in the upper and lower walls of the arm 41 as indicated in Fig. 7 and is normally retained at its upper inoperative position.

The apertured bar 60 cooperates with a gear 63 supported centrally of the arm on a rotatable shaft 64 suitably journaled in the opposite side walls of the arm.

Another gear 65 is secured to the shaft 64 at each side of the centrally disposed gear 63, and these gears 65 cooperate with a pair of apertured arms 66 mounted on the forward end of the reciprocable core member 67 of an electro-magnet 68. This punch operating assembly is supported within the arm 41, intermediate its pivotal connection with arm 39 and its outer free end. The punch bar 60 is preferably provided with a right angularly disposed stop member 69, which in the upper and inoperative position of the punch engages the inner upper wall of the arm and which is normally retained in such position by means of a coil spring 70, disposed between such member 69 and the inner bottom wall of the arm.

The electro-magnet 68 within the arm 41 is adapted for energization through coin control of an electric circuit therefor and which circuit is further and manually controlled from the upper exposed supplemental arm 40 as shown in Figs. 1 and 7.

Accordingly, a conductor 71 extends from a line socket 18 to switch block 19, which in turn is provided with an extension 72 engageable by the coin controlled lever 22 for closing of the switch 19. A conductor 73 extends from the switch 19, through an opening 13' in the wall 13, thence through the support aperture 33 and upwardly through member 36. The conductor 73 then extends laterally through arm 38, downwardly through the central opening 48 in pivot member 42 and thence again laterally within arm 40 where it is connected with one contact arm of a normally open manual switch 77. The other arm of said switch is connected by a conductor 76 paralleling the conductor 73 through arms 40, 38 and member 36 but which extends laterally within arm 39, downwardly through pivot member 42' and is terminally connected to the electro-magnet 68.

A conductor 74 extends from socket 18, through aperture 33, arm 39 and pivot member 42' and has its opposite end connected to the electro-magnet 68. A further conductor 75 extends from the electro-magnet 20 in the switch 19 and has its opposite end connected to the end of core 67 opposite the end thereof to which gear engaging arms 66 are connected.

Contact members 74^a and 75^a are provided at the points of connection of conductors 74 and 75 with the electro-magnet 68 and its movable core 67, respectively.

At this point it is to be noted that the gear actuating arms 66 and contact member 75^a are suitably insulated from the core 67.

6

The arm 40 is provided with a hand knob 78 having a stem 79 extending through the upper wall of the arm and the knob is urged upwardly by means of a coil spring 80 disposed between same and the arm 40. The stem 79 of the knob 78 has a flange 81 engaging the lower face of the top wall of the arm to limit upward movement of the knob and stem and the stem engages the upper arm of the normally open switch as is shown in Fig. 7.

A modified embodiment of the punch actuating means is shown in Fig. 10 and which means is wholly mechanical in contra-distinction to the electrically controlled and actuated means in Figs. 1, 7 and 8.

The modified means comprises a tubular sleeve 90 supported within the member 36 for limited movement axially thereof but which is preferably connected for movement with the member 36 about its axis. Such connection may embody a key and slot connection parallel with said axis or one or more small pins 91 carried by the wall of the sleeve 90 and extending into vertical slots in the wall of member 36.

The sleeve 90 is provided with a circumferential flange 92 adjacent its lower end and slightly below the corresponding end of the rotatably mounted member 36 and a second circumferential flange 93 is provided at the lower end of the sleeve in spaced relation to the flange 92.

A coil spring 94 is disposed within the stationary support 31 and has its opposite ends engaged with bearing washers 95 and 96 which respectively engage flange 93 and a circumferential flange 97 on the inner wall of the support 31.

The purpose of the spring 94 is to normally urge the sleeve upwardly within member 36 in preparation for a punching operation but the sleeve is normally retained in a lowered inoperative position of the parts as indicated in Fig. 10 with the spring 94 slightly compressed by means of a coin controlled sleeve locking and releasing bar 98.

The bar 98 extends into proximity to the coin controlled operating lever 22 and is normally urged toward the support 31 by means of a relatively light coil spring 99 having one thereof connected to the bar and the other end connected to the support.

A latch 100 is reciprocally supported in a bore in the end of the bar 98 and has its free end bevelled off and which end is slidably disposed in an aperture in the wall of support 31.

A coil spring 101 slightly stronger than spring 99 is disposed in said bore and bears against the rear end of latch 100 for permitting movement thereof relative to the bar, for a purpose later referred to. The latch is further provided with a pin 102 extending into a slot in the bar for limiting said movement of the latch while preventing same from moving entirely out of the bore.

A generally stiff but somewhat flexible tubular guide member 103 is disposed within the upper arms 38 and 40 and which intermediate its ends extends freely through the pivot member 42. The guide member 103 may be suitably connected to the arms at desired points in its length and a Bowden wire 104 extends through the guide member and has one end thereof extending downwardly below the corresponding end of the member and is suitably secured to the sleeve 90 adjacent its upper end. The opposite end of the wire extends through an aperture in the upper

wall of arm 40 and has a hand-manipulating knob 105 attached thereto. The adjacent end of the tubular member may preferably be secured to the lower face of the said upper wall.

A similar tubular guide member 106 is disposed within the lower pivotally connected arms 39 and 41 and in which is slidably disposed a wire 107 which has one end thereof extending upwardly from the corresponding end of the member and is suitably secured to the sleeve 90. The opposite end of the wire extends through an aperture in the lower wall of the arm 41 and adjacent its free end and such end of the wire provides a punch 108.

The apparatus is shown in Fig. 10 in its normal inoperative position wherein the knob 105 is shown depressed and resting against the top wall of arm 40 and with the punch 108 in fully projected position from the lower wall of the arm 41.

It is to be here noted that in this position of the parts the punch also extends into the board as indicated by dotted lines in Fig. 1 and consequently the arms cannot be rotated about the axis of the arm supporting member 36. This is contrary to the form of Fig. 1, however wherein the arms may be swung at will to position the punch at any desired point above the board without first inserting a coin.

The apparatus being in the normal position of Fig. 10, when it is desired to play a coin is inserted in the receptacle 21 thereby releasing the lever 22 for manual actuation thereof. As the lever 22 is connected with bar 98 for moving same away from the support 31 a distance sufficient to withdraw the latch 100 from engagement with the upper shoulder on flange 92, the spring 94 will thereafter move the sleeve 90 upwardly which will result in similar movement of the wires 104 and 107. At this time the knob 105 will also be moved upwardly from the upper wall of arm 40 and the punch 108 will be drawn upwardly into the arm and above the board. In this position of parts the arms may be swung to any desired position for placing the punch at a selected point on the board.

Also in this position of parts the flange 92 will have engaged the lower end of member 36 and the latch will be in yieldable engagement with the outer wall of sleeve 90 between the flanges 92 and 93 thereon. When the punch has been manually moved to a desired playing position, through actuation of the arm 40, as above described, downward pressure is then exerted on the knob 105 which will force the wire 104 and the connected sleeve 90 downwardly in the cylindrical support 36. At this time the downward movement of the sleeve 90 will in turn move the wire 107 into the tubular guide member 106 to project the punch 108 downwardly through the board from the free end of the arm 41.

Upon completion of this downward movement of the sleeve 90 the bevelled end on the latch 100 will cause same to cam over the flange 92 after which it will assume its latched position shown in Fig. 10, with the parts in normal non-playing position.

The structure as above described provides a novel game device wherein both the punch board and the punch are confined within a cabinet while both thereof are visible from a playing position through the glass cover plate 24.

By the provision of the upper and lower main arms 38 and 39 and the corresponding upper and lower supplemental arms 40 and 41, the punch 60 may be moved to any position over the

surface of the punch board 26. This is possible, due to the upper and lower main arms 38 and 39 being jointly swingable about the vertical axis of member 36, together with the provision for swinging movement of the upper and lower supplemental arms 40 and 41 relative to the respective main arms to which they are pivotally connected. Therefore, as shown in Fig. 2, the main arms 38 and 39 have been swung to a position wherein their longitudinal axes are at a substantial angle to the opposite sides of the cabinet with their outer ends disposed adjacent the inner lower corner of the punch board. Further, the supplemental arms have been swung slightly toward the opposite side of the cabinet, whereby the punch 60 is disposed adjacent the lower right corner of the punch board.

Thus by jointly swinging the arms 38 and 39 about the axis of member 36 and by the judicious swinging of the supplemental arms 40 and 41 relative to the main arms 38 and 39. The punch 60 may be positioned at substantially any point over the punch board 26.

The arm 40 may be readily manipulated through the medium of the knob 78 upon pressure thereon in a plane parallel to the arm and the arms are capable of being swung without the necessity of depositing a coin in the receptacle 21. However the punch cannot be actuated to enter a cell on the board, until a coin is deposited and the lever 22 is released for closing of the switch 19. With switch 19 closed however, the punch still will not operate until downward pressure is exerted on the knob 78 whose stem 79 will then move the upper switch arm toward the lower switch arm and thereby effect the closing of switch 77.

When this switch 77 has also been closed the electro-magnet 68 becomes energized through the circuit including conductors 73, 76, electro-magnet 68, conductors 74 and switch 19. The electro-magnet thus being energized causes the core 67 to move toward the right as viewed in Fig. 7 resulting in movement of the apertured arms 66 over the corresponding gears 65 with a consequent rotation of shaft 64. This rotating of shaft will cause rotation of gear 63 whose teeth engage within the apertures 61 in the punch bar 60 and by which the punch will be moved downwardly through the punch board as indicated in dotted lines in Fig. 1.

Upon completion of this punching operation, the contacts 74^a and 75^a will come into engagement, thereby closing a circuit through the solenoid 20 through conductors 74, 75 and 71 which will effect opening of the switch 19, whereupon the spring 70 will return the punch bar and core to their normal inoperative positions.

While I have disclosed my invention in accordance with certain specific structural embodiments thereof, such are to be considered as illustrative only and not restrictive, the scope of the invention being defined in the subjoined claims.

What I claim and desire to secure by U. S. Letters Patent is:

1. In a game device, a cabinet having a transparent wall, a punch board supported within the cabinet and visible through said wall, a punch mechanism pivotally supported within the cabinet and including an articulated punch carrying arm movable relative to the punch board within the cabinet, an extension on said arm projecting through and beyond a wall, a second articulated arm carried on said extension outside of the cabinet, flexible means interconnecting said arms for

synchronous swinging movement thereof, and means supported by said arms for operating said punch.

2. In a game device, a cabinet having a top wall including a transparent panel, a punch board removably supported within the cabinet below said transparent panel, a vertically disposed tubular member rotatably supported within the cabinet and projecting above said top wall, a hollow arm rigid with and projecting radially from said tubular member in said cabinet and above said punch board, a second hollow arm rigid with and projecting radially from said tubular member and disposed above said top wall, a supplemental hollow arm within said cabinet and pivotally connected to said first arm, a second supplemental hollow arm pivotally connected to said second arm, a punch movably supported by the first supplemental arm, said hollow arms and tubular member being in communication, drive means in said tubular member and said arms rigid therewith, said drive means being connected to said supplemental arms for synchronous movement thereof, and punch operating means extending through said arms and tubular member and connected with said punch.

3. The structure according to claim 2, wherein said drive means comprises flexible members operatively engaged with members rigid with said supplemental arms and which provide said pivotal connections.

4. The structure according to claim 2, together with a guard disposed below said punch board and including overlapping angular bars providing spaces therebetween to permit punchings to pass therethrough while precluding hand access to said punch board.

5. The structure according to claim 2, wherein said punch operating means comprises an electro-magnet in said first supplemental arm, and including a core, and rack and gear connections between the core and said punch.

6. The structure according to claim 2 wherein said punch operating means comprises a tubular sleeve rotatable with and vertically slidable in said tubular member, and a pair of elongated flexible members connected at adjacent ends to said sleeve, the other end of one of said flexible members connected with said punch and a knob on the other end of the other flexible member and disposed above the top wall of said second supplemental arm.

7. In a game device, a cabinet having a top wall including a transparent panel, a punch board disposed in said cabinet beneath said panel, a vertically disposed tubular member rotatably supported in said cabinet adjacent one edge of said panel and said punch board, and projecting above said top wall, a hollow arm rigid with and communicating with said tubular member and projecting radially therefrom at a position intermediate said panel and said punch board, a second hollow arm rigid with and communicating with said tubular member and projecting radially therefrom at its upper projecting end and in parallelism with said first arm, a supplemental hollow arm having one end thereof communicating with and pivotally connected to the adjacent end of said first arm, a second supplemental hollow arm having one end thereof communicating with and pivotally connected to the adjacent end of said second arm, interconnecting means between said supplemental arms and disposed in said first and second arms and said tubular member for synchronous pivotal movement of the

supplemental arms on said first and second arms, a punch movably supported by the first supplemental arm adjacent its free end, and punch operating means extending through said tubular member and all of said arms and including control means carried by the second supplemental arm adjacent its free end.

8. The structure according to claim 7 wherein said pivotal connections each comprises a generally cylindrical member rigidly connected to the corresponding supplemental arm and pivotally engaging the corresponding rigid arm and said members having axial openings providing said communication between the rigid and supplemental arms.

9. The structure according to claim 7 wherein said interconnecting means comprises a pair of cables extending through said tubular member and having their opposite ends secured to said pivotal connections at diametrically spaced points from their axes with one end of one cable secured to one pivotal connection at one side of its axis and the other end thereof secured to the other pivotal connection at the opposite side of its axis and the ends of the other cable secured to said pivotal connections on the sides of their axes opposite to the ends of the first cable.

10. The structure according to claim 7 wherein said interconnecting means comprises a vertically disposed cylindrical member rotatably supported within said tubular member, a sprocket chain operatively engaged with a sprocket wheel on one end of the cylindrical member and a sprocket wheel on one of said pivotal connections and a second sprocket chain operatively engaged with a sprocket wheel on the other end of said cylindrical member and a sprocket wheel on the other pivotal connection.

11. The structure according to claim 7, wherein said punch operating means comprises an electro-magnet disposed in the first supplemental arm, rack and gear connections between the core of said magnet and said punch, a knob controlled switch in said second supplemental arm and conductors between said switch and said electro-magnet.

12. The structure according to claim 7, wherein said punch operating means comprises a cylindrical sleeve supported within said tubular member for vertical movement therein, a flexible punch operating member extending through the first rigid and supplemental arms and having its opposite ends connected to said sleeve and said punch, a second flexible member extending through the second rigid and supplemental arms, said second flexible member having one end thereof connected to said sleeve and the opposite end of the flexible member extending through the top wall of the second supplemental arm and provided with an operating knob.

13. In a game device, a cabinet including a top wall, a punch board within the cabinet beneath said wall, a tubular member rotatably supported in the cabinet and projecting above said wall, a pair of horizontal hollow arms rigidly supported by said tubular member communicating therewith and projecting radially therefrom, one of said arms extending above the board and the other arm extending above said top wall, a second arm pivotally connected at one end thereof on a vertical axis to each of said first arms adjacent their free ends, a punch carried by the second arm above the board adjacent its free end, punch operating means carried by the first and second arms operable by means of a knob on the

11

second arm above the top wall, said knob providing for swinging of the respective second arm about its pivotal connection, and flexible means within the tubular member and said first arms connected with the second arms at said pivotal connections for synchronous swinging movement thereof.

14. In a game device, a cabinet including a top wall, a punch board supported in the cabinet below and parallel with said wall, a hollow generally U-shaped member rotatably supported in the cabinet and comprising an upper arm above said top wall and a parallel lower arm above said board, a member pivotally supported by each of said arms adjacent its free end; a supplemental arm rigidly secured to each of said members adjacent one end thereof, drive connections between said members for synchronous swinging movement of said supplemental arms about the axes of said members, a punch carried by the free end of the lower supplemental arm, punch op-

12

erating means supported by said first and supplemental arms and including a knob adjacent the free end of the upper supplemental arm, which knob provides for manual swinging movement of the upper supplemental arm about the axis of the corresponding pivot member.

JOSEPH J. PETRO.
MICHAEL A. MATTIS.

REFERENCES CITED

The following references are of record in the file of this patent:

UNITED STATES PATENTS

Number	Name	Date
2,062,144	Perry	Nov. 24, 1938
2,314,743	Walters	Mar. 23, 1943

FOREIGN PATENTS

Number	Country	Date
782,937	France	Mar. 25, 1935