


DIFFUINO – COMPLETE BCD INPUT AND CONTROL CIRCUIT

Hardware validity: VALID = NOT [BCD3 AND (BCD2 OR BCD1)]

1. BCD SELECTOR, INPUT FILTERS, AND VISIBLE BIT INDICATORS

5. LOCAL SUPPLY DECOUPLING

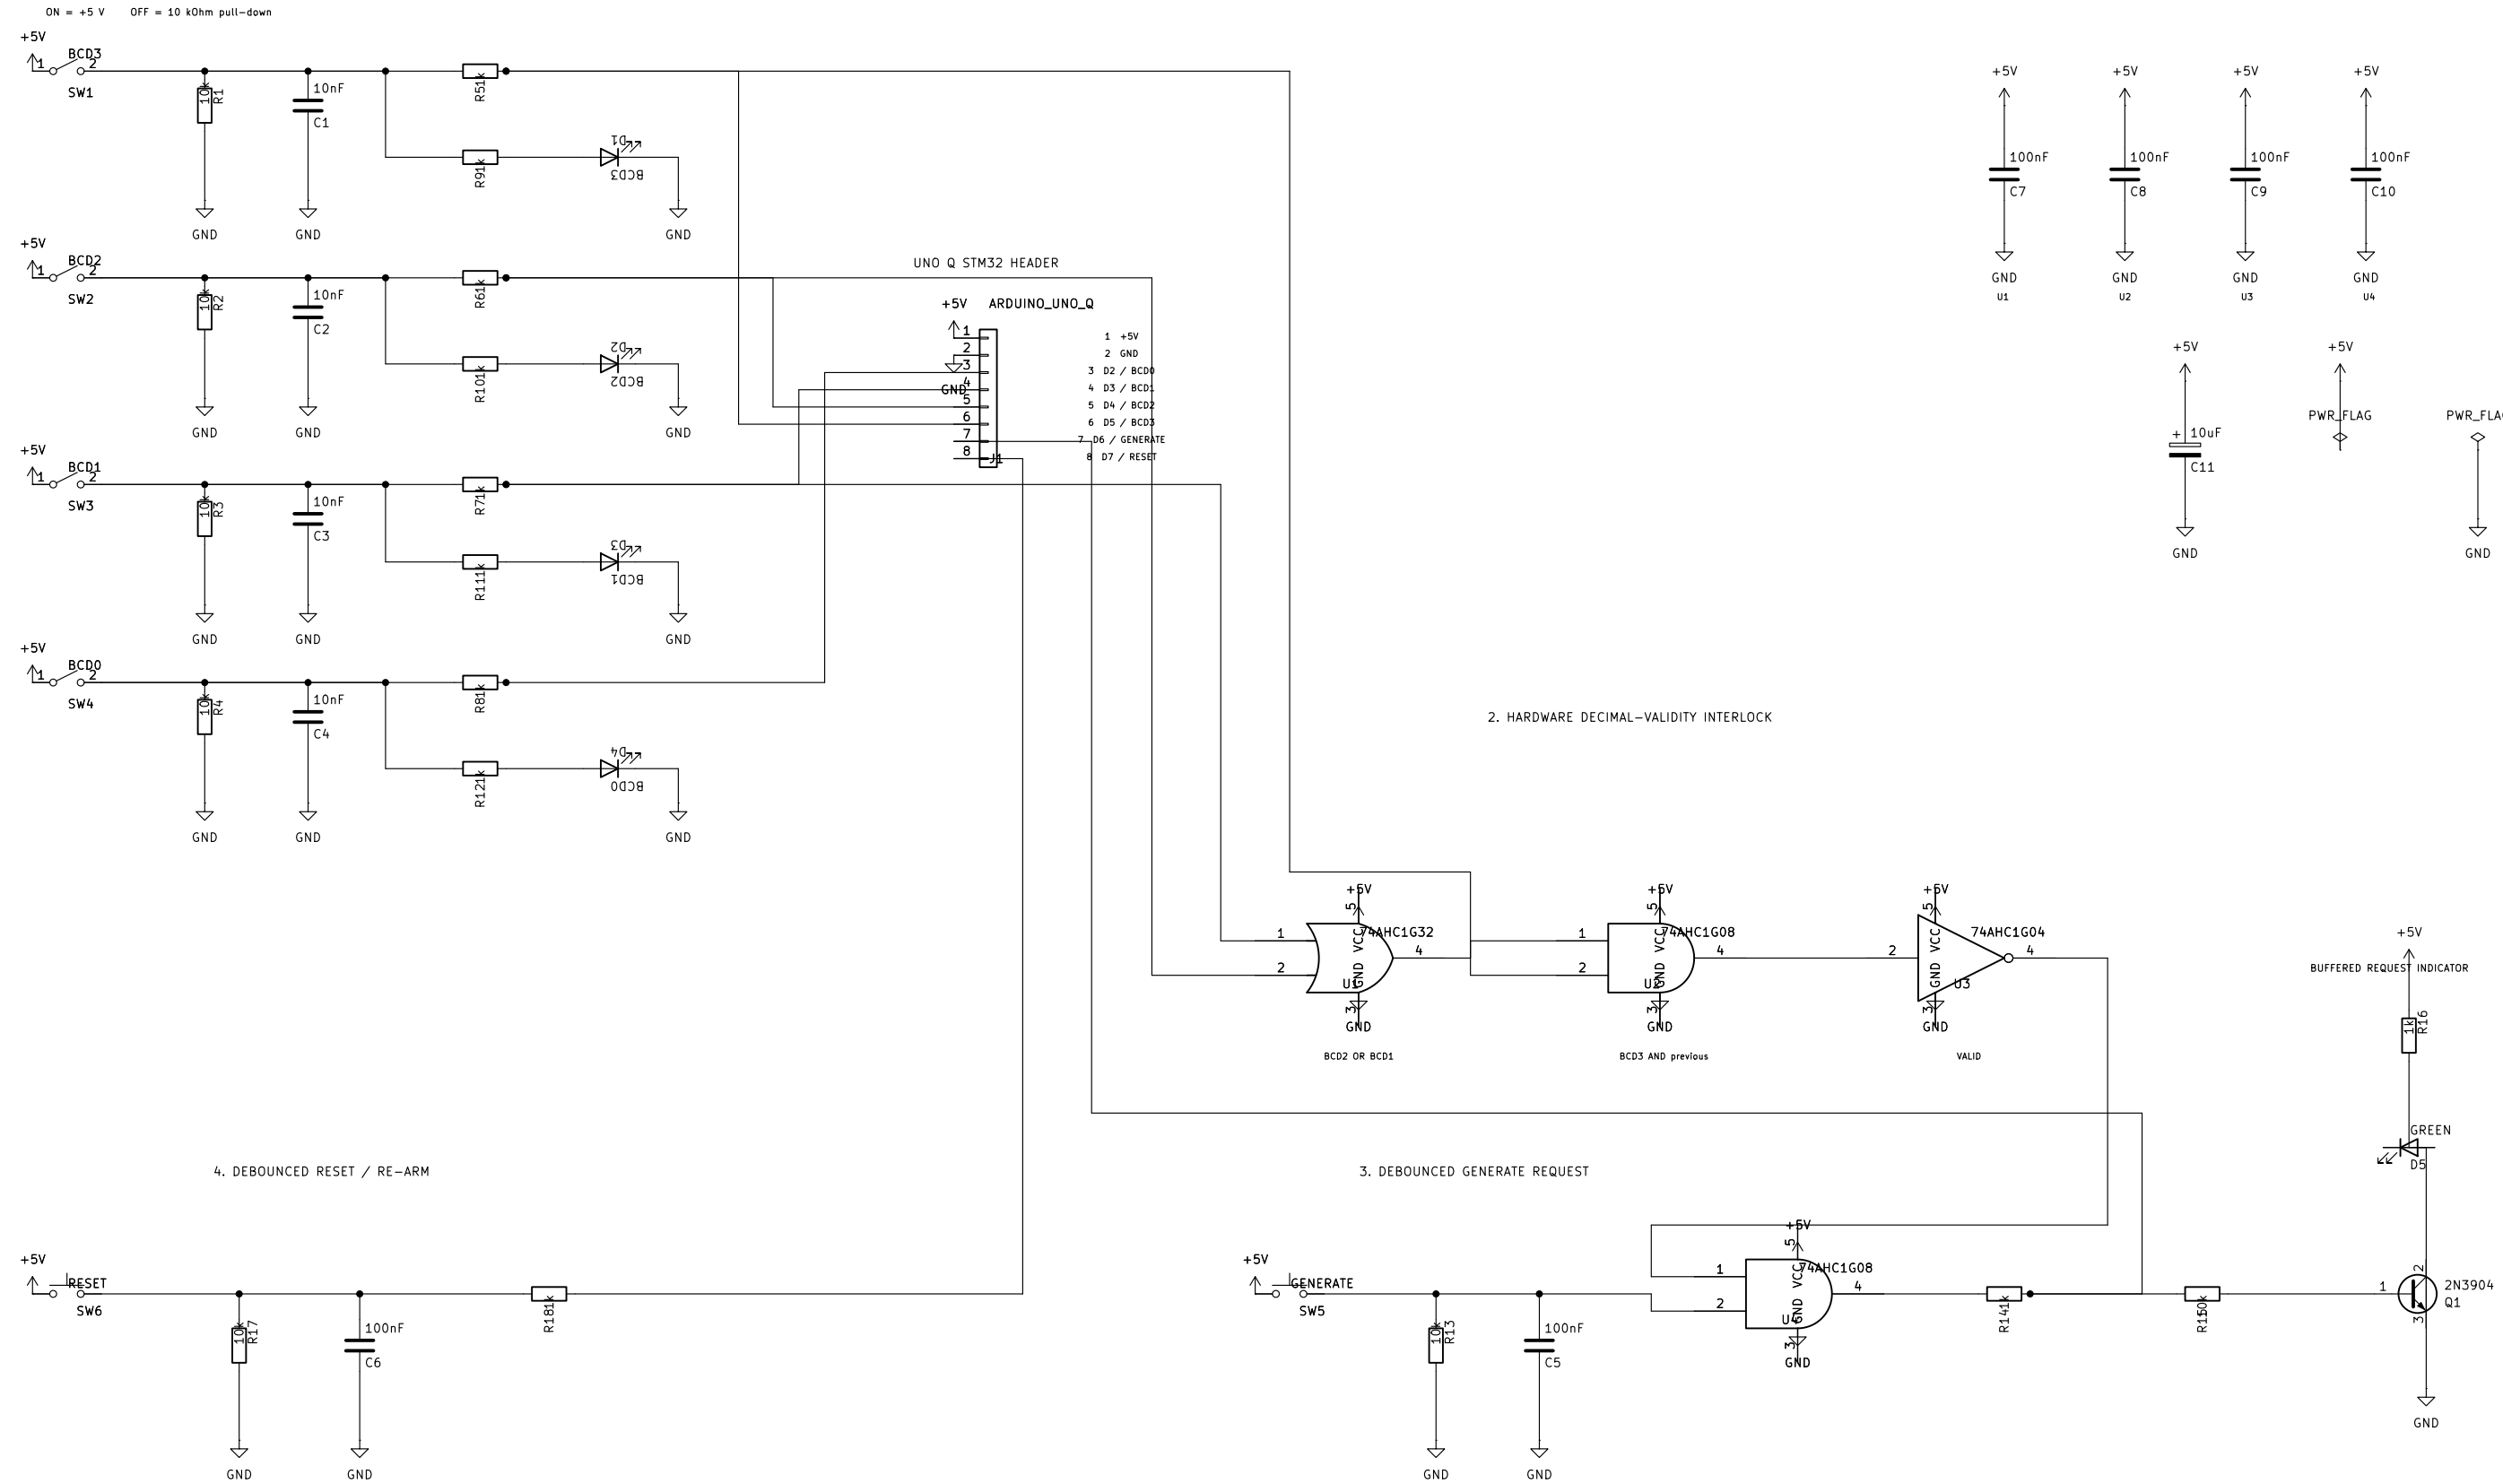

Firmware: 40 ms debounce; BCD is latched for inference; D6 is ignored while busy; D7 restores the ready smiley.

D2–D7 are the UNO Q's 5 V-tolerant STM32 header inputs. Never connect this circuit to the 1.8 V MPU GPIO.