



















DIFFUINO — 4-BIT BCD SELECTOR, VALIDITY GATE, AND RESET

$$\text{VALID} = \text{NOT}(\text{BCD3 AND (BCD2 OR BCD1)}); \text{ D6} = \text{GENERATE AND VALID}$$



Arduino UNO Q interface
UNO_Q




BCD input and indication




BCD validity interlock (values 10-15 cannot trigger inference)

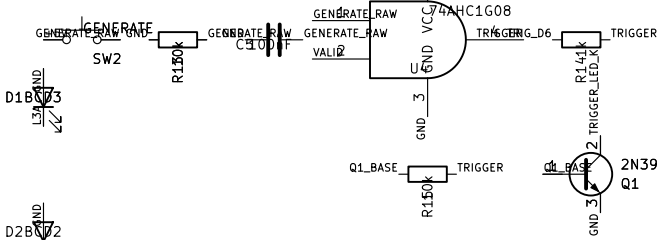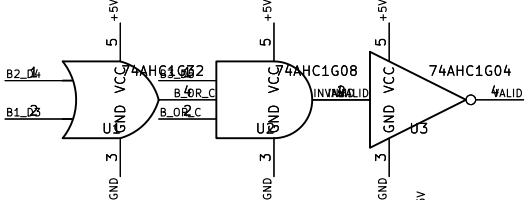

Reset / re-arm

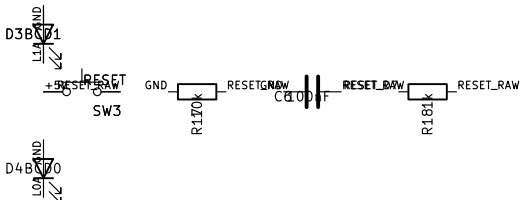

er filtering — place each 100 nF capacitor beside its IC



0 ms debounce, ignores D6 while sampling, and latches the result until D7 reset.

STM32 digital header shown here; do not connect these 5 V nets to 1.8 V MPU GPIO.