



FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)PCBA, SEE SPEC.md		SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT

CELL VOLUME 4.1 WH (9.2 CM3) AT 0.45 WH/CM3. THICKNESS 5.20 ON THE PHONE BACK.

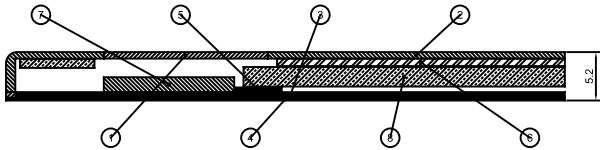

DETAIL C (SECTION A-A, BOTTOM 60 MM)


SCALE 3:1

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN. CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
CARD - IPHONE-18-PRO			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-IPHONE-18-PRO-CARD-100			SIZE A3
SCALE 1:1	MASS (EST.) 50 G (TI) / 62 G (BRASS)	SHEET 1 OF 18	REV A

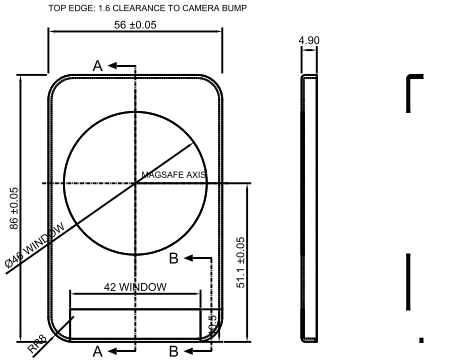

FRONT (OUTER FACE)

RIGHT


SECTION A-A



BOTTOM



SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
CARD - IPHONE-18-PRO		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-IPHONE-18-PRO-CARD-101		SIZE A3
SCALE 1:1	MASS (EST.) 12.2 G TI / 23.6 G BRASS	SHEET 2 OF 18
		REV A

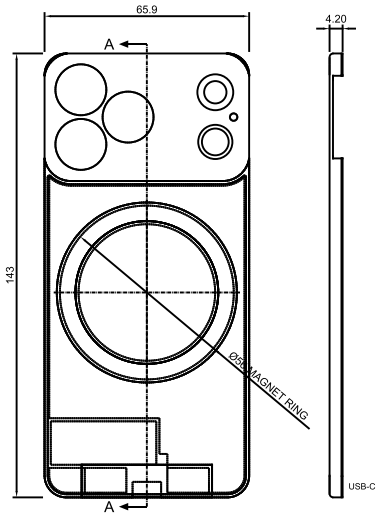


FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 4.4 WH (9.8 CM3) AT 0.45 WH/CM3. THICKNESS 4.20 ON THE PHONE BACK.



DETAIL C (SECTION A-A, BOTTOM 60 MM)
SCALE 3:1


PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN, CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
FILL - IPHONE-18-PRO			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-IPHONE-18-PRO-FILL-100			SIZE A3
SCALE 1:1	MASS (EST.) 69 G (TI) / 95 G (BRASS)	SHEET 3 OF 18	REV A

CAMERA PLATE 1.1 THK OVER PLATEAU, FACE LEVEL WITH LENS RINGS. SENSOR OPENINGS 0.6 CLEARANCE, FLASH/LIDAR DRAFTED PER STEP

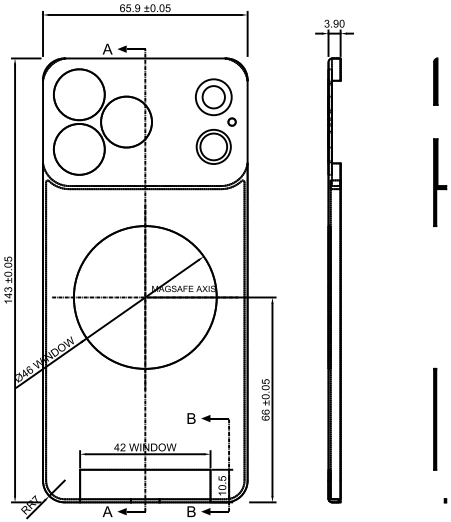

FRONT (OUTER FACE)


RIGHT

SECTION A-A




USB-C OPENING 9.2 x 3.0, CENTRED, R0.5 CORNERS

BOTTOM



PHONE SIDE (BASE PLATE ITEM 3 BONDS HERE)

SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE	
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA		
FILL - IPHONE-18-PRO			
PART KHENSU SHELL - HOUSING			
DRAWING NUMBER KS-IPHONE-18-PRO-FILL-101			SIZE A3
SCALE 1:1	MASS (EST.) 27.4 G TI / 52.7 G BRASS	SHEET 4 OF 18	REV A

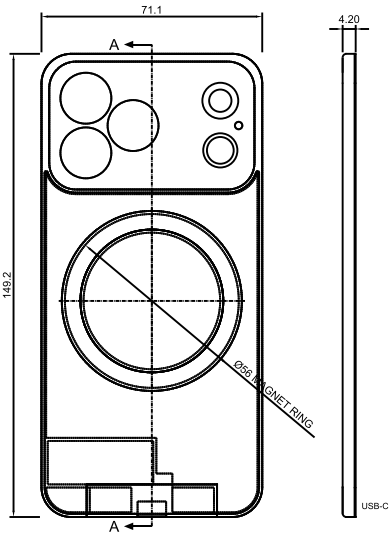


FRONT, INTERNALS HIDDEN

RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 5.3 WH (11.7 CM3) AT 0.45 WH/CM3. THICKNESS 4.20 ON THE PHONE BACK.



DETAIL C (SECTION A-A, BOTTOM 60 MM)
SCALE 3:1


PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL SEE PARTS LIST	FINISH SEE -101	
WRAP - IPHONE-18-PRO		
PART KHENSU SHELL - ASSEMBLY		
DRAWING NUMBER KS-IPHONE-18-PRO-WRAP-100		SIZE A3
SCALE 1:1	MASS (EST.) 83 G (TI) / 117 G (BRASS)	SHEET 5 OF 18	REV A

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN, CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

CAMERA PLATE 1.1 THK OVER PLATEAU, FACE LEVEL WITH LENS RINGS. SENSOR OPENINGS 0.6 CLEARANCE, FLASH/LIDAR DRAFTED PER STEP

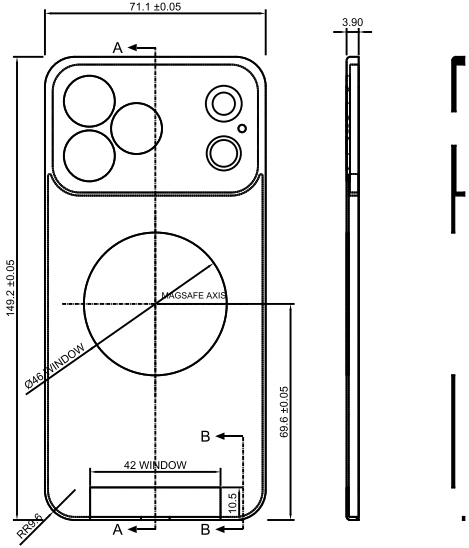

FRONT (OUTER FACE)

RIGHT

SECTION A-A




USB-C OPENING 9.2 x 3.0, CENTRED, R0.5 CORNERS

BOTTOM



PHONE SIDE (BASE PLATE ITEM 3 BONDS HERE)

SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
WRAP - IPHONE-18-PRO		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-IPHONE-18-PRO-WRAP-101		SIZE A3
SCALE 1:1	MASS (EST.) 36.0 G TI / 69.3 G BRASS	SHEET 6 OF 18
		REV A

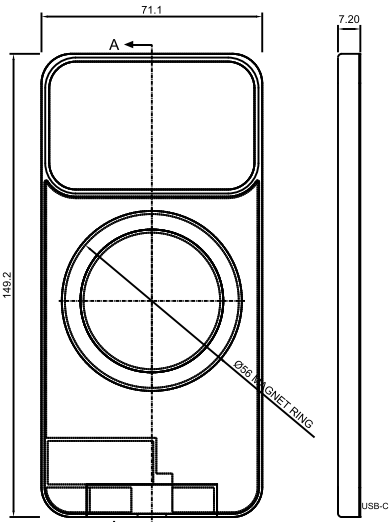


FRONT, INTERNALS HIDDEN

RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 13.2 WH (29.4 CM3) AT 0.45 WH/CM3. THICKNESS 7.20 ON THE PHONE BACK.

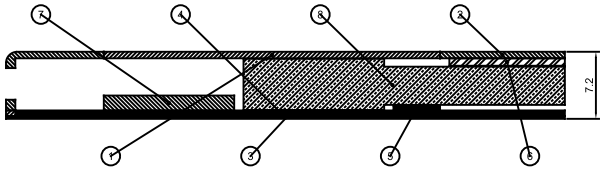

DETAIL C (SECTION A-A, BOTTOM 60 MM)


SCALE 5:1

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN. CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu		DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
WRAP XL - IPHONE-18-PRO			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-IPHONE-18-PRO-WRAP-XL-100			SIZE A3
SCALE 1:1	MASS (EST.) 124 G (TI) / 157 G (BRASS)	SHEET 7 OF 18	REV A

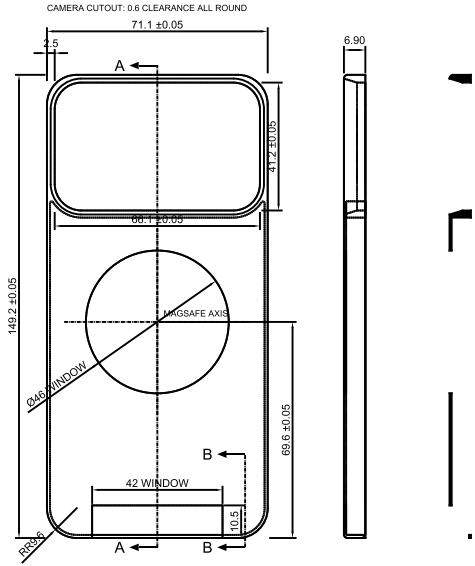


FRONT (OUTER FACE)

RIGHT


SECTION A-A



BOTTOM

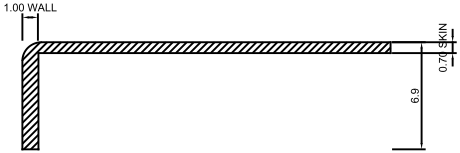

SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES


ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
WRAP XL - IPHONE-18-PRO		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-IPHONE-18-PRO-WRAP-XL-101		SIZE A3
SCALE 1:1	MASS (EST.) 35.9 G TI / 69.1 G BRASS	SHEET 8 OF 18
		REV A

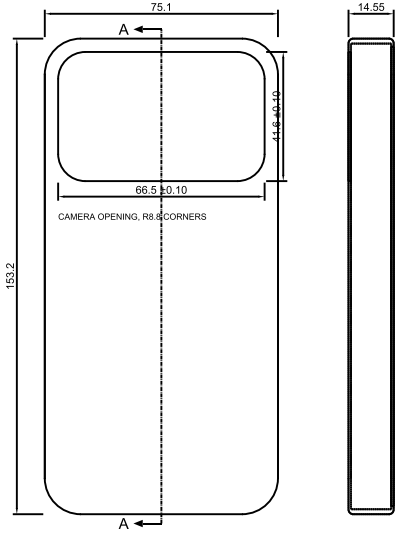

BACK

RIGHT

WALL 1.60 / FRONT LIP 1.00 / BACK SKIN 0.80



DETAIL B (SECTION A-A AT BOTTOM)
SCALE 4:1




ISOMETRIC
SCALE 3:5

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL LSR, SHORE 55A	FINISH MATTE TEXTURE (VDI 27)	
SILICONE SHOCK CASE - IPHONE-18-PRO		
PART KHENSU SHELL - CASE		
DRAWING NUMBER KS-IPHONE-18-PRO-CASE-201		SIZE A3
SCALE 1:1	MASS (EST.) 18 G	SHEET 9 OF 18
		REV A

NOTES

1. DIMENSIONS IN MM. LIQUID SILICONE RUBBER, SHORE 55A ±5. STEP MODEL GOVERNS.
2. ADD 0.5-1° DRAFT TO ALL WALLS BEFORE TOOLING; PARTING LINE AT MAX OUTLINE.
3. BUTTON COVERS, SPEAKER, MIC AND USB-C OPENINGS PER APPLE DRAWINGS FOR TARGET MODEL.
4. GENERAL TOLERANCES ±0.15; CAMERA OPENING ±0.10.
5. HOLDS PHONE WITH WRAP MODULE (KS-*-WRAP-100). DROP TEST 1.2 M TO CONCRETE, 26 DROPS.




FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)PCBA, SEE SPEC.md		SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT

CELL VOLUME 4.1 WH (9.2 CM3) AT 0.45 WH/CM3. THICKNESS 5.20 ON THE PHONE BACK.

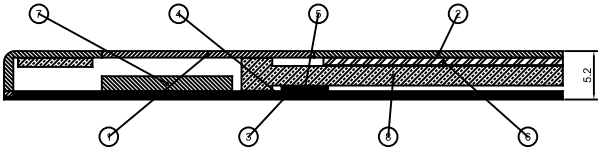

DETAIL C (SECTION A-A, BOTTOM 60 MM)


SCALE 3:1

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN, CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
CARD - ISLAND			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-ISLAND-CARD-100			SIZE A3
SCALE 1:1	MASS (EST.) 50 G (TI) / 62 G (BRASS)	SHEET 10 OF 18	REV A

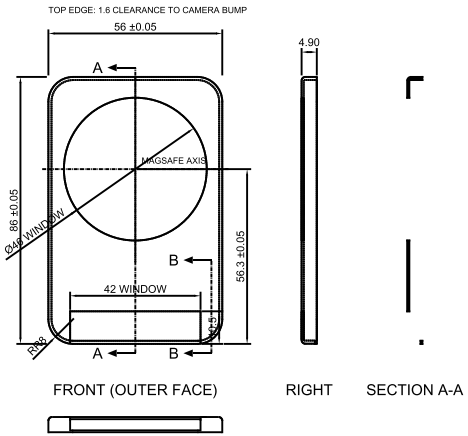


FRONT (OUTER FACE)


RIGHT

SECTION A-A

BOTTOM



SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
CARD - ISLAND		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-ISLAND-CARD-101		SIZE A3
SCALE 1:1	MASS (EST.) 12.2 G TI / 23.6 G BRASS	SHEET 11 OF 18
		REV A

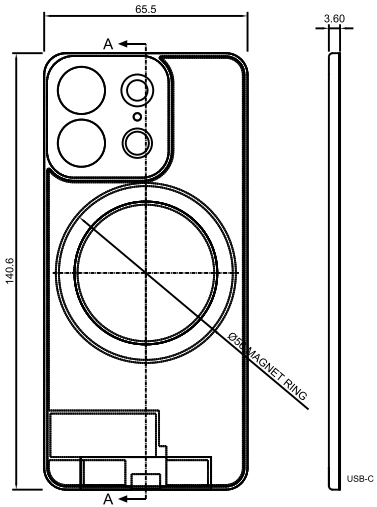


FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 3.1 WH (6.8 CM3) AT 0.45 WH/CM3. THICKNESS 3.60 ON THE PHONE BACK.



DETAIL C (SECTION A-A, BOTTOM 60 MM)
SCALE 3:1


PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES


1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN, CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
FILL - ISLAND			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-ISLAND-FILL-100			SIZE A3
SCALE 1:1	MASS (EST.) 62 G (TI) / 86 G (BRASS)	SHEET 12 OF 18	REV A

CAMERA PLATE 0.9 THK OVER PLATEAU, FACE LEVEL WITH LENS RINGS. SENSOR OPENINGS 0.6 CLEARANCE, FLASH/LIDAR DRAFTED PER STEP

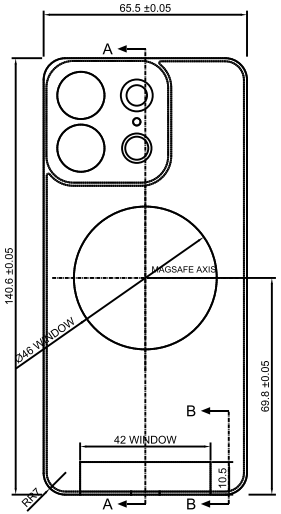

FRONT (OUTER FACE)




RIGHT

SECTION A-A




USB-C OPENING 9.2 x 2.4, CENTRED, R0.5 CORNERS

BOTTOM



PHONE SIDE (BASE PLATE ITEM 3 BONDS HERE)

SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
FILL - ISLAND		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-ISLAND-FILL-101		SIZE A3
SCALE 1:1	MASS (EST.) 26.0 G TI / 50.0 G BRASS	SHEET 13 OF 18
		REV A

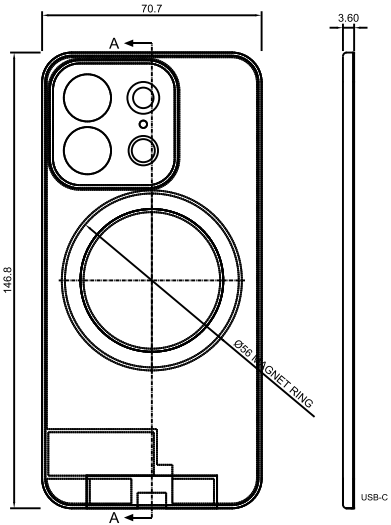


FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 3.9 WH (8.6 CM3) AT 0.45 WH/CM3. THICKNESS 3.60 ON THE PHONE BACK.



DETAIL C (SECTION A-A, BOTTOM 60 MM)
SCALE 3:1


PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN. CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
WRAP - ISLAND			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-ISLAND-WRAP-100			SIZE A3
SCALE 1:1	MASS (EST.) 72 G (TI) / 100 G (BRASS)	SHEET 14 OF 18	REV A

CAMERA PLATE 0.9 THK OVER PLATEAU, FACE LEVEL WITH LENS RINGS. SENSOR OPENINGS 0.6 CLEARANCE, FLASH/LIDAR DRAFTED PER STEP

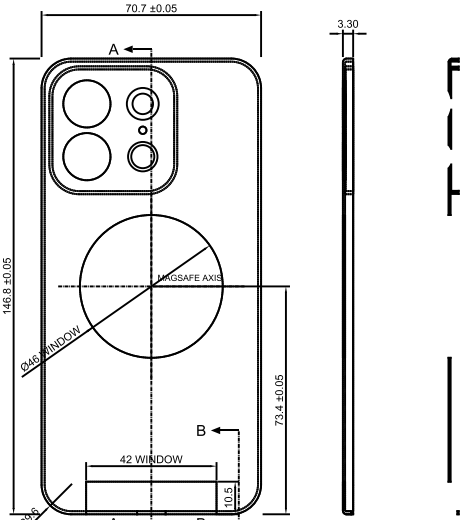

FRONT (OUTER FACE)


RIGHT

SECTION A-A




USB-C OPENING 9.2 x 2.4, CENTRED, R0.5 CORNERS

BOTTOM



PHONE SIDE (BASE PLATE ITEM 3 BONDS HERE)

SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
WRAP - ISLAND		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-ISLAND-WRAP-101		SIZE A3
SCALE 1:1	MASS (EST.) 30.4 G TI / 58.5 G BRASS	SHEET 15 OF 18
		REV A

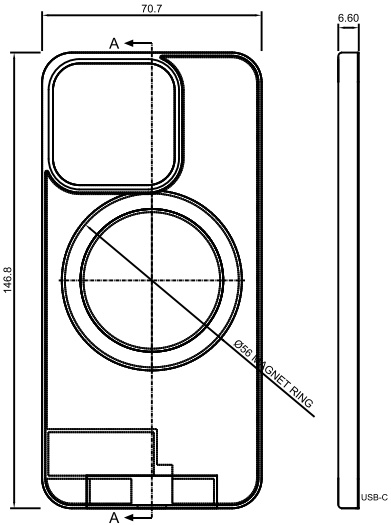


FRONT, INTERNALS HIDDEN RIGHT

PARTS LIST

ITEM	DESCRIPTION	MATERIAL / SPEC	PROCESS
1	HOUSING	TI-6AL-4V GR5 OR C26000 BRASS	CNC, SEE -101
2	RADIO / COIL WINDOWS	PC, UL94 V-0, COLOUR MATCHED	INSERT MOULD OR BOND
3	BASE PLATE 0.6	PC-GF30	MOULD OR CNC
4	MICRO-SUCTION FILM 0.3	NANO-SUCTION PU	DIE CUT
5	MAGNET RING	NDFEB N52, NI-CU-NI	BOUGHT IN
6	QI2 RECEIVER COIL + FERRITE	QI2 CERTIFIED MODULE	BOUGHT IN
7	MAIN BOARD (SOM, GUARD, HALOW, WI-FI, BLE)	PCBA, SEE SPEC.md	SMT
8	CELL PACK	LI-ION POUCH 3.85 V, CUSTOM SHAPE	BOUGHT IN
9	GRAPHITE SHEET 25 UM	PYROLYTIC GRAPHITE + PSA	DIE CUT
10	USB-C RECEPTACLE (SLIM STYLES)	USB-C 2.0, MID-MOUNT, 16 PIN	BOUGHT IN

CELL VOLUME 13.7 WH (30.4 CM3) AT 0.45 WH/CM3. THICKNESS 6.60 ON THE PHONE BACK.

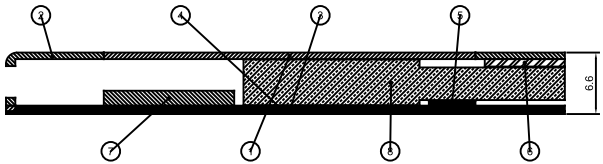

DETAIL C (SECTION A-A, BOTTOM 60 MM)


SCALE 3:1

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

NOTES

1. DIMENSIONS IN MM. SEE -101 FOR HOUSING DETAIL. STEP ASSEMBLY GOVERNS.
2. BOND ITEM 3 TO HOUSING WITH 0.1 PSA PERIMETER BEAD; ITEM 4 LAMINATED TO ITEM 3.
3. CELLS (ITEM 8) TO UN38.3 AND IEC 62133-2; PCM ON BOARD; NO CELL TOUCHES METAL.
4. ITEM 9 GRAPHITE 25 UM ACROSS INNER SKIN, CLEAR OF COIL AND ANTENNA WINDOWS.
5. MAGNET RING POLARITY AND ALIGNMENT PER MAGSAFE-COMPATIBLE ARRAY; VERIFY WITH TARGET PHONE.
6. ATTACHMENT, DROP AND THERMAL TESTS PER SPEC.md SECTION 8 BEFORE RELEASE.


ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10		THIRD ANGLE
MATERIAL SEE PARTS LIST		FINISH SEE -101	
WRAP XL - ISLAND			
PART KHENSU SHELL - ASSEMBLY			
DRAWING NUMBER KS-ISLAND-WRAP-XL-100			SIZE A3
SCALE 1:1	MASS (EST.) 129 G (TI) / 163 G (BRASS)	SHEET 16 OF 18	REV A

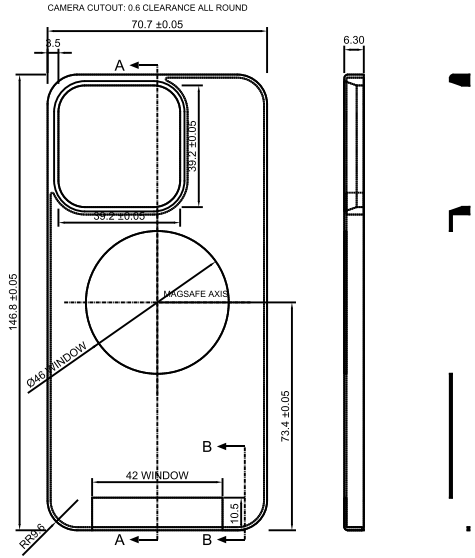


FRONT (OUTER FACE) RIGHT SECTION A-A



BOTTOM



SECTION B-B (BOTTOM EDGE)
SCALE 5:1




ISOMETRIC
SCALE 3:5

NOTES

1. DIMENSIONS IN MM. DO NOT SCALE DRAWING. STEP MODEL GOVERNS UNDIMENSIONED GEOMETRY.
2. GENERAL TOLERANCES ISO 2768-mK UNLESS NOTED. PHONE INTERFACE FEATURES ±0.05.
3. BREAK SHARP EDGES 0.1-0.2. INTERNAL CORNER RADII 0.5 MIN.
4. WINDOWS FILLED WITH ITEM 2 (PC), FLUSH TO SKIN WITHIN 0.02.
5. MASK INTERNAL SKIN FOR GRAPHITE SHEET BOND (ITEM 9). NO BURRS AT USB-C OPENING.
6. KEEP 40 MM NON-METAL ALONG BOTTOM EDGE (HALOW ANTENNA). NO METAL OVER COIL WINDOW.
7. TI: MATTE POWDER COAT 60-80 UM ON OUTER FACES ONLY; MACHINE FACE 0.07 LOW SO COATED FACE IS LEVEL WITH LENS RINGS.
8. BRASS: C26000 LEAD-FREE, NO LACQUER OR COATING ON OUTER FACES (KEEPS SURFACE ANTIMICROBIAL).

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES


ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL TI-6AL-4V GR5 OR C26000 BRASS	FINISH TI: MATTE POWDER COAT, COLOUR-MATCHED. BRASS: BEAD BLAST, BA	
WRAP XL - ISLAND		
PART KHENSU SHELL - HOUSING		
DRAWING NUMBER KS-ISLAND-WRAP-XL-101		SIZE A3
SCALE 1:1	MASS (EST.) 37.3 G TI / 71.8 G BRASS	SHEET 17 OF 18
		REV A

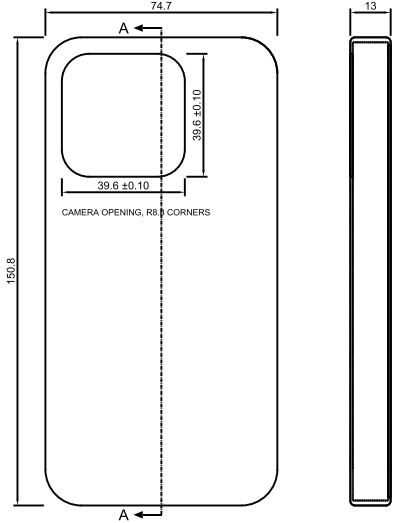


BACK

RIGHT

WALL 1.60 / FRONT LIP 1.00 / BACK SKIN 0.80



DETAIL B (SECTION A-A AT BOTTOM)
SCALE 4:1



ISOMETRIC
SCALE 3:5

PRELIMINARY: PHONE INTERFACE DIMENSIONS TO BE VERIFIED AGAINST APPLE ACCESSORY DESIGN GUIDELINES

ELLIOTT WAVE LABS khensu.nu	DRAWN / DATE EW 2026-10-10	THIRD ANGLE
MATERIAL LSR, SHORE 55A	FINISH MATTE TEXTURE (VDI 27)	
SILICONE SHOCK CASE - ISLAND		
PART KHENSU SHELL - CASE		
DRAWING NUMBER KS-ISLAND-CASE-201		SIZE A3
SCALE 1:1	MASS (EST.) 18 G	SHEET 18 OF 18
		REV A

NOTES

1. DIMENSIONS IN MM. LIQUID SILICONE RUBBER, SHORE 55A ±5. STEP MODEL GOVERNS.
2. ADD 0.5-1° DRAFT TO ALL WALLS BEFORE TOOLING; PARTING LINE AT MAX OUTLINE.
3. BUTTON COVERS, SPEAKER, MIC AND USB-C OPENINGS PER APPLE DRAWINGS FOR TARGET MODEL.
4. GENERAL TOLERANCES ±0.15; CAMERA OPENING ±0.10.
5. HOLDS PHONE WITH WRAP MODULE (KS-*-WRAP-100). DROP TEST 1.2 M TO CONCRETE, 26 DROPS.