

## SPARK 29


	S HIGH BB setting	S LOW BB setting	M HIGH BB setting	M LOW BB setting	L HIGH BB setting	L LOW BB setting	XL HIGH BB setting	XL LOW BB setting
A HEAD TUBE ANGLE	70.1°	69.5°	70.1°	69.5°	70.1°	69.5°	70.1°	69.5°
B HEADTUBE LENGTH	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	115 mm 4.5 in	115 mm 4.5 in	125 mm 4.9 in	125 mm 4.9 in
C TOPTUBE LENGTH HORIZONTAL	568 mm 22.4 in	570 mm 22.4 in	598 mm 23.5 in	600 mm 23.6 in	628 mm 24.7 in	630 mm 24.8 in	649 mm 25.6 in	650 mm 25.6 in
D TOPTUBE LENGTH ACTUAL	518 mm 20.4 in	518 mm 20.4 in	539 mm 21.2 in	539 mm 21.2 in	566 mm 22.3 in	566 mm 22.3 in	588 mm 23.1 in	588 mm 23.1 in
E SEAT TUBE ANGLE	73.1°	72.5°	73.1°	72.5°	73.1°	72.5°	73.1°	72.5°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 in	400 mm 15.7 in	440 mm 17.3 in	440 mm 17.3 in	481 mm 18.9 in	481 mm 18.9 in	541 mm 21.3 in	541 mm 21.3 in
G BB CENTER TO TOPTUBE CENTER	335 mm 13.2 in	335 mm 13.2 in	350 mm 13.8 in	350 mm 13.8 in	403 mm 15.9 in	403 mm 15.9 in	448 mm 17.6 in	448 mm 17.6 in
H CHAINSTAY LENGTH	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in
I BB OFFSET	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in
J BB HEIGHT	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in
STANDOVER HEIGHT	762 mm 30.0 in	758 mm 29.8 in	768 mm 30.2 in	764 mm 30.1 in	806 mm 31.7 in	802 mm 31.6 in	836 mm 32.9 in	833 mm 32.8 in
WHEELBASE	1082 mm 42.6 in	1082 mm 42.6 in	1112 mm 43.8 in	1112 mm 43.8 in	1143 mm 45.0 in	1143 mm 45.0 in	1163 mm 45.8 in	1163 mm 45.8 in
K REACH	386 mm 15.2 in	379 mm 14.9 in	416 mm 16.4 in	409 mm 16.1 in	442 mm 17.4 in	436 mm 17.2 in	456 mm 18.0 in	453 mm 17.8 in
L STACK	602 mm 23.7 in	606 mm 23.9 in	602 mm 23.7 in	606 mm 23.9 in	611 mm 24.1 in	615 mm 24.2 in	623 mm 24.5 in	625 mm 24.6 in
STEM LENGTH	70 mm	70 mm	80 mm	80 mm	90 mm	90 mm	100 mm	100 mm

SCOTT SUMMER 2013 SERVICE



## SPARK 26

	S HIGH BB setting	S LOW BB setting	M HIGH BB setting	M LOW BB setting	L HIGH BB setting	L LOW BB setting	XL HIGH BB setting	XL LOW BB setting
A HEAD TUBE ANGLE	68.7°	68.0°	68.7°	68.0°	68.7°	68.0°	68.7°	68.0°
B HEADTUBE LENGTH	110 mm 4.3 in	110 mm 4.3 in	120 mm 4.7 in	120 mm 4.7 in	140 mm 5.5 in	140 mm 5.5 in	160 mm 6.3 in	160 mm 6.3 in
C TOPTUBE LENGTH HORIZONTAL	553 mm 21.8 in	555 mm 21.9 in	589 mm 23.2 in	590 mm 23.2 in	618 mm 24.3 in	620 mm 24.4 in	648 mm 25.5 in	650 mm 25.6 in
D TOPTUBE LENGTH ACTUAL	509 mm 20.0 in	509 mm 20.0 in	540 mm 21.3 in	540 mm 21.3 in	570 mm 22.4 in	570 mm 22.4 in	602 mm 23.7 in	602 mm 23.7 in
E SEAT TUBE ANGLE	74.2°	73.5°	74.2°	73.5°	74.2°	73.5°	74.2°	73.5°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 in	400 mm 15.7 in	450 mm 17.7 in	450 mm 17.7 in	490 mm 19.3 in	490 mm 19.3 in	540 mm 21.3 in	540 mm 21.3 in
G BB CENTER TO TOPTUBE CENTER	331 mm 13.0 in	331 mm 13.0 in	347 mm 13.7 in	347 mm 13.7 in	395 mm 15.6 in	395 mm 15.6 in	435 mm 17.1 in	435 mm 17.1 in
H CHAINSTAY LENGTH	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in	420 mm 16.5 in
I BB OFFSET	2 mm 0.1 in	-8 mm -0.3 in	2 mm 0.1 in	-8 mm -0.3 in	2 mm 0.1 in	-8 mm -0.3 in	2 mm 0.1 in	-8 mm -0.3 in
J BB HEIGHT	342 mm 13.5 in	332 mm 13.1 in	342 mm 13.5 in	332 mm 13.1 in	342 mm 13.5 in	332 mm 13.1 in	342 mm 13.5 in	332 mm 13.1 in
STANDOVER HEIGHT	757 mm 29.8 in	753 mm 29.6 in	767 mm 30.2 in	763 mm 30.0 in	804 mm 31.7 in	800 mm 31.5 in	835 mm 32.9 in	830 mm 32.7 in
WHEELBASE	1072 mm 42.2 in	1073 mm 42.2 in	1108 mm 43.6 in	1109 mm 43.7 in	1140 mm 44.9 in	1141 mm 44.9 in	1172 mm 46.1 in	1173 mm 46.2 in
K REACH	397 mm 15.6 in	391 mm 15.4 in	429 mm 16.9 in	423 mm 16.7 in	453 mm 17.8 in	448 mm 17.6 in	478 mm 18.9 in	473 mm 18.6 in
L STACK	552 mm 21.7 in	556 mm 21.9 in	561 mm 22.1 in	565 mm 22.2 in	579 mm 22.8 in	583 mm 23.0 in	598 mm 23.5 in	602 mm 23.7 in
STEM LENGTH	70 mm	70 mm	80 mm	80 mm	90 mm	90 mm	100 mm	100 mm

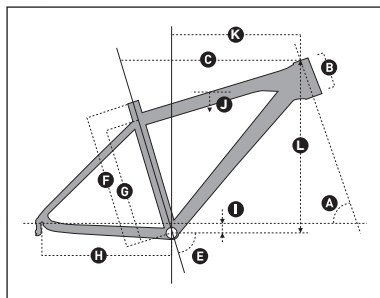

## SCALE 29 CARBON

	S		M		L		XL	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°		69.5°	
B HEADTUBE LENGTH	105 mm	4.1 inches	105 mm	4.1 inches	115 mm	4.5 inches	125 mm	4.9 inches
C TOPTUBE LENGTH HORIZONTAL	580 mm	22.8 inches	600 mm	23.6 inches	620 mm	24.4 inches	640 mm	25.2 inches
E SEAT TUBE ANGLE	72.5°		72.5°		72.5°		72.5°	
F BB CENTER TO TOP OF SEATTUBE	390 mm	15.4 inches	440 mm	17.3 inches	480 mm	18.9 inches	530 mm	20.9 inches
G BB CENTER TO TOPTUBE CENTER	329 mm	13.0 inches	375 mm	14.8 inches	415 mm	16.3 inches	465 mm	18.3 inches
H CHAINSTAY LENGTH	438 mm	17.2 inches	438 mm	17.2 inches	438 mm	17.2 inches	438 mm	17.2 inches
I BB OFFSET	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches
BB HEIGHT	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches
J STANDOVER HEIGHT	756 mm	29.8 inches	783 mm	30.8 inches	810 mm	31.9 inches	842 mm	33.1 inches
WHEELBASE	1079 mm	42.5 inches	1096 mm	43.1 inches	1117 mm	44.0 inches	1137 mm	44.8 inches
K REACH	385 mm	15.2 inches	405 mm	15.9 inches	422 mm	16.6 inches	439 mm	17.3 inches
L STACK	618 mm	24.3 inches	618 mm	24.3 inches	628 mm	24.7 inches	637 mm	25.1 inches
STEM LENGTH	70 mm		80 mm		90 mm		100 mm	

## SCALE 29 ALLOY

	S		M		L		XL	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°		69.5°	
B HEADTUBE LENGTH	105 mm	4.1 inches	115 mm	4.5 inches	125 mm	4.9 inches	140 mm	5.5 inches
C TOPTUBE LENGTH HORIZONTAL	590 mm	23.2 inches	600 mm	23.6 inches	620 mm	24.4 inches	640 mm	25.2 inches
E SEAT TUBE ANGLE	72.5°		72.5°		72.5°		72.5°	
F BB CENTER TO TOP OF SEATTUBE	395 mm	15.6 inches	440 mm	17.3 inches	480 mm	18.9 inches	530 mm	20.9 inches
G BB CENTER TO TOPTUBE CENTER	333 mm	13.1 inches	378 mm	14.9 inches	418 mm	16.5 inches	468 mm	18.4 inches
H CHAINSTAY LENGTH	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches
I BB OFFSET	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches
J STANDOVER HEIGHT	753 mm	29.6 inches	785 mm	30.9 inches	811 mm	31.9 inches	848 mm	33.4 inches
WHEELBASE	1086 mm	42.8 inches	1097 mm	43.2 inches	1127 mm	44.4 inches	1141 mm	44.9 inches
STEM LENGTH	70 mm		80 mm		90 mm		100 mm	

## SCALE 26

	XS (ALLOY MODEL)	S		M		L		XL		XXL (ALLOY MODEL)
A HEAD TUBE ANGLE	70.0°	70.0°		70.0°		70.0°		70.0°		70.0°
B HEADTUBE LENGTH	100 mm	3.9 inches	110 mm	4.3 inches	120 mm	4.7 inches	135 mm	5.3 inches	160 mm	6.3 inches
C TOPTUBE LENGTH HORIZONTAL	540 mm	21.3 inches	555 mm	21.9 inches	585 mm	23.0 inches	610 mm	24.0 inches	640 mm	25.2 inches
E SEAT TUBE ANGLE	73.5°	73.5°		73.5°		73.5°		73.5°		73.5°
F BB CENTER TO TOP OF SEATTUBE	350 mm	13.8 inches	390 mm	15.4 inches	440 mm	17.3 inches	480 mm	18.9 inches	530 mm	20.9 inches
G BB CENTER TO TOPTUBE CENTER	284 mm	11.2 inches	324 mm	12.8 inches	374 mm	14.7 inches	414 mm	16.3 inches	464 mm	18.3 inches
H CHAINSTAY LENGTH	420 mm	16.5 inches	420 mm	16.5 inches	420 mm	16.5 inches	420 mm	16.5 inches	420 mm	16.5 inches
I BB OFFSET	30 mm	1.2 inches	30 mm	1.2 inches	30 mm	1.2 inches	30 mm	1.2 inches	30 mm	1.2 inches
BB HEIGHT	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches
J STANDOVER HEIGHT	695 mm	27.4 inches	733 mm	28.9 inches	765 mm	30.1 inches	792 mm	31.2 inches	830 mm	32.7 inches
WHEELBASE	1025 mm	40.4 inches	1073 mm	42.2 inches	1073 mm	42.2 inches	1099 mm	43.3 inches	1131 mm	44.5 inches
K REACH	380 mm	15.0 inches	387 mm	15.2 inches	414 mm	16.3 inches	435 mm	17.1 inches	458 mm	18.0 inches
L STACK	552 mm	21.7 inches	566 mm	22.3 inches	576 mm	22.7 inches	590 mm	23.2 inches	613 mm	24.1 inches
STEM LENGTH	70 mm		70 mm		80 mm		90 mm		100 mm	
										110 mm







## GENIUS 900

	S		M		L		XL	
	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION
FORK RAKE	46.0 mm	18 inches	46.0 mm	18 inches	46.0 mm	18 inches	46.0 mm	18 inches
A HEAD TUBE ANGLE	69.0°	69.5°	69.0°	69.5°	69.0°	69.5°	69.0°	69.5°
B HEADTUBE LENGTH	100.0 mm	3.9 inches	100.0 mm	3.9 inches	110.0 mm	4.3 inches	120.0 mm	4.7 inches
C LENGTH	570.0 mm	22.4 inches	600.0 mm	23.6 inches	625.0 mm	24.6 inches	650.0 mm	25.6 inches
E SEAT TUBE ANGLE	74.0°	74.5°	74.0°	74.5°	74.0°	74.5°	74.0°	74.5°
F TO TOP OF SEATTUBE	415.0 mm	16.3 inches	440.0 mm	17.3 inches	475.0 mm	18.7 inches	500.0 mm	20.1 inches
H CHANSTAY LENGTH	450 mm	17.7 inches	450 mm	17.7 inches	450 mm	17.7 inches	450 mm	17.7 inches
I BB OFFSET	-35.0 mm	-1.4 inches	-35.0 mm	-1.4 inches	-35.0 mm	-1.4 inches	-35.0 mm	-1.4 inches
J BB HEIGHT	335.0 mm	13.2 inches	335.0 mm	13.2 inches	335.0 mm	13.2 inches	335.0 mm	13.2 inches
G STANDOVER HEIGHT	766.0 mm	30.2 inches	772.0 mm	30.4 inches	801.0 mm	31.5 inches	808.0 mm	31.8 inches
L WHEELBASE	1111 mm	43.7 inches	1141 mm	44.9 inches	1167 mm	45.9 inches	1193 mm	47.0 inches
M REACH	395.0 mm	15.6 inches	425.0 mm	16.7 inches	448.0 mm	17.6 inches	470.0 mm	18.5 inches
N STACK	609.0 mm	24.0 inches	609.0 mm	24.0 inches	618.0 mm	24.3 inches	628.0 mm	24.7 inches
STEM LENGTH	60	60	70	70	80	80	90	90

## GENIUS 700


	S		M		L		XL	
	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION	LOW POSITION	HIGH POSITION
FORK RAKE	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches
A HEAD TUBE ANGLE	67.7°	68.2°	67.7°	68.2°	67.7°	68.2°	67.7°	68.2°
B HEADTUBE LENGTH	100.0 mm	3.9 inches	110.0 mm	4.3 inches	120.0 mm	4.7 inches	135.0 mm	5.3 inches
C LENGTH	570.0 mm	22.4 inches	600.0 mm	23.6 inches	625.0 mm	24.6 inches	650.0 mm	25.6 inches
E SEAT TUBE ANGLE	73.8°	74.3°	73.8°	74.3°	73.8°	74.3°	73.8°	74.3°
F TO TOP OF SEATTUBE	415.0 mm	16.3 inches	440.0 mm	17.3 inches	475.0 mm	18.7 inches	500.0 mm	20.1 inches
H CHANSTAY LENGTH	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches
I BB OFFSET	-10.0 mm	-0.4 inches	-10.0 mm	-0.4 inches	-10.0 mm	-0.4 inches	-10.0 mm	-0.4 inches
J BB HEIGHT	346.0 mm	13.6 inches	346.0 mm	13.6 inches	346.0 mm	13.6 inches	346.0 mm	13.6 inches
G STANDOVER HEIGHT	776.0 mm	30.6 inches	777.0 mm	30.6 inches	809.0 mm	31.9 inches	815.0 mm	32.1 inches
L WHEELBASE	1124 mm	44.3 inches	1155 mm	45.5 inches	1181 mm	46.6 inches	1208 mm	47.6 inches
M REACH	399.0 mm	15.7 inches	427.0 mm	16.8 inches	449.0 mm	17.7 inches	470.0 mm	18.5 inches
N STACK	590.0 mm	23.2 inches	599.0 mm	23.6 inches	609.0 mm	24.0 inches	623.0 mm	24.5 inches
STEM LENGTH	60	60	70	70	80	80	90	90

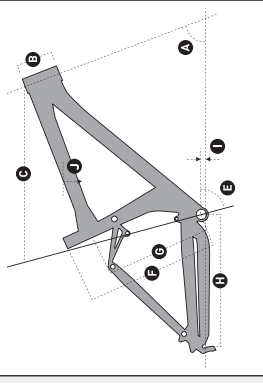

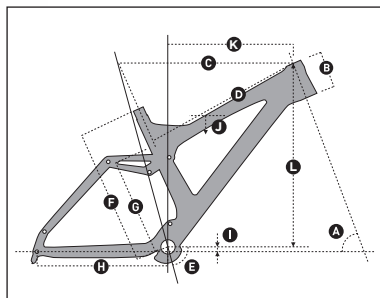


## GENIUS LT

	<b>S</b> <b>HIGH BB setting</b>		<b>S</b> <b>LOW BB setting</b>		<b>M</b> <b>HIGH BB setting</b>		<b>M</b> <b>LOW BB setting</b>		<b>L</b> <b>HIGH BB setting</b>		<b>L</b> <b>LOW BB setting</b>	
A HEAD TUBE ANGLE	67.0°		66.3°		67.0°		66.3°		67.0°		66.3°	
B HEADTUBE LENGTH	120 mm	4.7 inches	120 mm	4.7 inches	120 mm	4.7 inches	120 mm	4.7 inches	120 mm	4.7 inches	120 mm	4.7 inches
C TOPTUBE LENGTH HORIZONTAL	560 mm	22.0 inches	560 mm	22.0 inches	585 mm	23.0 inches	585 mm	23.0 inches	610 mm	24.0 inches	610 mm	24.0 inches
D TOPTUBE LENGTH ACTUAL	502 mm	19.8 inches	502 mm	19.8 inches	523 mm	20.6 inches	523 mm	20.6 inches	544 mm	21.4 inches	544 mm	21.4 inches
E SEAT TUBE ANGLE	74.2°		73.5°		74.2°		73.5°		74.2°		73.5°	
F BB CENTER TO TOP OF SEATTUBE	440 mm	17.3 inches	440 mm	17.3 inches	460 mm	18.1 inches	460 mm	18.1 inches	490 mm	19.3 inches	490 mm	19.3 inches
G BB CENTER TO TOPTUBE CENTER	306 mm	12.0 inches	306 mm	12.0 inches	310 mm	12.2 inches	310 mm	12.2 inches	326 mm	12.8 inches	326 mm	12.8 inches
H CHAINSTAY LENGTH	428 mm	16.9 inches	428 mm	16.9 inches	428 mm	16.9 inches	428 mm	16.9 inches	428 mm	16.9 inches	428 mm	16.9 inches
I BB OFFSET	23 mm	0.9 inches	15 mm	0.6 inches	23 mm	0.9 inches	15 mm	0.6 inches	23 mm	0.9 inches	15 mm	0.6 inches
J BB HEIGHT	367 mm	14.4 inches	358 mm	14.1 inches	367 mm	14.4 inches	358 mm	14.1 inches	367 mm	14.4 inches	358 mm	14.1 inches
K STANDOVER HEIGHT	779 mm	30.7 inches	775 mm	30.5 inches	780 mm	30.7 inches	775 mm	30.5 inches	788 mm	31.0 inches	783 mm	30.8 inches
L WHEELBASE	1122 mm	44.2 inches	1125 mm	44.3 inches	1147 mm	45.2 inches	1150 mm	45.3 inches	1172 mm	46.1 inches	1175 mm	46.3 inches
M REACH	390 mm	15.4 inches	383 mm	15.1 inches	414 mm	16.3 inches	408 mm	16.1 inches	439 mm	17.3 inches	433 mm	17.0 inches
N STACK	594 mm	23.4 inches	599 mm	23.6 inches	594 mm	23.4 inches	599 mm	23.6 inches	594 mm	23.4 inches	599 mm	23.6 inches
O STEM LENGTH	60 mm		60 mm		60 mm		60 mm		70 mm		70 mm	

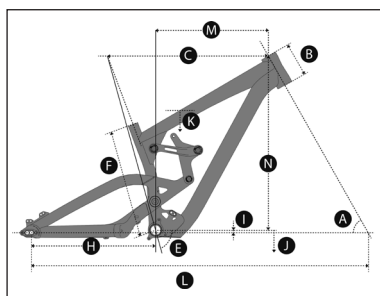

## GAMBLER


	<b>S</b> <b>LOW POSITION</b>		<b>S</b> <b>HIGH POSITION</b>		<b>M</b> <b>LOW POSITION</b>		<b>M</b> <b>HIGH POSITION</b>		<b>L</b> <b>LOW POSITION</b>		<b>L</b> <b>HIGH POSITION</b>	
FORK RAKE	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches	42.0 mm	1.7 inches
A HEAD TUBE ANGLE	62.0°		62.7°		62.0°		62.7°		62.0°		62.7°	
B HEADTUBE LENGTH	115.0 mm	4.5 inches	115.0 mm	4.5 inches	115.0 mm	4.5 inches	115.0 mm	4.5 inches	115.0 mm	4.5 inches	115.0 mm	4.5 inches
C TOPTUBE LENGTH HORIZONTAL	525.0 mm	22.7 inches	522.0 mm	20.6 inches	550.0 mm	21.7 inches	547.0 mm	21.5 inches	584.5 mm	23.0 inches	582.0 mm	22.9 inches
E SEAT TUBE ANGLE	75.6°		76.5°		75.6°		76.5°		75.6°		76.5°	
F BB CENTER TO TOP OF SEATTUBE	370.0 mm	14.6 inches	370.0 mm	14.6 inches	370.0 mm	14.6 inches	370.0 mm	14.6 inches	370.0 mm	14.6 inches	370.0 mm	14.6 inches
H CHAINSTAY LENGTH	425 mm	16.7 inches	421.5 mm	16.6 inches	425 mm	16.7 inches	421.5 mm	16.6 inches	425 mm	16.7 inches	421.5 mm	16.6 inches
I BB OFFSET	0.0 mm	0.0 inches	+ 9.5 mm	0.4 inches	0.0 mm	0.0 inches	+ 9.5 mm	0.4 inches	0.0 mm	0.0 inches	+ 9.5 mm	0.4 inches
J BB HEIGHT	345.0 mm	13.6 inches	354.5 mm	14.0 inches	345.0 mm	13.6 inches	354.5 mm	14.0 inches	345.0 mm	13.6 inches	354.5 mm	14.0 inches
G STANDOVER HEIGHT	762.6 mm	30.0 inches	767.6 mm	30.2 inches	758.0 mm	29.8 inches	763.5 mm	30.1 inches	754.0 mm	29.7 inches	760.0 mm	29.9 inches
L WHEELBASE	1160 mm	45.7 inches	1156 mm	45.5 inches	1185 mm	46.7 inches	1181 mm	46.5 inches	1210 mm	47.6 inches	1206 mm	47.5 inches
M REACH	1175 mm	46.3 inches	1171 mm	46.1 inches	1200 mm	47.2 inches	1196 mm	47.1 inches	1225 mm	48.2 inches	1221 mm	48.1 inches
N STACK	374.0 mm	14.7 inches	381.5 mm	15.0 inches	399.0 mm	15.7 inches	406.0 mm	16.0 inches	434.0 mm	17.1 inches	441.0 mm	17.4 inches
O STACK	589.0 mm	23.2 inches	593.0 mm	23.3 inches	589.0 mm	23.2 inches	593.0 mm	23.3 inches	589.0 mm	23.2 inches	593.0 mm	23.3 inches

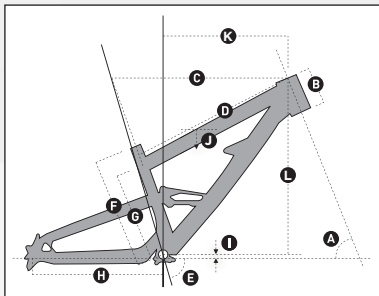

## VOLTAGE FR


	SHORT	LONG
A HEAD TUBE ANGLE	65.0°	65.0°
B HEADTUBE LENGTH	118 mm 4.6 inches	118 mm 4.6 inches
C TOPTUBE LENGTH HORIZONTAL	557 mm 21.9 inches	582 mm 22.9 inches
D TOPTUBE LENGTH ACTUAL	533 mm 21.0 inches	555 mm 21.9 inches
E SEAT TUBE ANGLE	73.3°	73.3°
F BB CENTER TO TOP OF SEATTUBE	365 mm 14.4 inches	365 mm 14.4 inches
G BB CENTER TO TOPTUBE CENTER	307 mm 12.1 inches	307 mm 12.1 inches
H CHAINSTAY LENGTH **	425 mm 16.7 inches	425 mm 16.7 inches
I BB OFFSET	3 mm 0.1 inches	3 mm 0.1 inches
J BB HEIGHT	348 mm 13.7 inches	348 mm 13.7 inches
K STANDOVER HEIGHT	768 mm 30.2 inches	768 mm 30.2 inches
WHEELBASE	1134 mm 44.6 inches	1159 mm 45.6 inches
L REACH	379 mm 14.9 inches	404 mm 15.9 inches
M STACK	600 mm 23.6 inches	600 mm 23.6 inches
STEM LENGTH	40 mm	40 mm

\*\* All measurements are done with 0mm dropouts.  
Chainstay length adjustable with different dropouts : -10mm / 0mm / +10 mm

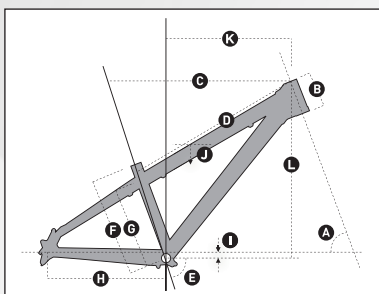

## VOLTAGE

	A FRAME	B FRAME	D FRAME 26"	D FRAME 24"
	ONE SIZE	ONE SIZE	ONE SIZE	ONE SIZE
A HEAD TUBE ANGLE	68.5°	68.5°	68.5°	69.0°
B HEADTUBE LENGTH	110 mm 4.3 inches	110 mm 4.3 inches	110 mm 4.3 inches	110 mm 4.3 inches
C TOPTUBE LENGTH HORIZONTAL	595 mm 23.4 inches	575 mm 22.6 inches	585 mm 23.0 inches	584 mm 23.0 inches
D TOPTUBE LENGTH ACTUAL	567 mm 22.3 inches	568 mm 22.4 inches	574 mm 22.6 inches	563 mm 22.2 inches
E SEAT TUBE ANGLE	71.0°	74.0°	74.0°	70.3°
F BB CENTER TO TOP OF SEATTUBE	316 mm 12.4 inches	330 mm 13.0 inches	330 mm 13.0 inches	260 mm 10.2 inches
G BB CENTER TO TOPTUBE CENTER	266 mm 10.5 inches	280 mm 11.0 inches	280 mm 11.0 inches	215 mm 8.5 inches
H CHAINSTAY LENGTH	385 mm - with IDS washer +5mm or -6mm	405 mm 15.9 inches	405 mm 15.9 inches	360 mm 14.2 inches
I BB OFFSET	-15 mm -0.6 inches	-15 mm -0.6 inches	-22 mm -0.9 inches	-3 mm -0.1 inches
BB HEIGHT	325 mm 12.8 inches	325 mm 12.8 inches	318 mm 12.5 inches	307 mm 12.1 inches
J STANDOVER HEIGHT	702 mm 27.6 inches	707 mm 27.8 inches	707 mm 27.8 inches	690 mm 27.2 inches
WHEELBASE	1050 mm 41.3 inches	1078 mm 42.4 inches	1073 mm 42.2 inches	999 mm 39.3 inches
K REACH	400 mm 15.7 inches	414 mm 16.3 inches	- -	- -
L STACK	567 mm 22.3 inches	562 mm 22.1 inches	- -	- -
STEM LENGTH	40 mm	40 mm	40 mm	40 mm

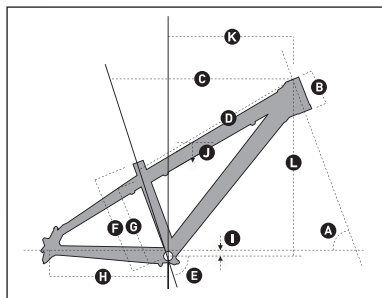


## VOLTAGE C FRAME

	XS	S	M	L	XL
A HEAD TUBE ANGLE	68.5°	69.0°	69.0°	69.5°	69.5°
B HEADTUBE LENGTH	100 mm 3.9 inches	110 mm 4.3 inches	120 mm 4.7 inches	135 mm 5.3 inches	150 mm 5.9 inches
C TOPTUBE LENGTH HORIZONTAL	540 mm 21.3 inches	550 mm 21.7 inches	560 mm 22.0 inches	570 mm 22.4 inches	585 mm 23.0 inches
D TOPTUBE LENGTH ACTUAL	538 mm 21.2 inches	538 mm 21.2 inches	541 mm 21.3 inches	548 mm 21.6 inches	562 mm 22.1 inches
E SEAT TUBE ANGLE	74.0°	73.5°	73.0°	73.0°	73.0°
F BB CENTER TO TOP OF SEATTUBE	330 mm 13.0 inches	370 mm 14.6 inches	410 mm 16.1 inches	460 mm 18.1 inches	510 mm 20.1 inches
G BB CENTER TO TOPTUBE CENTER	280 mm 11.0 inches	320 mm 12.6 inches	360 mm 14.2 inches	410 mm 16.1 inches	550 mm 21.7 inches
H CHAINSTAY LENGTH	420 mm 16.5 inches	420 mm 16.5 inches	420 mm 16.5 inches	420 mm 16.5 inches	420 mm 16.5 inches
I BB OFFSET	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches
BB HEIGHT	303 mm 11.9 inches	303 mm 11.9 inches	303 mm 11.9 inches	303 mm 11.9 inches	303 mm 11.9 inches
J STANDOVER HEIGHT	684 mm 26.9 inches	715 mm 28.1 inches	746 mm 29.4 inches	786 mm 30.9 inches	823 mm 32.4 inches
WHEELBASE	1050 mm 41.3 inches	1050 mm 41.3 inches	1055 mm 41.5 inches	1061 mm 41.8 inches	1077 mm 42.4 inches
STEM LENGTH	40 mm	40 mm	40 mm	60 mm	60 mm





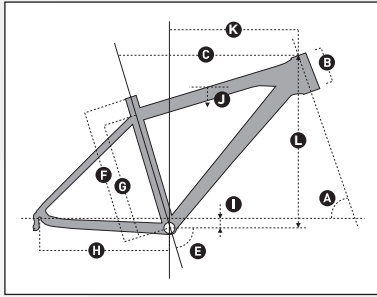

## E-ASPECT 29"

	M		L		XL	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°	
B HEADTUBE LENGTH	115 mm	4.5 inches	125 mm	4.9 inches	140 mm	5.5 inches
C TOPTUBE LENGTH HORIZONTAL	585 mm	23.0 inches	605 mm	23.8 inches	625 mm	24.6 inches
E SEAT TUBE ANGLE	72.5°		72.5°		72.5°	
F BB CENTER TO TOP OF SEATTUBE	440 mm	17.3 inches	480 mm	18.9 inches	530 mm	20.9 inches
G BB CENTER TO TOPTUBE CENTER	385 mm	15.2 inches	425 mm	16.7 inches	475 mm	18.7 inches
H CHAINSTAY LENGTH	450 mm	17.7 inches	450 mm	17.7 inches	450 mm	17.7 inches
I BB OFFSET	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches
J STANDOVER HEIGHT	817 mm	32.2 inches	842 mm	33.1 inches	875 mm	34.4 inches
WHEELBASE	1094 mm	43.1 inches	1115 mm	43.9 inches	1136 mm	44.7 inches
K REACH	588 mm	15.3 inches	405 mm	15.9 inches	420 mm	16.5 inches
L STACK	626 mm	24.6 inches	635 mm	25.0 inches	649 mm	25.6 inches
STEM LENGTH	90 mm		90 mm		100 mm	


## ASPECT 29"

	S	M	L	XL
A HEAD TUBE ANGLE	69.5°	69.5°	69.5°	69.5°
B HEADTUBE LENGTH	105 mm 4.1 inches	115 mm 4.5 inches	125 mm 4.9 inches	140 mm 5.5 inches
C TOPTUBE LENGTH HORIZONTAL	575 mm 22.6 inches	585 mm 23.0 inches	605 mm 23.8 inches	625 mm 24.6 inches
E SEAT TUBE ANGLE	72.5°	72.5°	72.5°	72.5°
F BB CENTER TO TOP OF SEATTUBE	395 mm 15.6 inches	440 mm 17.3 inches	480 mm 18.9 inches	530 mm 20.9 inches
G BB CENTER TO TOPTUBE CENTER	340 mm 13.4 inches	385 mm 15.2 inches	425 mm 16.7 inches	475 mm 18.7 inches
H CHAINSTAY LENGTH	450 mm 17.7 inches	450 mm 17.7 inches	450 mm 17.7 inches	450 mm 17.7 inches
I BB OFFSET	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches
J STANDOVER HEIGHT	786 mm 30.9 inches	817 mm 32.2 inches	842 mm 33.1 inches	875 mm 34.4 inches
WHEELBASE	1084 mm 42.7 inches	1094 mm 43.1 inches	1115 mm 43.9 inches	1136 mm 44.7 inches
K REACH	381 mm 15.0 inches	388 mm 15.3 inches	405 mm 15.9 inches	420 mm 16.5 inches
L STACK	616 mm 24.3 inches	626 mm 24.6 inches	635 mm 25.0 inches	649 mm 25.6 inches
STEM LENGTH	75 mm	90 mm	90 mm	100 mm

## ASPECT 26"


	XS	S	M	L	XL	XXL
A HEAD TUBE ANGLE	69.5°	70.0°	70.5°	70.5°	71.0°	71.0°
B HEADTUBE LENGTH	105 mm 4.1 inches	115 mm 4.5 inches	130 mm 5.1 inches	145 mm 5.7 inches	160 mm 6.3 inches	175 mm 6.9 inches
C TOPTUBE LENGTH HORIZONTAL	545 mm 21.5 inches	555 mm 21.9 inches	570 mm 22.4 inches	585 mm 23.0 inches	600 mm 23.6 inches	620 mm 24.4 inches
E SEAT TUBE ANGLE	74.5°	74.0°	73.5°	73.5°	73.0°	73.0°
F BB CENTER TO TOP OF SEATTUBE	350 mm 13.8 inches	390 mm 15.4 inches	440 mm 17.3 inches	500 mm 19.7 inches	570 mm 22.4 inches	600 mm 23.6 inches
G BB CENTER TO TOPTUBE CENTER	296 mm 11.7 inches	336 mm 13.2 inches	386 mm 15.2 inches	446 mm 17.6 inches	516 mm 20.3 inches	546 mm 21.5 inches
H CHAINSTAY LENGTH	427 mm 16.8 inches	427 mm 16.8 inches	427 mm 16.8 inches	427 mm 16.8 inches	427 mm 16.8 inches	427 mm 16.8 inches
I BB OFFSET	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches	-32 mm -1.3 inches
J STANDOVER HEIGHT	739 mm 29.1 inches	758 mm 29.8 inches	778 mm 30.6 inches	799 mm 31.5 inches	817 mm 32.2 inches	847 mm 33.3 inches
WHEELBASE	1055 mm 41.5 inches	1055 mm 41.5 inches	1061 mm 41.8 inches	1076 mm 42.4 inches	1081 mm 42.6 inches	1101 mm 43.3 inches
STEM LENGTH	60 mm	75 mm	90 mm	100 mm	110 mm	110 mm



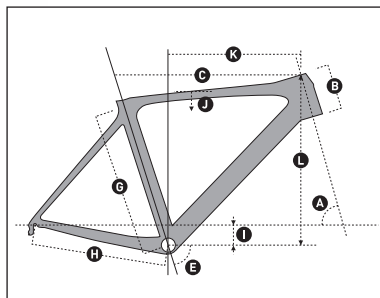

## FOIL

	XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	73.0°	73.0°	73.3°	73.3°
B HEADTUBE LENGTH	100 mm 3.9 inches	105 mm 4.1 inches	120 mm 4.7 inches	140 mm 5.5 inches	160 mm 6.3 inches	180 mm 7.1 inches	200 mm 7.9 inches
C TOPTUBE LENGTH HORIZONTAL	510 mm 20.1 inches	520 mm 20.5 inches	535 mm 21.1 inches	550 mm 21.7 inches	565 mm 22.2 inches	580 mm 22.8 inches	595 mm 23.4 inches
E SEAT TUBE ANGLE	74.5°	74.5°	74.0°	73.3°	73.3°	73.0°	72.5°
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches	520 mm 20.5 inches	550 mm 21.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	717 mm 28.2 inches	731 mm 28.8 inches	755 mm 29.7 inches	775 mm 30.5 inches	794 mm 31.3 inches	814 mm 32.0 inches	838 mm 33.0 inches
WHEELBASE	972 mm 38.3 inches	978 mm 38.5 inches	980 mm 38.6 inches	979 mm 38.5 inches	994 mm 39.1 inches	1003 mm 39.5 inches	1012 mm 39.8 inches
K REACH	371 mm 14.6 inches	379 mm 14.9 inches	384 mm 15.1 inches	385 mm 15.2 inches	394 mm 15.5 inches	400 mm 15.7 inches	403 mm 15.9 inches
L STACK	503 mm 19.8 inches	509 mm 20.0 inches	527 mm 20.7 inches	549 mm 21.6 inches	569 mm 22.4 inches	589 mm 23.2 inches	608 mm 23.9 inches
STEM LENGTH	90 mm	100 mm	110 mm	110 mm	110 mm	120 mm	130 mm

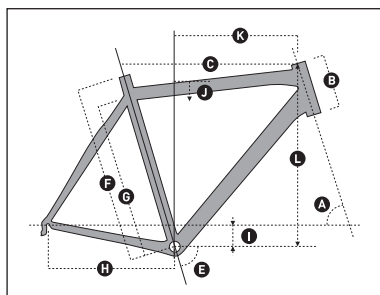


## CR1

	XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A HEAD TUBE ANGLE	70.5°	71.0°	73.0°	73.0°	73.0°	73.0°	73.0°
B HEADTUBE LENGTH	111 mm 4.4 inches	116 mm 4.6 inches	136 mm 5.4 inches	156 mm 6.1 inches	176 mm 6.9 inches	196 mm 7.7 inches	216 mm 8.5 inches
C TOPTUBE LENGTH HORIZONTAL	505 mm 19.9 inches	515 mm 20.3 inches	530 mm 20.9 inches	545 mm 21.5 inches	560 mm 22.0 inches	575 mm 22.6 inches	595 mm 23.4 inches
E SEAT TUBE ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°	73.3°	73.3°
F BB CENTER TO TOP OF SEATTUBE	470 mm 18.5 inches	490 mm 19.3 inches	520 mm 20.5 inches	540 mm 21.3 inches	560 mm 22.0 inches	580 mm 22.8 inches	610 mm 24.0 inches
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches	520 mm 20.5 inches	550 mm 21.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	723 mm 28.5 inches	737 mm 29.0 inches	765 mm 30.1 inches	784 mm 30.9 inches	803 mm 31.6 inches	823 mm 32.4 inches	847 mm 33.3 inches
WHEELBASE	975 mm 38.4 inches	978 mm 38.5 inches	980 mm 38.6 inches	981 mm 38.6 inches	992 mm 39.1 inches	1001 mm 39.4 inches	1021 mm 40.2 inches
K REACH	368 mm 14.5 inches	376 mm 14.8 inches	379 mm 14.9 inches	383 mm 15.1 inches	387 mm 15.2 inches	394 mm 15.5 inches	409 mm 16.1 inches
L STACK	513 mm 20.2 inches	519 mm 20.4 inches	545 mm 21.5 inches	565 mm 22.2 inches	584 mm 23.0 inches	603 mm 23.7 inches	620 mm 24.4 inches
STEM LENGTH	90 mm	100 mm	110 mm	110 mm	110 mm	120 mm	130 mm





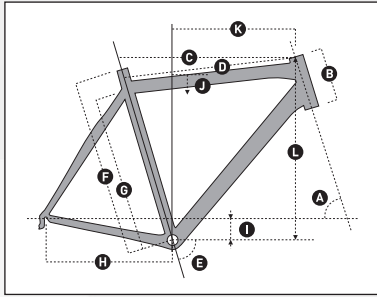

## SPEEDSTER

	XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A HEAD TUBE ANGLE	70.5°	71.0°	73.0°	73.0°	73.0°	73.0°	73.0°
B HEADTUBE LENGTH	111 mm 4.4 inches	116 mm 4.6 inches	136 mm 5.4 inches	156 mm 6.1 inches	176 mm 6.9 inches	196 mm 7.7 inches	216 mm 8.5 inches
C TOPTUBE LENGTH HORIZONTAL	505 mm 19.9 inches	515 mm 20.3 inches	530 mm 20.9 inches	545 mm 21.5 inches	560 mm 22.0 inches	575 mm 22.6 inches	595 mm 23.4 inches
E SEAT TUBE ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°	73.3°	73.3°
F BB CENTER TO TOP OF SEATTUBE	470 mm 18.5 inches	490 mm 19.3 inches	520 mm 20.5 inches	540 mm 21.3 inches	560 mm 22.0 inches	580 mm 22.8 inches	610 mm 24.0 inches
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches	520 mm 20.5 inches	550 mm 21.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	722 mm 28.4 inches	736 mm 29.0 inches	763 mm 30.0 inches	782 mm 30.8 inches	802 mm 31.6 inches	820 mm 32.3 inches	845 mm 33.3 inches
WHEELBASE	973 mm 38.3 inches	979 mm 38.5 inches	971 mm 38.2 inches	982 mm 38.7 inches	992 mm 39.1 inches	1004 mm 39.5 inches	1025 mm 40.4 inches
STEM LENGTH	90 mm	100 mm	100 mm	110 mm	110 mm	120 mm	120 mm


## METRIX MEN

	XS	S	M	L	XL
A HEAD TUBE ANGLE	71.0°	71.5°	72.0°	72.5°	73.0°
B HEADTUBE LENGTH	135 mm 5.3 inches	155 mm 6.1 inches	180 mm 7.1 inches	205 mm 8.1 inches	235 mm 9.3 inches
C TOPTUBE LENGTH HORIZONTAL	545 mm 21.5 inches	555 mm 22.0 inches	565 mm 22.3 inches	580 mm 22.8 inches	600 mm 23.6 inches
D TOPTUBE LENGTH ACTUAL	509 mm 20.0 inches	518 mm 20.4 inches	535 mm 21.1 inches	556 mm 21.9 inches	573 mm 22.6 inches
E SEAT TUBE ANGLE	75.0°	74.5°	74.0°	73.5°	73.0°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 inches	450 mm 17.7 inches	480 mm 18.9 inches	510 mm 20.1 inches	560 mm 22.0 inches
G BB CENTER TO TOPTUBE CENTER	343 mm 13.5 inches	394 mm 15.5 inches	424 mm 16.7 inches	455 mm 17.9 inches	505 mm 19.9 inches
H CHAINSTAY LENGTH	435 mm 17.1 inches	435 mm 17.1 inches	435 mm 17.1 inches	435 mm 17.1 inches	435 mm 17.1 inches
I BB OFFSET	-75 mm -3.0 inches	-75 mm -3.0 inches	-70 mm -2.8 inches	-70 mm -2.8 inches	-70 mm -2.8 inches
BB HEIGHT	275 mm 10.8 inches	275 mm 10.8 inches	280 mm 11.0 inches	280 mm 11.0 inches	280 mm 11.0 inches
J STANDOVER HEIGHT	786 mm 30.9 inches	825 mm 32.5 inches	851 mm 33.5 inches	879 mm 34.6 inches	921 36.3 inches
WHEELBASE	1020 mm 40.2 inches	1026 mm 40.4 inches	1038 mm 40.9 inches	1053 mm 41.5 inches	1061 mm 41.8 inches
K REACH	368 mm 14.5 inches	372 mm 14.6 inches	380 mm 15.0 inches	392 mm 15.4 inches	396 mm 15.6 inches
L STACK	568 mm 22.4 inches	589 mm 23.2 inches	610 mm 24.0 inches	635 mm 25.0 inches	666 mm 26.2 inches
STEM LENGTH	90 mm	90 mm	100 mm	100 mm	100 mm

## METRIX SOLUTION


	XS	S	M	L
A HEAD TUBE ANGLE	70.5°	71.0°	71.5°	72.0°
B HEADTUBE LENGTH	135 mm 5.3 inches	155 mm 6.1 inches	180 mm 7.1 inches	205 mm 8.1 inches
C TOPTUBE LENGTH HORIZONTAL	530 mm 21.5 inches	540 mm 21.3 inches	550 mm 21.7 inches	565 mm 22.3 inches
D TOPTUBE LENGTH ACTUAL	527 mm 20.7 inches	530 mm 20.9 inches	535 mm 21.1 inches	546 mm 21.5 inches
E SEAT TUBE ANGLE	75.0°	74.5°	74.0°	73.5°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 inches	450 mm 17.7 inches	480 mm 18.9 inches	510 mm 20.1 inches
G BB CENTER TO TOPTUBE CENTER	306 mm 12.0 inches	347 mm 13.7 inches	378 mm 14.9 inches	408 mm 16.1 inches
H CHAINSTAY LENGTH	435 mm 17.1 inches	435 mm 17.1 inches	435 mm 17.1 inches	435 mm 17.1 inches
I BB OFFSET	-75 mm -3.0 inches	-75 mm -3.0 inches	-70 mm -2.8 inches	-70 mm -2.8 inches
BB HEIGHT	275 mm 10.8 inches	275 mm 10.8 inches	280 mm 11.0 inches	280 mm 11.0 inches
J STANDOVER HEIGHT	760 mm 29.9 inches	795 mm 31.3 inches	824 mm 32.4 inches	854 mm 33.6 inches
WHEELBASE	1035 mm 40.7 inches	1036 mm 40.8 inches	1039 mm 40.9 inches	1044 mm 41.1 inches
K REACH	378 mm 14.9 inches	377 mm 14.8 inches	376 mm 14.8 inches	377 mm 14.8 inches
L STACK	566 mm 22.3 inches	587 mm 23.1 inches	608 mm 23.9 inches	633 mm 24.9 inches
STEM LENGTH	90 mm	90 mm	100 mm	100 mm



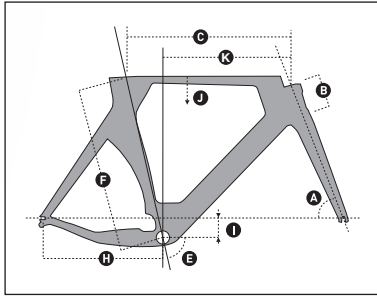

## PLASMA 3


	S	M	L
A HEAD TUBE ANGLE	72.5°	73.0°	73.0°
B HEADTUBE LENGTH	108 mm 4.3 inches	138 mm 5.4 inches	169 mm 6.7 inches
C TOPTUBE LENGTH HORIZONTAL	517 mm 20.4 inches	550 mm 21.7 inches	572 mm 22.5 inches
E SEAT TUBE ANGLE	76.0°	76.0°	76.0°
F BB CENTER TO TOPTUBE CENTER	510 mm 20.1 inches	540 mm 21.3 inches	570 mm 22.4 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-65 mm -2.6 inches	-65 mm -2.6 inches	-65 mm -2.6 inches
J STANDOVER HEIGHT	780 mm 30.7 inches	810 mm 31.9 inches	840 mm 33.1 inches
K REACH	390 mm 15.4 inches	415 mm 16.3 inches	430 mm 16.9 inches
STEM LENGTH	75 mm	75 mm	90 mm

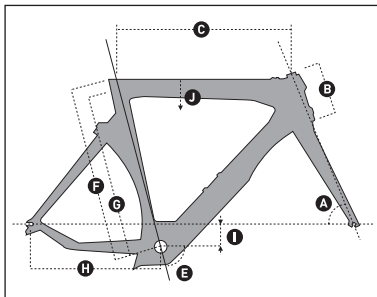

## PLASMA 2

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	71.0°	71.5°	72.0°	72.5°	72.5°
B HEADTUBE LENGTH	90 mm 3.5 inches	100 mm 3.9 inches	110 mm 4.3 inches	120 mm 4.7 inches	140 mm 5.5 inches
C TOPTUBE LENGTH HORIZONTAL	490 mm 19.3 inches	505 mm 19.9 inches	520 mm 20.5 inches	535 mm 21.1 inches	552 mm 21.7 inches
E SEAT TUBE ANGLE	76.0°	76.0°	76.0°	76.0°	76.0°
F BB CENTER TO TOP OF SEATTUBE	480 mm 18.9 inches	491 mm 19.3 inches	503 mm 19.8 inches	514 mm 20.2 inches	533 mm 21.0 inches
G BB CENTER TO TOPTUBE CENTER	465 mm 18.3 inches	476 mm 18.7 inches	488 mm 19.2 inches	499 mm 19.6 inches	519 mm 20.4 inches
H CHAINSTAY LENGTH	406 mm 16.0 inches	406 mm 16.0 inches	406 mm 16.0 inches	406 mm 16.0 inches	406 mm 16.0 inches
I BB OFFSET	-70 mm -2.8 inches	-70 mm -2.8 inches	-70 mm -2.8 inches	-70 mm -2.8 inches	-70 mm -2.8 inches
J STANDOVER HEIGHT	720 mm 28.3 inches	739 mm 29.1 inches	759 mm 29.9 inches	779 mm 30.7 inches	798 mm 31.4 inches
WHEELBASE	960 mm 37.8 inches	972 mm 38.3 inches	983 mm 38.7 inches	995 mm 39.2 inches	1013 mm 39.9 inches
STEM LENGTH	80 mm	90 mm	90 mm	110 mm	110 mm



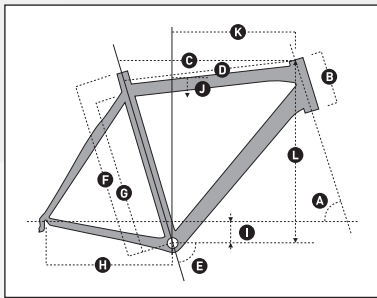


## OTG 10

	S	M	L
A HEAD TUBE ANGLE	72.0°	72.0°	72.0°
B HEADTUBE LENGTH	100 mm 3.9 inches	130 mm 5.1 inches	150 mm 5.9 inches
C TOPTUBE LENGTH HORIZONTAL	545 mm 21.5 inches	558 mm 22.0 inches	560 mm 22.0 inches
D TOPTUBE LENGTH ACTUAL	546 mm 21.5 inches	562 mm 22.1 inches	564 mm 22.2 inches
E SEAT TUBE ANGLE	74.0°	74.0°	74.0°
F BB CENTER TO TOP OF SEATTUBE	520 mm 20.5 inches	560 mm 22.0 inches	580 mm 22.8 inches
G BB CENTER TO TOPTUBE CENTER	480 mm 18.9 inches	520 mm 20.5 inches	540 mm 21.3 inches
H CHAINSTAY LENGTH	420 mm 16.5 inches	420 mm 16.5 inches	420 mm 16.5 inches
I BB OFFSET	-58 mm -2.3 inches	-58 mm -2.3 inches	-58 mm -2.3 inches
BB HEIGHT	282 mm 11.1 inches	282 mm 11.1 inches	282 mm 11.1 inches
J STANDOVER HEIGHT	818 mm 32.2 inches	845 mm 33.3 inches	875 mm 34.4 inches
WHEELBASE	1008 mm 39.7 inches	1022 mm 40.2 inches	1026 mm 40.4 inches
K REACH	414 mm 16.3 inches	408 mm 16.1 inches	405 mm 15.9 inches
L STACK	498 mm 19.6 inches	523 mm 20.6 inches	540 mm 21.3 inches
STEM LENGTH	90 mm	90 mm	90 mm

## OTG 20

	S	M	L
A HEAD TUBE ANGLE	72.0°	72.0°	72.0°
B HEADTUBE LENGTH	100 mm 3.9 inches	130 mm 5.1 inches	150 mm 5.9 inches
C TOPTUBE LENGTH HORIZONTAL	545 mm 21.5 inches	558 mm 22.0 inches	560 mm 22.0 inches
D TOPTUBE LENGTH ACTUAL	543 mm 21.4 inches	559 mm 22.0 inches	561 mm 22.1 inches
E SEAT TUBE ANGLE	74.0°	74.0°	74.0°
F BB CENTER TO TOP OF SEATTUBE	520 mm 20.5 inches	560 mm 22.0 inches	580 mm 22.8 inches
G BB CENTER TO TOPTUBE CENTER	480 mm 18.9 inches	520 mm 20.5 inches	540 mm 21.3 inches
H CHAINSTAY LENGTH	420 mm 16.5 inches	420 mm 16.5 inches	420 mm 16.5 inches
I BB OFFSET	-58 mm -2.3 inches	-58 mm -2.3 inches	-58 mm -2.3 inches
BB HEIGHT	282 mm 11.1 inches	282 mm 11.1 inches	282 mm 11.1 inches
J STANDOVER HEIGHT	821 mm 32.3 inches	852 mm 33.5 inches	890 34.6 inches
WHEELBASE	1009 mm 39.7 inches	1023 mm 40.3 inches	1026 mm 40.4 inches
K REACH	398 mm 15.7 inches	397 mm 15.6 inches	397 mm 15.6 inches
L STACK	506 mm 19.9 inches	534 mm 21.0 inches	553 mm 21.8 inches
STEM LENGTH	90 mm	90 mm	90 mm



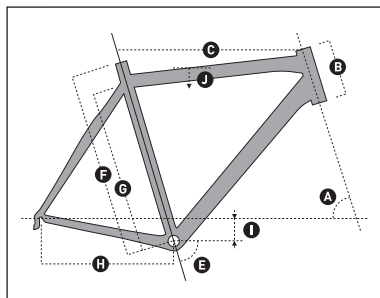


## CYCLOCROSS ADDICT

	XS		S		M		L		XL	
A HEAD TUBE ANGLE	70.0°		70.0°		71.0°		71.0°		71.1°	
B HEADTUBE LENGTH	105 mm	4.1 inches	120 mm	4.7 inches	140 mm	5.5 inches	160 mm	6.3 inches	180 mm	7.1 inches
C TOPTUBE LENGTH HORIZONTAL	515 mm	20.3 inches	525 mm	20.7 inches	545 mm	21.5 inches	555 mm	21.9 inches	570 mm	22.4 inches
E SEAT TUBE ANGLE	74.5°		74.0°		73.5°		73.0°		73.0°	
F BB CENTER TO TOP OF SEATTUBE	490 mm	19.3 inches	520 mm	20.5 inches	540 mm	21.3 inches	560 mm	22.0 inches	580 mm	22.8 inches
G BB CENTER TO TOPTUBE CENTER	446.8 mm	17.6 inches	462.9 mm	18.2 inches	486.1 mm	19.1 inches	507.5 mm	20.0 inches	522.2 mm	20.6 inches
H CHAINSTAY LENGTH	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches
I BB OFFSET	-65 mm	-2.6 inches	-65 mm	-2.6 inches	-68 mm	-2.7 inches	-68 mm	-2.7 inches	-68 mm	-2.7 inches
J STANDOVER HEIGHT	747.7 mm	29.4 inches	763.3 mm	30.1 inches	783.4 mm	30.8 inches	803.4 mm	31.6 inches	820.3 mm	32.3 inches
REACH	368.9 mm	14.5 inches	369.9 mm	14.6 inches	377.1 mm	14.9 inches	381.9 mm	15.0 inches	385.0 mm	15.2 inches
STACK	527 mm	20.7 inches	541.1 mm	21.3 inches	566.8 mm	22.3 inches	585.7 mm	23.1 inches	605.0 mm	23.8 inches

## CYCLOCROSS CX

	XS		S		M		L		XL	
A HEAD TUBE ANGLE	70.°		70.°		71.°		71.°		71.1°	
B HEADTUBE LENGTH	105 mm	4.1 inches	120 mm	4.7 inches	140 mm	5.5 inches	160 mm	6.3 inches	180 mm	7.1 inches
C TOPTUBE LENGTH HORIZONTAL	515 mm	20.3 inches	525 mm	20.7 inches	545 mm	21.5 inches	555 mm	21.9 inches	570 mm	22.4 inches
E SEAT TUBE ANGLE	74.3°		74.0°		73.3°		73.0°		73.0°	
F BB CENTER TO TOP OF SEATTUBE	490 mm	19.3 inches	520 mm	20.5 inches	540 mm	21.3 inches	560 mm	22.0 inches	580 mm	22.8 inches
G BB CENTER TO TOPTUBE CENTER	436 mm	17.2 inches	457.2 mm	18.0 inches	477.1 mm	18.8 inches	497.3 mm	19.6 inches	517.4 mm	20.4 inches
H CHAINSTAY LENGTH	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches	422 mm	16.6 inches
I BB OFFSET	-65 mm	-2.6 inches	-65 mm	-2.6 inches	-68 mm	-2.7 inches	-68 mm	-2.7 inches	-68 mm	-2.7 inches
J STANDOVER HEIGHT	747.7 mm	29.4 inches	763.3 mm	30.1 inches	783.4 mm	30.8 inches	803.4 mm	31.6 inches	820.3 mm	32.3 inches
REACH	368.9 mm	14.5 inches	369.9 mm	14.6 inches	377.1 mm	14.9 inches	381.9 mm	15.0 inches	385.0 mm	15.2 inches
STACK	527 mm	20.7 inches	369.9 mm	14.6 inches	377.1 mm	14.9 inches	381.9 mm	15.0 inches	385.0 mm	15.2 inches



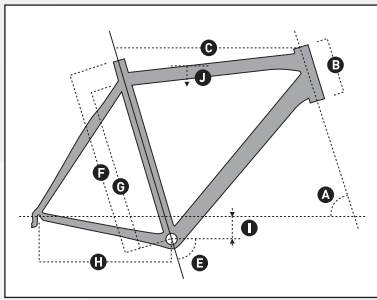


## E-SPORTSTER, SPORTSTER X MEN

	S	M	L	XL	XXL
A HEAD TUBE ANGLE	71.0°	71.5°	72.0°	72.5°	72.5°
B HEADTUBE LENGTH	105 mm 4.1 inches	125 mm 4.9 inches	145 mm 5.7 inches	165 mm 6.5 inches	185 mm 7.3 inches
C TOPTUBE LENGTH HORIZONTAL	567 mm 22.3 inches	577 mm 22.7 inches	592 mm 23.3 inches	608 mm 23.9 inches	620 mm 24.4 inches
E SEAT TUBE ANGLE	73.0°	72.5°	72.5°	72.0°	72.0°
F BB CENTER TO TOP OF SEATTUBE	450 mm 17.7 inches	480 mm 18.9 inches	510 mm 20.1 inches	550 mm 21.7 inches	590 mm 23.2 inches
G BB CENTER TO TOPTUBE CENTER	379 mm 14.9 inches	409 mm 16.1 inches	439 mm 17.3 inches	479 mm 18.9 inches	519 mm 20.4 inches
H CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
I BB OFFSET	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches
J STANDOVER HEIGHT	758 mm 29.8 inches	785 mm 30.9 inches	811 mm 31.9 inches	843 mm 33.2 inches	873 mm 34.4 inches
WHEELBASE	1068 mm 42.0 inches	1068 mm 42.0 inches	1077 mm 42.4 inches	1081 mm 42.6 inches	- -
STEM LENGTH	75 mm	90 mm	100 mm	110 mm	120 mm

## E-SPORTSTER, SPORTSTER X SOLUTION


	S	M	L	XL
A HEAD TUBE ANGLE	70.5°	71.0°	71.5°	72.0°
B HEADTUBE LENGTH	115 mm 4.5 inches	130 mm 5.1 inches	155 mm 6.1 inches	180 mm 7.1 inches
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 inches	565 mm 22.2 inches	575 mm 22.6 inches	590 mm 23.2 inches
E SEAT TUBE ANGLE	73.5°	73.0°	72.5°	72.5°
F BB CENTER TO TOP OF SEATTUBE	420 mm 16.5 inches	460 mm 18.1 inches	500 mm 19.7 inches	540 mm 21.3 inches
G BB CENTER TO TOPTUBE CENTER	320 mm 12.6 inches	353 mm 13.9 inches	393 mm 15.5 inches	434 mm 17.1 inches
H CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
I BB OFFSET	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches
J STANDOVER HEIGHT	729 mm 28.7 inches	755 mm 29.7 inches	792 mm 31.2 inches	826 mm 32.5 inches
WHEELBASE	1059 mm 41.7 inches	1063 mm 41.9 inches	1074 mm 42.3 inches	-
STEM LENGTH	75 mm	90 mm	100 mm	100 mm

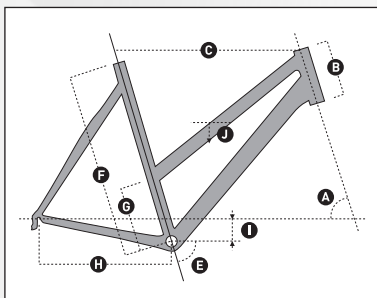

## E-SPORTSTER, SPORTSTER X LADY

	S	M	L	XL
A HEAD TUBE ANGLE	70.5°	71.0°	71.5°	72.0°
B HEADTUBE LENGTH	115 mm 4.5 inches	130 mm 5.1 inches	155 mm 6.1 inches	180 mm 7.1 inches
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 inches	565 mm 22.2 inches	575 mm 22.6 inches	590 mm 23.2 inches
D SEAT TUBE ANGLE	73.5°	73.0°	72.5°	72.5°
E BB CENTER TO TOP OF SEATTUBE	420 mm 16.5 inches	460 mm 18.1 inches	500 mm 19.7 inches	540 mm 21.3 inches
F BB CENTER TO TOPTUBE CENTER	240 mm 9.4 inches	240 mm 9.4 inches	250 mm 9.8 inches	250 mm 9.8 inches
G CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
H BB OFFSET	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches
I STANDOVER HEIGHT	663 mm 26.1 inches	668 mm 26.3 inches	688 mm 27.1 inches	695 mm 27.4 inches
WHEELBASE	1059 mm 41.7 inches	1063 mm 41.9 inches	1074 mm 42.3 inches	-
STEM LENGTH	70 mm	80 mm	90 mm	100 mm



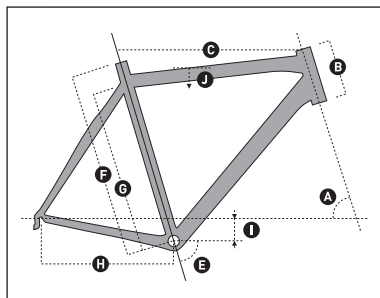

## SUB

	S	M	L	XL
A HEAD TUBE ANGLE	70.5°	71.0°	71.5°	72.0°
B HEADTUBE LENGTH	145 mm 5.7 inches	155 mm 6.1 inches	175 mm 6.9 inches	195 mm 7.7 inches
C TOPTUBE LENGTH HORIZONTAL	555 mm 21.9 inches	567 mm 22.3 inches	577 mm 22.7 inches	592 mm 23.3 inches
E SEAT TUBE ANGLE	73.5°	73.0°	72.5°	72.5°
F BB CENTER TO TOP OF SEATTUBE	440 mm 17.3 inches	480 mm 18.9 inches	520 mm 20.5 inches	550 mm 21.7 inches
G BB CENTER TO TOPTUBE CENTER	373 mm 14.7 inches	414 mm 16.3 inches	454 mm 17.9 inches	484 mm 19.1 inches
H CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
I BB OFFSET	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches
J STANDOVER HEIGHT	735 mm 28.9 inches	763 mm 30.0 inches	795 mm 31.3 inches	821 mm 32.3 inches
WHEELBASE	1073 mm 42.2 inches	1074 mm 42.3 inches	1075 mm 42.3 inches	1080 mm 42.5 inches
STEM LENGTH	90 mm	90 mm	100 mm	100 mm

## SUB SOLUTION

	S	M	L	XL
A HEAD TUBE ANGLE	70.0°	7.5°	71.0°	71.5°
B HEADTUBE LENGTH	155 mm 6.1 inches	165 mm 6.5 inches	185 mm 7.3 inches	205 mm 8.1 inches
C TOPTUBE LENGTH HORIZONTAL	540 mm 21.3 inches	550 mm 21.7 inches	565 mm 22.2 inches	578 mm 22.8 inches
E SEAT TUBE ANGLE	73.5°	73.5°	73.0°	72.0°
F BB CENTER TO TOP OF SEATTUBE	430 mm 16.9 inches	470 mm 18.5 inches	510 mm 20.1 inches	540 mm 21.3 inches
G BB CENTER TO TOPTUBE CENTER	341 mm 13.4 inches	363 mm 14.3 inches	404 mm 15.9 inches	434 mm 17.1 inches
H CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
I BB OFFSET	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches
J STANDOVER HEIGHT	722 mm 28.4 inches	739 mm 29.1 inches	771 mm 30.4 inches	798 mm 31.4 inches
WHEELBASE	1043 mm 41.1 inches	1044 mm 41.1 inches	1055 mm 41.5 inches	1061 mm 41.8 inches
STEM LENGTH	75 mm	75 mm	90 mm	100 mm

## ATACAMA SPORT MEN




	S	M	L	XL
A HEAD TUBE ANGLE	70.5°	71.0°	71.5°	72.0°
B HEADTUBE LENGTH	175 mm 6.9 inches	189 mm 7.4 inches	215 mm 8.5 inches	240 mm 9.4 inches
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 inches	565 mm 22.2 inches	575 mm 22.6 inches	590 mm 23.2 inches
E SEAT TUBE ANGLE	73.5°	73.0°	72.5°	72.5°
F BB CENTER TO TOP OF SEATTUBE	420 mm 16.5 inches	460 mm 18.1 inches	500 mm 19.7 inches	540 mm 21.3 inches
G BB CENTER TO TOPTUBE CENTER	320 mm 12.6 inches	353 mm 13.9 inches	393 mm 15.5 inches	434 mm 17.1 inches
H CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
I BB OFFSET	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches	-56 mm -2.2 inches
J STANDOVER HEIGHT	729 mm 28.7 inches	755 mm 29.7 inches	792 mm 31.2 inches	826 mm 32.5 inches
WHEELBASE	1059 mm 41.7 inches	1063 mm 41.9 inches	1074 mm 42.3 inches	-
STEM LENGTH	75 mm	90 mm	100 mm	100 mm

## ATACAMA SPORT LADY

	S	M	L
A HEAD TUBE ANGLE	69.5°	70.0°	70.5°
B HEADTUBE LENGTH	145 mm 5.7 inches	160 mm 6.3 inches	185 mm 7.3 inches
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 inches	565 mm 22.2 inches	575 mm 22.6 inches
D SEAT TUBE ANGLE	73.5°	73.0°	72.5°
E BB CENTER TO TOP OF SEATTUBE	420 mm 16.5 inches	460 mm 18.1 inches	500 mm 19.7 inches
F BB CENTER TO TOPTUBE CENTER	240 mm 9.4 inches	240 mm 9.4 inches	240 mm 9.4 inches
G CHAINSTAY LENGTH	456 mm 18.0 inches	456 mm 18.0 inches	456 mm 18.0 inches
H BB OFFSET	-60 mm -2.4 inches	-60 mm -2.4 inches	-60 mm -2.4 inches
I STANDOVER HEIGHT	644 mm 25.4 inches	649 mm 25.6 inches	668 mm 26.3 inches
WHEELBASE	1076 mm 42.4 inches	1081 mm 42.6 inches	1081 mm 42.6 inches
STEM LENGTH	70 mm	80 mm	90 mm





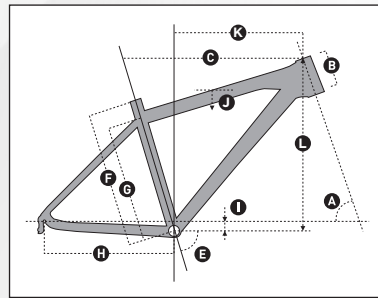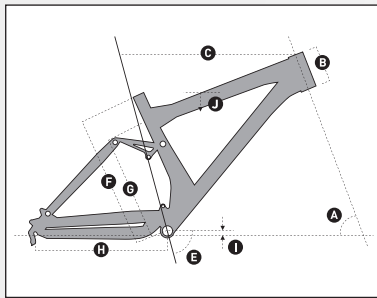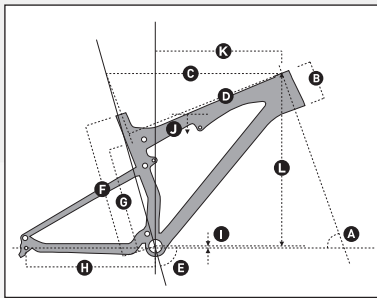

## CONTESSA SPARK CARBON 29"

	S LOW BB setting	S HIGH BB setting	M LOW BB setting	M HIGH BB setting	L LOW BB setting	L HIGH BB setting
A HEAD TUBE ANGLE	69.5°	70.1°	69.5°	70.1°	69.5°	70.1°
B HEADTUBE LENGTH	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	115 mm 4.5 in	115 mm 4.5 in
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 in	548 mm 21.6 in	580 mm 22.8 in	578 mm 22.7 in	610 mm 24.0 in	608 mm 23.9 in
D TOPTUBE LENGTH ACTUAL	518 mm 20.4 in	518 mm 20.4 in	539 mm 21.2 in	539 mm 21.2 in	566 mm 22.3 in	566 mm 22.3 in
E SEAT TUBE ANGLE	72.5°	73.1°	72.5°	73.1°	72.5°	73.1°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 in	400 mm 15.7 in	440 mm 17.3 in	440 mm 17.3 in	481 mm 18.9 in	481 mm 18.9 in
G BB CENTER TO TOPTUBE CENTER	335 mm 13.2 in	335 mm 13.2 in	350 mm 13.8 in	350 mm 13.8 in	403 mm 15.9 in	403 mm 15.9 in
H CHAINSTAY LENGTH	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in
I BB OFFSET	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in
J BB HEIGHT	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in
STANDOVER HEIGHT	762 mm 30.0 in	758 mm 29.8 in	768 mm 30.2 in	764 mm 30.1 in	806 mm 31.7 in	802 mm 31.6 in
WHEELBASE	1082 mm 42.6 in	1082 mm 42.6 in	1112 mm 43.8 in	1112 mm 43.8 in	1143 mm 45.0 in	1143 mm 45.0 in
K REACH	396 mm 15.2 in	379 mm 14.9 in	416 mm 16.4 in	409 mm 16.1 in	442 mm 17.4 in	436 mm 17.2 in
L STACK	602 mm 23.7 in	606 mm 23.9 in	602 mm 23.7 in	606 mm 23.9 in	611 mm 24.1 in	615 mm 24.2 in
STEM LENGTH	70 mm	70 mm	80 mm	80 mm	90 mm	90 mm

SCOTT SUMMER 2013  
SERVICE



## CONTESSA SPARK ALLOY 29"

	S LOW BB setting	S HIGH BB setting	M LOW BB setting	M HIGH BB setting	L LOW BB setting	L HIGH BB setting
A HEAD TUBE ANGLE	69.5°	70.1°	69.5°	70.1°	69.5°	70.1°
B HEADTUBE LENGTH	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	105 mm 4.1 in	115 mm 4.5 in	115 mm 4.5 in
C TOPTUBE LENGTH HORIZONTAL	550 mm 21.7 in	548 mm 21.6 in	580 mm 22.8 in	578 mm 22.7 in	610 mm 24.0 in	608 mm 23.9 in
E SEAT TUBE ANGLE	72.5°	73.1°	72.5°	73.1°	72.5°	73.1°
F BB CENTER TO TOP OF SEATTUBE	400 mm 15.7 in	400 mm 15.7 in	440 mm 17.3 in	440 mm 17.3 in	481 mm 18.9 in	481 mm 18.9 in
G BB CENTER TO TOPTUBE CENTER	335 mm 13.2 in	335 mm 13.2 in	350 mm 13.8 in	350 mm 13.8 in	403 mm 15.9 in	403 mm 15.9 in
H CHAINSTAY LENGTH	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in	448 mm 17.6 in
I BB OFFSET	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in	-41 mm -1.6 in	-48 mm -1.9 in
J BB HEIGHT	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in	324 mm 12.8 in	317 mm 12.5 in
STANDOVER HEIGHT	762 mm 30.0 in	758 mm 29.8 in	768 mm 30.2 in	764 mm 30.1 in	806 mm 31.7 in	802 mm 31.6 in
WHEELBASE	1082 mm 42.6 in	1082 mm 42.6 in	1112 mm 43.8 in	1112 mm 43.8 in	1143 mm 45.0 in	1143 mm 45.0 in
K REACH	386 mm 15.2 in	379 mm 14.9 in	416 mm 16.4 in	409 mm 16.1 in	442 mm 17.4 in	436 mm 17.2 in
L STACK	602 mm 23.7 in	606 mm 23.9 in	602 mm 23.7 in	606 mm 23.9 in	611 mm 24.1 in	615 mm 24.2 in
STEM LENGTH	70 mm	70 mm	80 mm	80 mm	90 mm	90 mm

## CONTESSA GENIUS 700



	S LOW POSITION		S HIGH POSITION		M LOW POSITION		M HIGH POSITION		L LOW POSITION		L HIGH POSITION	
A HEAD TUBE ANGLE	67.7°		68.2°		67.7°		68.2°		67.7°		68.2°	
B HEADTUBE LENGTH	100.0 mm	3.9 inches	100.0 mm	3.9 inches	110.0 mm	4.3 inches	110.0 mm	4.3 inches	120.0 mm	4.7 inches	120.0 mm	4.7 inches
C TOPTUBE LENGTH HORIZONTAL	550.0 mm	21.7 inches	550.0 mm	21.7 inches	580.0 mm	22.8 inches	580.0 mm	22.8 inches	605.0 mm	23.8 inches	605.0 mm	23.8 inches
E SEAT TUBE ANGLE	73.8°		74.3°		73.8°		74.3°		73.8°		74.3°	
F BB CENTER TO TOP OF SEATTUBE	415.0 mm	16.3 inches	415.0 mm	16.3 inches	440.0 mm	17.3 inches	440.0 mm	17.3 inches	475.0 mm	18.7 inches	475.0 mm	18.7 inches
H CHAINSTAY LENGTH	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches	440 mm	17.3 inches
I BB OFFSET	-10.0 mm	-0.4 inches	-4.0 mm	-0.2 inches	-10.0 mm	-0.4 inches	-4.0 mm	-0.2 inches	-10.0 mm	-0.4 inches	-4.0 mm	-0.2 inches
J BB HEIGHT	346.0 mm	13.6 inches	352.0 mm	13.9 inches	346.0 mm	13.6 inches	352.0 mm	13.9 inches	346.0 mm	13.6 inches	352.0 mm	13.9 inches
G STANDOVER HEIGHT	776.0 mm	30.6 inches	776.0 mm	30.6 inches	777.0 mm	30.6 inches	777.0 mm	30.6 inches	809.0 mm	31.9 inches	809.0 mm	31.9 inches
L WHEELBASE	1104 mm	43.5 inches	1104 mm	43.5 inches	1135 mm	44.7 inches	1135 mm	44.7 inches	1161 mm	45.7 inches	1161 mm	45.7 inches
M REACH	379.0 mm	14.9 inches	384.0 mm	15.1 inches	407.0 mm	16.0 inches	411.0 mm	16.2 inches	429.0 mm	16.9 inches	434.0 mm	17.1 inches
N STACK	590.0 mm	23.2 inches	587.0 mm	23.1 inches	599.0 mm	23.6 inches	596.0 mm	23.5 inches	609.0 mm	24.0 inches	605.0 mm	23.8 inches
STEM LENGTH	60		60		70		70		80		80	

## CONTESSA SCALE 29"

	S		M		L	
A HEAD TUBE ANGLE	69.5°		69.5°		69.5°	
B HEADTUBE LENGTH	105 mm	4.1 inches	115 mm	4.5 inches	125 mm	4.9 inches
C TOPTUBE LENGTH HORIZONTAL	565 mm	22.2 inches	575 mm	22.6 inches	595 mm	23.4 inches
E SEAT TUBE ANGLE	72.5°		72.5°		72.5°	
F BB CENTER TO TOP OF SEATTUBE	370 mm	14.6 inches	410 mm	16.1 inches	460 mm	18.1 inches
G BB CENTER TO TOPTUBE CENTER	315 mm	12.4 inches	355 mm	14.0 inches	405 mm	15.9 inches
H CHAINSTAY LENGTH	450 mm	17.7 inches	450 mm	17.7 inches	450 mm	17.7 inches
I BB OFFSET	-60 mm	-2.4 inches	-60 mm	-2.4 inches	-60 mm	-2.4 inches
BB HEIGHT	310 mm	12.2 inches	310 mm	12.2 inches	310 mm	12.2 inches
J STANDOVER HEIGHT	749 mm	29.5 inches	778 mm	30.6 inches	810 mm	31.9 inches
WHEELBASE	1064 mm	41.9 inches	1071.8 mm	42.2 inches	1092 mm	43.0 inches
K REACH	370 mm	14.6 inches	380 mm	15.0 inches	397 mm	15.6 inches
L STACK	618 mm	24.3 inches	628 mm	24.7 inches	638 mm	25.1 inches
STEM LENGTH	70 mm		80 mm		90 mm	

## CONTESSA ACTIVE ALLOY HARDTAIL

	XS		S		M		L		XL	
A HEAD TUBE ANGLE	69.0°		69.5°		70.0°		70.0°		70.5°	
B HEADTUBE LENGTH	100 mm	3.9 inches	110 mm	4.3 inches	120 mm	4.7 inches	135 mm	5.3 inches	150 mm	5.9 inches
C TOPTUBE LENGTH HORIZONTAL	540 mm	21.3 inches	545 mm	21.5 inches	555 mm	21.9 inches	565 mm	22.2 inches	575 mm	22.6 inches
E SEAT TUBE ANGLE	74.0°		73.5°		73.0°		73.0°		73.0°	
F BB CENTER TO TOP OF SEATTUBE	330 mm	13.0 inches	370 mm	14.6 inches	410 mm	16.1 inches	460 mm	18.1 inches	510 mm	20.1 inches
G BB CENTER TO TOPTUBE CENTER	280 mm	11.0 inches	320 mm	12.6 inches	360 mm	14.2 inches	410 mm	16.1 inches	460 mm	18.1 inches
H CHAINSTAY LENGTH	430 mm	16.9 inches	430 mm	16.9 inches	430 mm	16.9 inches	430 mm	16.9 inches	430 mm	16.9 inches
I BB OFFSET	32 mm	1.3 inches	32 mm	1.3 inches	30 mm	1.3 inches	32 mm	1.3 inches	32 mm	1.3 inches
J STANDOVER HEIGHT	699 mm	27.5 inches	718 mm	28.3 inches	738 mm	29.1 inches	758 mm	29.8 inches	778 mm	30.6 inches
WHEELBASE	1049 mm	41.3 inches	1045 mm	41.1 inches	1045 mm	41.1 inches	1056 mm	41.6 inches	1061 mm	41.8 inches
STEM LENGTH	60 mm		75 mm		75 mm		90 mm		90 mm	

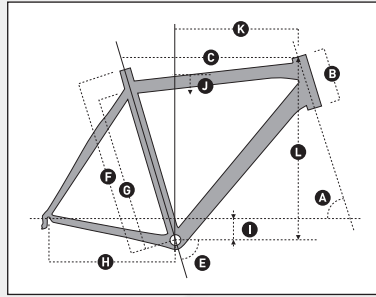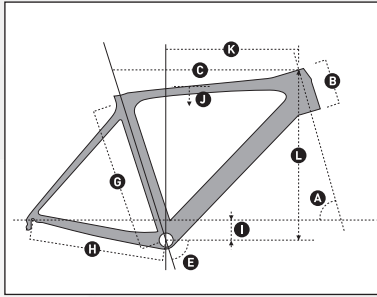

## CONTESSA FOIL

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	73.0°	73.0°
B HEADTUBE LENGTH	100 mm 3.9 inches	105 mm 4.1 inches	120 mm 4.7 inches	140 mm 5.5 inches	160 mm 6.3 inches
C TOPTUBE LENGTH HORIZONTAL	510 mm 20.1 inches	520 mm 20.5 inches	535 mm 21.1 inches	550 mm 21.7 inches	565 mm 22.2 inches
E SEAT TUBE ANGLE	74.5°	74.5°	74.0°	73.3°	73.3°
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	717 mm 28.2 inches	731 mm 28.8 inches	755 mm 29.7 inches	775 mm 30.5 inches	794 mm 31.3 inches
K REACH	371 mm 14.6 inches	379 mm 14.9 inches	384 mm 15.1 inches	385 mm 15.2 inches	394 mm 15.5 inches
L STACK	503 mm 19.8 inches	509 mm 20.0 inches	527 mm 20.7 inches	549 mm 21.6 inches	569 mm 22.4 inches
STEM LENGTH	60 mm	70 mm	90 mm	100 mm	110 mm

## CONTESSA CR1

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	73.0°	73.0°	73.0°
B HEADTUBE LENGTH	111 mm 4.4 inches	116 mm 4.6 inches	136 mm 5.4 inches	156 mm 6.1 inches	176 mm 6.9 inches
C TOPTUBE LENGTH HORIZONTAL	505 mm 19.9 inches	515 mm 20.3 inches	530 mm 20.9 inches	545 mm 21.5 inches	560 mm 22.0 inches
E SEAT TUBE ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°
F BB CENTER TO TOP OF SEATTUBE	470 mm 18.5 inches	490 mm 19.3 inches	520 mm 20.5 inches	540 mm 21.3 inches	560 mm 22.0 inches
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	723 mm 28.5 inches	737 mm 29.0 inches	765 mm 30.1 inches	784 mm 30.9 inches	803 mm 31.6 inches
K REACH	368 mm 14.5 inches	376 mm 14.8 inches	379 mm 14.9 inches	383 mm 15.1 inches	387 mm 15.2 inches
L STACK	513 mm 20.2 inches	519 mm 20.4 inches	545 mm 21.5 inches	565 mm 22.2 inches	584 mm 23.0 inches
STEM LENGTH	60 mm	70 mm	90 mm	100 mm	110 mm

## CONTESSA SPEEDSTER

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	73.0°	73.0°	73.0°
B HEADTUBE LENGTH	111 mm 4.4 inches	116 mm 4.6 inches	136 mm 5.4 inches	156 mm 6.1 inches	176 mm 6.9 inches
C TOPTUBE LENGTH HORIZONTAL	505 mm 19.9 inches	515 mm 20.3 inches	530 mm 20.9 inches	545 mm 21.5 inches	560 mm 22.0 inches
E SEAT TUBE ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°
F BB CENTER TO TOP OF SEATTUBE	470 mm 18.5 inches	490 mm 19.3 inches	520 mm 20.5 inches	540 mm 21.3 inches	560 mm 22.0 inches
G BB CENTER TO TOPTUBE CENTER	410 mm 16.1 inches	430 mm 16.9 inches	460 mm 18.1 inches	480 mm 18.9 inches	500 mm 19.7 inches
H CHAINSTAY LENGTH	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches	405 mm 15.9 inches
I BB OFFSET	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches	-67 mm -2.6 inches
J STANDOVER HEIGHT	722 mm 28.4 inches	736 mm 29.0 inches	763 mm 30.0 inches	782 mm 30.8 inches	802 mm 31.6 inches
K REACH	368 mm 14.5 inches	376 mm 14.8 inches	379 mm 14.9 inches	383 mm 15.1 inches	387 mm 15.2 inches
L STACK	513 mm 20.2 inches	519 mm 20.4 inches	545 mm 21.5 inches	565 mm 22.2 inches	584 mm 23.0 inches
STEM LENGTH	60 mm	70 mm	90 mm	100 mm	110 mm



# SIZECHART

	-165 CM	165 - 175 CM	175 - 185 CM	185 - 195 CM	195CM -
VOLTAGE	XS	M	L	XL	
ASPECT	XS	S	L	XL	XXL
CONTESSA SPORT	XS	M	L	XL	
SCALE, CONTESSA SCALE	XS	S	L	XL	XXL
GENIUS, SPARK, CONTESSA GENIUS, CONTESSA SPARK		S	M	L	XL
GENIUS LT		S	M	L	
VOLTAGE FR		SHORT		LONG	
GAMBLER		S	M	L	XXL
SUB MEN, SPORTSTER MEN, VENTURE MEN		S	M	L	XXL
SUB SOLUTION, SPORTSTER SOLUTION, E-VENTURE SOLUTION		S	M	L	XXL
CONTESSA ROAD	XXS/47	S/52	M/54	L/56	
ROAD, PLASMA 2	XXS/47	S/52	M/54	L/56	XXL/61
PLASMA 3, PLASMA TT		S/52	M/54	L/56	
CYCLOCROSS	XS/49	S/52	M/54	L/56	XL/58

