


Example detection-power simulation, 3 + 3 design

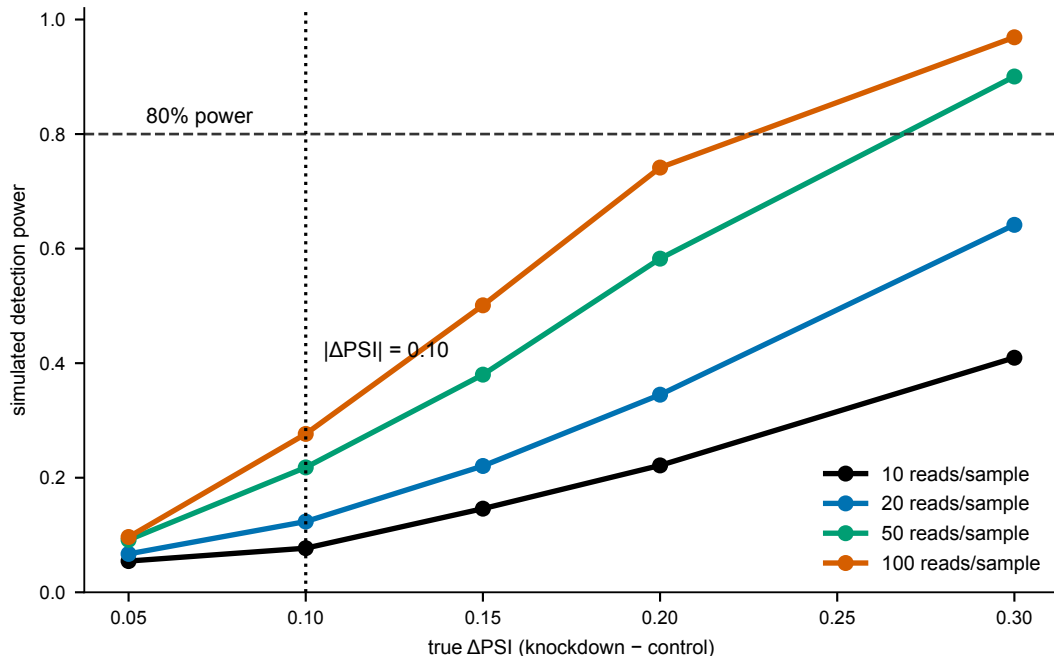

Simulation assumptions (an example, not the rMATS analysis)

- three versus three replicates; replicate PSI drawn from a normal distribution around $0.5 \pm \Delta$ PSI/2, between-replicate SD 0.05, limited to 0.01–0.99
- binomial read sampling at a fixed depth of 10, 20, 50 or 100 informative reads per sample
- two-sample t test (equal variances) on PSI; a hit is $p < 0.05$ without multiple-testing correction
- 2,000 simulations per point; no FDR correction and no $|\Delta$ PSI ≥ 0.10 threshold