

Computer Network.

SEM 2025-2026

Galala University

Mahros Mohamed Mahros AL-Qabasy

223106831

Contents


Part. 02	1
Part. 03	2

*“Step by Step
solution!”*

Part. 02

Step. 01, 02, 03

Creating *topology*

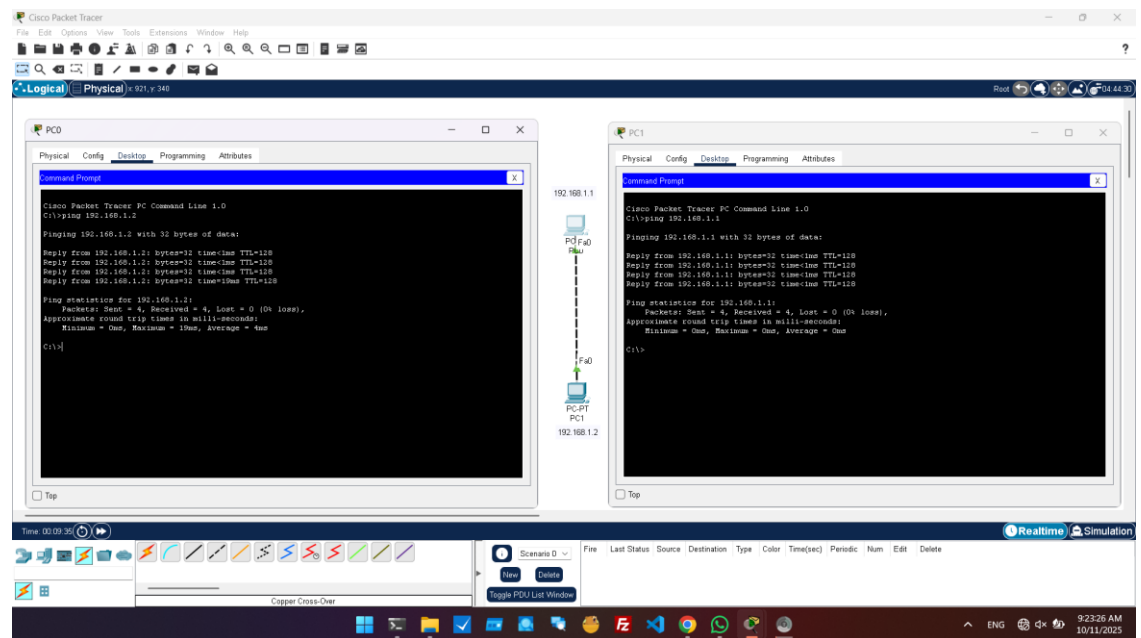


*"I have used CLI
instead of Router
GUI!"*

Part. 03


Step. 01

Configuring Router and PCs

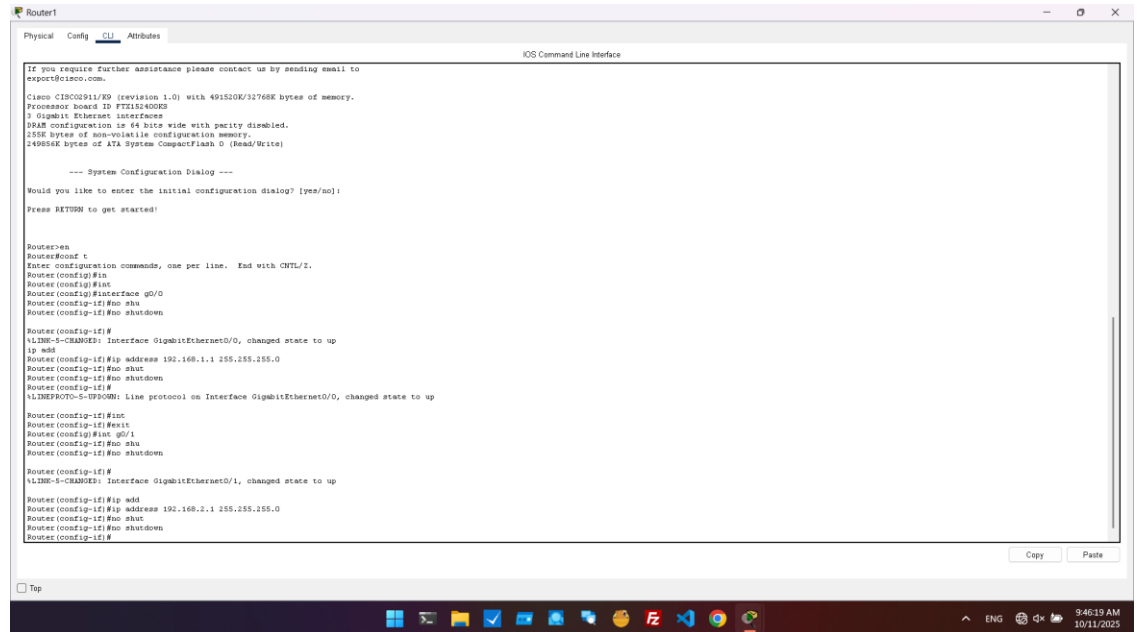

Step. 02, 03, 04

Testing PCs and Router

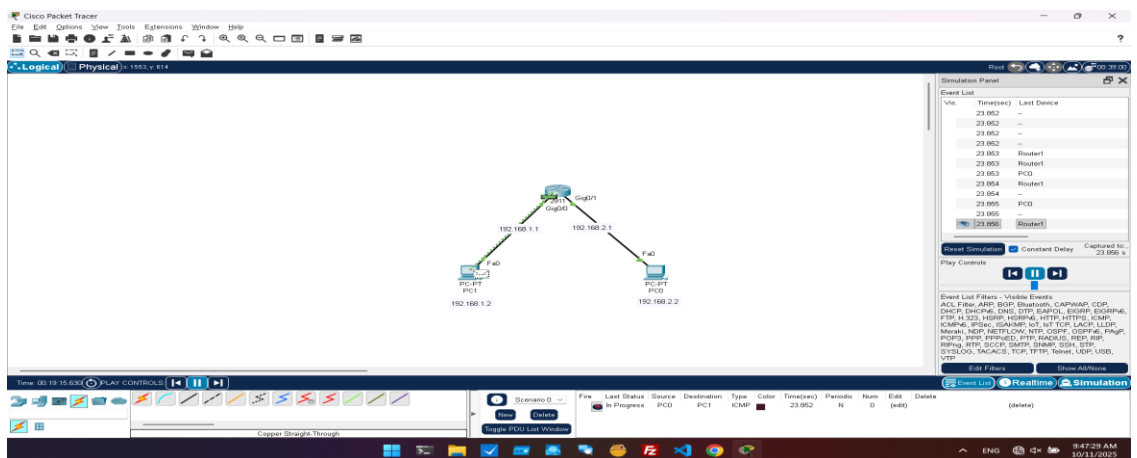

Answer

Will the message be received?

No, The Message will not Received.

Reasons:

- Different Network Addresses Ranges: 192.168.1.2, 192.168.2.2
- Also, the switch is working in layer2, mac address, so we have can't route through ip addresses.

Fix.

- Make them in the same subnet or same network:
192.168.[1].2 to 254
- Or, I see that we can add layer three switch

Thanks!