

# HIGHLIGHTS

- Available in 4", 5-6" & 8"
- Energy Star Qualified
- ETL Listed
- Wet Location Rated
- 120-277V Volt Input
- Dimmable (@120V)
- Baffle Trim Look
- Compact Sleek Design
- Type IC Airtight & Non IC Airtight Application

# LUXRITE LED

ROUND  
JUNCTION  
BOX  
DOWNLIGHT  
RETROFIT





3 Year  
Warranty



# LUXRITE

## SPECIFICATIONS

MODEL	BASE	AVERAGE LIFETIME	INPUT VOLTS	POWER FACTOR	DIMMABLE	MERCURY FREE	WET LOCATION	ENERGY STAR	ETL
ALL	Junction Box	50000hrs (45.7yrs)	120-277V	>0.9	● (at 120V)	●	●		

8 INCH 5-6 INCH 4 INCH

MODEL	DESCRIPTION	WATT	LUMENS	COLOR TEMPERATURE		DIAMETER	FLOOD	CASE	CRI	LUMEN EFFICACY
LR24840	LED/DL4/2700K/FL/JB	10	700	2700K	WARM WHITE	128MM	100°	12	90	70.0
LR24841	LED/DL4/3000K/FL/JB	10	750	3000K	SOFT WHITE	128MM	100°	12	90	75.0
LR24842	LED/DL4/4000K/FL/JB	10	780	4000K	COOL WHITE	128MM	100°	12	90	78.0
LR24843	LED/DL4/5000K/FL/JB	10	800	5000K	BRIGHT WHITE	128MM	100°	12	90	80.0
LR24845	LED/DL5-6/2700K/FL/JB	15	1000	2700K	WARM WHITE	186MM	100°	12	90	66.7
LR24846	LED/DL5-6/3000K/FL/JB	15	1000	3000K	SOFT WHITE	186MM	100°	12	90	66.7
LR24847	LED/DL5-6/4000K/FL/JB	15	1050	4000K	COOL WHITE	186MM	100°	12	90	70.0
LR24848	LED/DL5-6/5000K/FL/JB	15	1100	5000K	BRIGHT WHITE	186MM	100°	12	90	73.3
LR24850	LED/DL8/2700K/FL/JB	25	1950	2700K	WARM WHITE	230MM	90°	6	80	78
LR24851	LED/DL8/3000K/FL/JB	25	2000	3000K	SOFT WHITE	230MM	90°	6	80	80.0
LR24852	LED/DL8/4000K/FL/JB	25	2100	4000K	COOL WHITE	230MM	90°	6	80	84.0
LR24853	LED/DL8/5000K/FL/JB	25	2200	5000K	BRIGHT WHITE	230MM	90°	6	80	88.0

## THREE IN ONE

No Assembly Required



Remodel Can




Trim



Bulb

# LUXRITE

## INSTALLATION

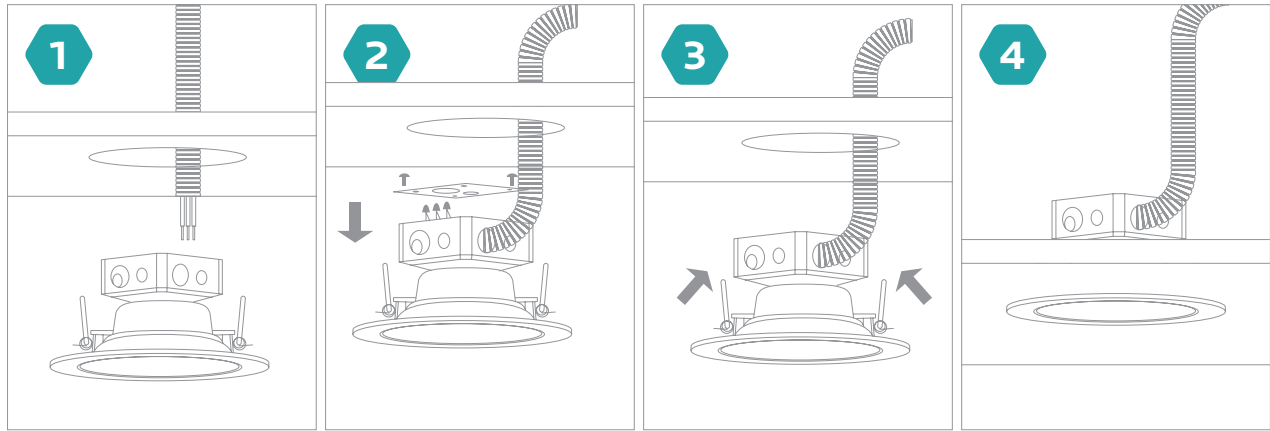

## DIMENSIONS

