

# VX100DGB



Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Black

Weight: 3.0 lbs

Project:

Type:

Prepared By:

Date:

## Lamp Info

Type: A21  
Watts: 150W  
Shape/Size: N/A  
Base: N/A  
ANSI: N/A  
Hours: N/A  
Lamp Lumens: N/A  
Efficacy: N/A

## Ballast Info

Type: N/A  
120V: N/A  
208V: N/A  
240V: N/A  
277V: N/A  
Input Watts: 0W

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

### Construction

#### Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.

#### Die Cast Guard:

Supplied with one piece black die cast guard with set screw

### Electrical

#### Maximum Watts:

150 watts

#### Colored Globe Maximum Watts:

100 watts

#### Input Voltage:


120V

### Other

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

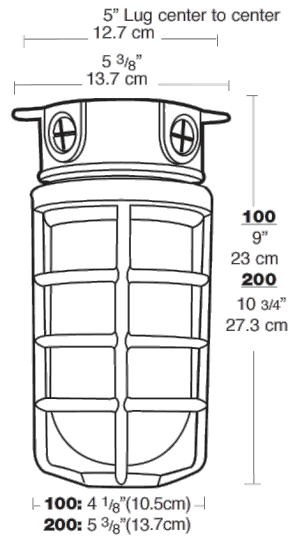

## Features

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

Junction box with sturdy mounting lugs

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads