16*10/100Base-TX Industrial PoE Switch

LT-IS6016FP-16TX



Features:

- 16*10/100Base-TX RJ45 PoE ports (No.16 is the uplink port when the port isolation enabled)
- DC 44-57V input, redundant power supply with polarity reverse protection
- Support one output relay alarm(terminal block Pin 5/6)
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Dip switch function:

  1.Port isolation; 2. 250m long distance; 3. QoS (1-2 ports); 4. PoE watchdog
- Support 10K Bytes Jumbo frame
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IS6016FP-16TX is the unmanaged industrial grade Ethernet switch with 16-port 10/100Base-TX RJ45 PoE. It complies with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. Moreover, it is featuring with port isolation, 250m long distance transmission mode, QoS (1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel.

LT-IS6016FP-16TX is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 44-57VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications.


Technical specification

<table>
<tr><td>Model No.</td><td colspan="3">LT-IS6016FP-16TX</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber port</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>0</td><td colspan="2">16</td></tr>
<tr><td>Ethernet</td><td colspan="3">16*10/100Base-TX RJ45 PoE</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.3af Power-Over-Ethernet
IEEE 802.3at Power Over Ethernet plus PSE</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port Isolation
2. 250m long distance mode
3. QoS(1-2 ports)
4. PoE watchdog</td></tr>
<tr><td rowspan="6">LED Indicators</td><td rowspan="2">P (Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="3">S (System indicator) Red</td><td colspan="2">Off: total PoE usage < rated 50%</td></tr>
<tr><td colspan="2">Blinking: rated 50% < total PoE usage < rated 90%</td></tr>
<tr><td colspan="2">On: total PoE usage ≥rated 90%</td></tr>
<tr><td rowspan="2">1-16(Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: PoE not working</td></tr>
</table>

		On: ports link up Blinking: data on TX/RX	On: PoE working
Power parameters			
Input voltage	44-57VDC, redundant power input		
Input current	0.7A Max		
Total power consumption	Full loading without PoE ≤8W PoE power budget ≤240W		
Connector	Removable 6-pin terminal block		
Reverse polarity protection	Support		
Over-current protection	Support		
Switching features			
Switching capacity	3.2G		
Packet forwarding rate	4.76 Mpps		
MAC address table	8K		
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096		
Buffer	2Kbits		
Forwarding delay	<100us		
Jumbo Frame	Support 10Kbytes		
MDI/MDIX	Support		
Watchdog	Support		
Network Topology			
Star topology	Support		
Bus topology	Support		
Tree Topology	Support		
Mechanical structure			
Case protection	IP40		
Installation method	Din-rail		
Dimension(W*D*H)mm	54x158x115mm		
Weight	1.3 kg		
Operating environment			

Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	EMI：FCC Part 15B Class A
	Surge protection of power: IEC 61000-4-5　6KV/4KV（8/20us）
	Surge protection of Ethernet ports：IEC 61000-4-5　6KV/2KV（10/700us）
	RS: IEC 61000-4-3 80 MHz-1 GHz：10 V/m
	EFT: IEC 61000-4-4　power interface: 4K；Ethernet ports: 2K
	CS: IEC 61000-4-6 10V
	ESD: IEC 61000-4-2　Level 4（8K/15K）
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

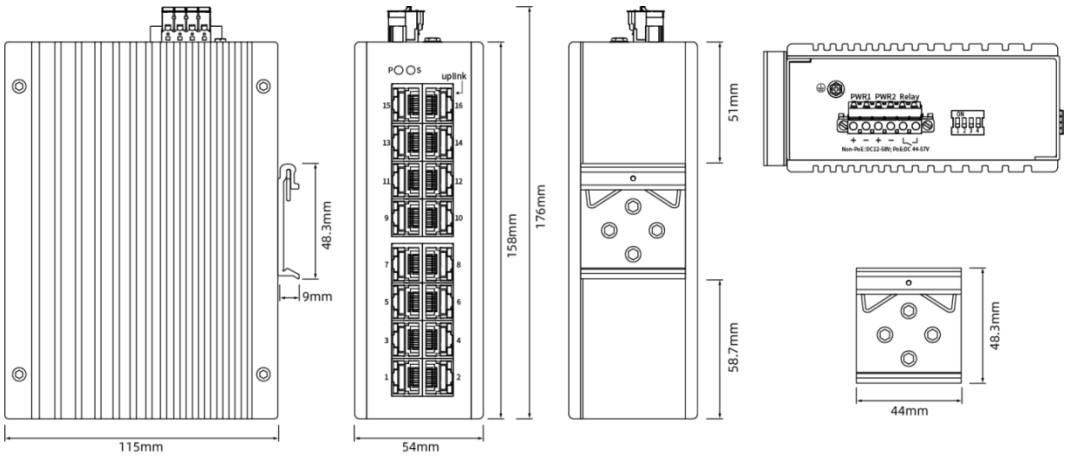

Order information

Model	Description
LT-IS6016FP-16TX	Unmanaged industrial PoE switch with 16*10/100Base-TX PoE ports, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃