16*10/100/1000Base-T PoE + 2*1000Base-X

Industrial PoE Switch

LT-IS6018GP-2GX16GT



Features:

- 16*10/100/1000Base-T RJ45 PoE ports, 2*1000Base-X SFP slots
- DC 44-57V input, redundant power supply with polarity reverse protection
- Support one channel output relay alarm(terminal block Pin 5/6)
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Support powerful Dip switch function:

  1.Link aggregation; 2. 250m long distance (1-4 ports); 3. QoS (1-2 ports); 4. PoE watchdog
- Support 10K Bytes Jumbo frame
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75 ℃

Overview

The SmartByte LT-IS6018GP-2GX16GT is the highly reliable industrial PoE switch with 16-port 10/100/1000-T PoE and 2-port 1000Base-X SFP slots. It complies with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. Moreover, it is also featuring with link aggregation, 250m long distance transmission mode (1-4 ports), QoS (1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel

LT-IS6018GP-2GX16GT is a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 44-57VDC, redundant power design with polarity reverse/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and crucial.


Technical specification

Model No.	LT-IS6018GP-2GX16GT	
Interface	Fiber ports	Copper RJ45 ports
	2	16
Ethernet	16*10/100/1000Base-T PoE 2*1000Base-X SFP	
Alarm port	One relay output for power failure. Alarm relay current carry ability: 1A@24VDC	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af Power-Over-Ethernet IEEE 802.3at Power Over Ethernet plus PSE	
Dip Switch	1. Link aggregation 2. 250m long distance mode (1-4 ports) 3. QoS(1-2 ports) 4. PoE watchdog	
LED Indicators		
P(Power indicator) Green	Off: the device is power off or failed	
	On: the device power on is normal	
S(PoE usage indicator) Red	Off: total PoE usage < rated 50%	
	Blinking: rated 50% < total PoE usage < rated 90%	

	Normal on: total PoE usage ≥rated 90%	
1-16 (Copper ports)	Green indicators	Yellow indicators
	Off: ports link down	Off: PoE not working
	On: ports link up	On: PoE working
	Blinking: receiving data	
17-18 (Fiber ports) Green	Off: ports link down	
	On: ports link up	
	Blinking: receiving data	
Power parameters		
Input voltage	44-57VDC, redundant power input	
Input current	5.7A Max	
Total power consumption	Full loading without PoE ≤10W PoE power budget ≤240W	
Connector	Removable 6-pin terminal block, pin 5/6 for relay alarm output	
Reverse polarity protection	Support	
Over-current protection	Support	
Switching features		
Switching capacity	36G	
Packet forwarding rate	53.5Mpps	
MAC address table	8K	
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096	
Buffer	2M	
Forwarding delay	<5us	
Jumbo Frame	Support 10Kbytes	
MDI/MDIX	Support	
Watchdog	Support	
Network Topology		
Star topology	Support	
Bus topology	Support	
Tree Topology	Support	

Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H) mm	54*115*158mm
Weight	1.43 Kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industry standard	EMI：FCC Part 15B Class A
	Surge protection of power: IEC 61000-4-5 6KV/4KV（8/20us）
	Surge protection of Ethernet ports：IEC 61000-4-5 6KV/2KV（10/700us）
	RS: IEC 61000-4-3 80 MHz-1 GHz：10 V/m
	EFT: IEC 61000-4-4 power interface: 4K；Ethernet ports: 2K
	CS: IEC 61000-4-6 10V
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

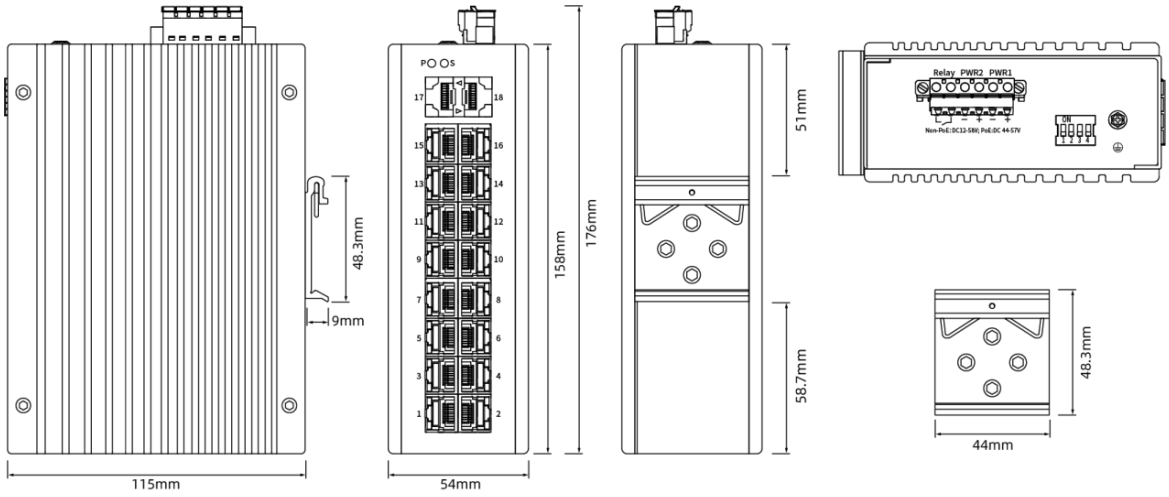

Order information

Model	Description
LT-IS6018GP-2GX16GT	Industrial PoE switch with 16*10/100/1000Base-T RJ45 PoE ports and 2*1000Base-X SFP slots, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃