24*10/100/1000Base-T + 4*1G/2.5G/10G SFP +

Layer 3 Managed PoE++ Switch

LT-S8528XGP-4XS24GT-4BT Series

Overview:

SmartByte LT-S8528XGP-4XS24GT-4BT series are the Layer 3 Managed PoE Switch that provides high-density performance, Layer 3 static and dynamic routing, RIP (Routing Information Protocol) and OSPF (Open Shortest Path First). They deliver full Gigabit access and unparalleled scalability to 10G performance. The LT-S8528XGP-4XS24GT-4BT series provide comprehensive end to end QoS as well as flexible and rich management, security settings, which can meet the high speed, secure and smart requirement for small and medium-size enterprise networks based on cost effective price. The powerful network security features also make the LT-S8528XGP-4XS24GT-4BT series perform effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications. Complying with IEEE 802.3af/at/bt full PoE standards, they deliver a maximum 740W PoE budget. Ports 1–4 support 90W PoE++ for high-power IoT terminals, while the remaining ports support standard PoE/PoE+. Built-in PoE scheduling, watchdog and over-current protection guarantee intelligent and safe power supply, which can be widely deployed in HD surveillance, high-density Wi-Fi 6 networking, smart building automation, and enterprise unified communication systems

Picture



Features

- 4*1G/2.5G/10G SFP+ slots uplink, 24*10/100/1000BASE-T PoE ports downlink, 1*RJ45 console interface for switch basic management and setup.
- Complies with IEEE 802.3at, IEEE802.3af and IEEE802.3bt standard. 1-4 ports support PoE++ 90W per port. Max PoE output budget 740W
- **Hardware:** Marvell AC5 series 1.2GHz CPU, Marvell AC5 series switch chipsets, 1GB RAM and 512MB flash
- **Layer 3 features:** IPv4/IPv6 static routing, DHCPv4/ DHCPv6 client, DHCPv4 relay, DHCP relay; Supports ECMP, VRRP, RIP, OSPF, BGP4, IS-IS; 13K routing entries
- **Port features:** Supports port aggregation, IEEE802.3x flow control, port isolation, port mirroring, loop detection and broadcast storm suppression
- **VLAN:** Supports IEEE802.1Q tagged VLAN, mac based VLAN, IP based VLAN, protocol based VLAN, voice VLAN and private VLAN.
- **QinQ:** Supports port-based, VLAN-based and flow-based QinQ
- Supports **GVRP/LLDP/SPAN/RSPAN/DHCPv4 snooping**
- **Layer 2 ring network protocol:** Supports STP, RSTP, MSTP, G.8032 ERPS protocol, single ring, sub ring
- **Multicast:** IGMP snooping, IGMP v1, v2, v3, PIM-SM
- **QoS:** QoS class, remarking, Supports SP, WRR queue scheduling, Ingress/Egress port-based rate-limit and policy-based QoS
- **Security:** Supports ACL, 802.1x， port-security, IP source guard, ARP-check, DAI, anti-gateway ARP spoofing, Ddos attack protection, telnet/SSH/HTTP/HTTPS user access control and AAA.
- **Reliability:** Loop detect based on port or VLAN, the Ethernet in the first mile 802.3ah
- **Management:** Supports IPv4/IPv6 dual stack management, PoE management, system log management, user management, login service management, firmware management, web management, CLI management, fault detection, DNS, NTP, sFlow, SNMP, MQTT, RMON and dual partition management.
- **Application protocol:** Supports telnet server, telnet client, SCP, SFTP, SSH server, TACACS and TFTP client

Technical Specification

Model No.	LT-S8528XGP-4XS24GT-4BT	
Interface	Fiber ports	Copper RJ45 ports
	4	24
Ethernet	24*10/100/1000Base-T RJ45 PoE 4*1G/2.5G/10GBase-X SFP+	
CPU	Marvell AC5 series 1.2GHz	
Size of RAM	1GB	
Size of Flash	512MB	
Switch chip model	Marvell AC5 series	
Management port	1*RJ45 Console port (115200,8,N,1)	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE 802.3ae 10Gigabit Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP IEEE 802.3af PoE IEEE 802.3at PoE+ IEEE 802.3bt PoE++	
LED Indicators		
PWR (Power indicator)	Off: the device is power off or failed	On: the device power on is normal
SYS (System status indicator)	Blinking: device initialization	On: device on normal operation
1-24 (Copper ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
1-24 (PoE status indicator) Yellow	Off: PoE not working	
	On: PoE working	

25-28 (Fiber ports indicators) Green	Off: ports link down
	On: ports link up
	Blinking: data on TX/RX
Power parameter	
Input voltage	1* AC 100-240V input **on default** 2* AC 100-240V input optional
Total power consumption	Full loading ≤850W
PoE budget	PoE output budget Max 740W; 1-4 ports support PoE++ 90W, 5-24 ports support PoE 15.4W and PoE+ 30W
Over-current protection	Support
Layer 2 switching	
Port aggregation	Support GE port aggregation
	Support 2.5GE aggregation
	Support 10GE aggregation
	Support static aggregation
	Support LACP dynamic aggregation
	Up to 64 aggregation groups and up to 8 ports per group
Port features	Support IEEE802.3x flow control
	Support interface counters
	Support port isolation
	Port mirroring (One-to-One, Many-to-One)
	Support loop detection (Port-based; VLAN-based)
	Support broadcast storm suppression (broadcast; unknown multicast; unknown unicast)
VLAN	IEEE802.1Q tagged VLAN
	Mac based VLAN
	IP based VLAN
	Protocol based VLAN
	Voice VLAN, specially divide VLAN for user voice data flow
	Private VLAN, divide a VLAN broadcast domain into multiple subdomains to form a double-layer VLAN structure
	VLAN range: 1-4094

	Support access mode/trunk mode/hybrid mode
Mac-address table management	Support static Mac-address management
	Support dynamic Mac-address Management
	Support filtering Mac-address
	Support MAC limit based on port and VLAN
	Support MAC flapping based on port and VLAN
	16K Mac-address table size
GVRP	Normal mode
	Fixed mode
	Forbidden mode
QinQ	Port-based QinQ
	VLAN-based QinQ
	VLAN mapping
	Flow-based QinQ
LLDP	Link Layer Discovery Protocol
	Med
SPAN	Number of Sessions: 7
	Many-to-one
RSPAN	Remote Switch Port Analyzer
MSTP	802.1D STP
	802.1W RSTP
	802.1S MSTP
	BPDU Guard
	Number of Single Ring Device Connections: 20
ERPS G.8032	Major ring
	Sub ring
	Recovery time ≤20ms
	Number of Single Ring Device Connections: No limit
QoS	QoS Class, Remarking
	Support SP, WRR Queue Scheduling

	Ingress Port-based Rate-limit
	Egress Port-based Rate-limit
	Egress port-queue shaper
	Policy-based QoS
	Port Queue Numbers: 8
DHCPv4 Snooping	DHCP snooping trust port
	DHCP snooping option-82
	DHCP snooping circuit-id and remote-id customized
L2 Multicast	
IGMP	IGMP v1, v2, v3
IGMP Snooping	Internet Group Management Protocol Snooping
	Fast Leave
	Multicast Table Size: 1K
PIM-SM	Protocol Independent Multicast-Sparse Mode
Security features	
ACL	IP Standard ACL IP Extended ACL MAC extend ACL IPv6 ACL Time Range ACL apply on VLAN ACL entries, include input and output
802.1x	Port access control Mac-address access control RADIUS server
Port-security	Port-security
IP source guard	IP Source Guard, Port-based IP/Mac Binding Access
ARP-check	Support ARP-check and ARP packet filtering for illegal users
DAI	Dynamic ARP Inspection
Anti-gateway ARP Spoofing	Prevent Gateway ARP Spoofing
Ddos	Ddos attack protection
Access control	Support Telnet/SSH/HTTP/HTTPS user access control
AAA	RADIUS authentication access switch


	TACACS authentication access switch
	Authorization
Reliability	
Loop Detect	Loop detect, based on port or VLAN
EFM	The Ethernet in the first mile, 802.3ah
Management & Maintenance functions	
Dual Stack	IPv4 and IPv6 Dual Stack Management
System Log Management	Syslog Level 7 to 0 Corresponding Debug/Info/Notice/Warning/ Err/ Critical/ Alert
	Support connecting up to 3 Servers
	For IPv4 and IPv6
User Management	Support password protection, support MD5/SHA256/SHA512 algorithm
	Local Management of User Privilege
	Remote authorization by RADIUS or TACACS
	Enable privilege protection
	User password complexity requirements
	User login fail protection
	User Privilege Level 0 to 15
Login Service Management	Up to 8 users online simultaneously
	Access control based on IPv4 or IPv6 ACL
Firmware Management	Firmware upgraded by WEB
	Firmware upgraded by CLI
	Dual partition
Web Management	Web Management
	Support HTTP V1.1
	Support HTTPS
	For IPv4 and IPv6
CLI management	Console/Telnet command line management
Fault Detection	Ping/Traceroute, For IPv4 and IPv6
	Dying gasp optional

	Optical transceiver DDM
	One click fault information collection
	Cable detection
DNS	Domain Name System
NTP	Network Time Protocol, For IPv4 and IPv6
	Support domain name configuration
Configuration Import /Export	FTP/TFTP based remote configuration import and export
sFlow	Sampled flow
SNMP	Version SNMPV2C/V3
MQTT	Message Queuing Telemetry Transport
RMON	Support RMON (Remote Monitoring) alarm
PoE management	Support 802.3af/802.3at
	Support PD watchdog
	Support PoE priority management
	Support Max PoE power configuration for each port
	Support alarm threshold configuration
	Support reserved power configuration
	Support PoE schedule
	Support POE legacy mode
Dual partition management	Support dual partition switching
Application Protocol Functions	
Telnet server	Support telnet server for IPv4 and IPv6
Telnet client	Support telnet client for IPv4 and IPv6
SCP (Secure Copy Protocol)	SCP client/server for IPv4 and IPv6
SFTP	sftp client/server for IPv4 and IPv6
SSH server	Support login based on user password-SSH2, support IPv4, IPv6
	Support public key-based login
TACACS	Support TACACS (the terminal access controller accesses the control system)
TFTP	Support TFTP Client
Layer 3 features	

Static Route	Support VLAN interface and route port
	IPv4 static routing table entry configuration
	ARP dynamic learning and static configuration
	IPv6 static routing table entry configuration
	Neighbor discovery and static configuration
	Routing prefix table size 4k for IPv4, for IPv6 divide by 4
DHCPv4 Client	Dynamic host configuration protocol for IPv4
DHCPv6 Client	Dynamic host configuration protocol for IPv6
DHCPv4 Relay	DHCP Relay for IPv4
DHCPv4 Server	DHCP Server for IPv4
ECMP	Support ECMP (Equal-cost multi-path routing)
	Support the configuration of ECMP Max next-hop
	Support capacity balanced configuration
Route policy	IPv4 prefix-list
VRRP	Virtual Router Redundancy Protocol
Routing Protocol Specification	
RIP	RIPv1/v2
OSPFv2	OSPFv2
BGP4	BGP4
	BGP Support Routing Recursive ECMP
	Support to view the number of neighbors and up/down state
IS-IS	IS-ISv4
Routing entries	13K
Switching features	
Switching capacity	128Gbps
Packet forwarding rate	190.4Mpps
MAC address table	16K
VLAN	4K
Buffer	12Mbit
Forwarding delay	<5us

Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
Mechanical structure	
Installation method	Desktop; Rack-mount
Dimension(W*D*H) mm	440*245*44mm
Weight	4.2 kg
Operating environment	
Operating temperature	0℃~ +50℃
Storage/transportation temperature	-10℃~ +70℃
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
Protection	Surge protection of power: 6KV
	Surge protection of Ethernet ports: 4KV
	ESD: Contact 6kV, Air 8kV
Certification	CCC/CE/UKCA/RoHS/REACH/FCC
MTBF	> 100,000 hours
Warranty	3 years

Structure diagram

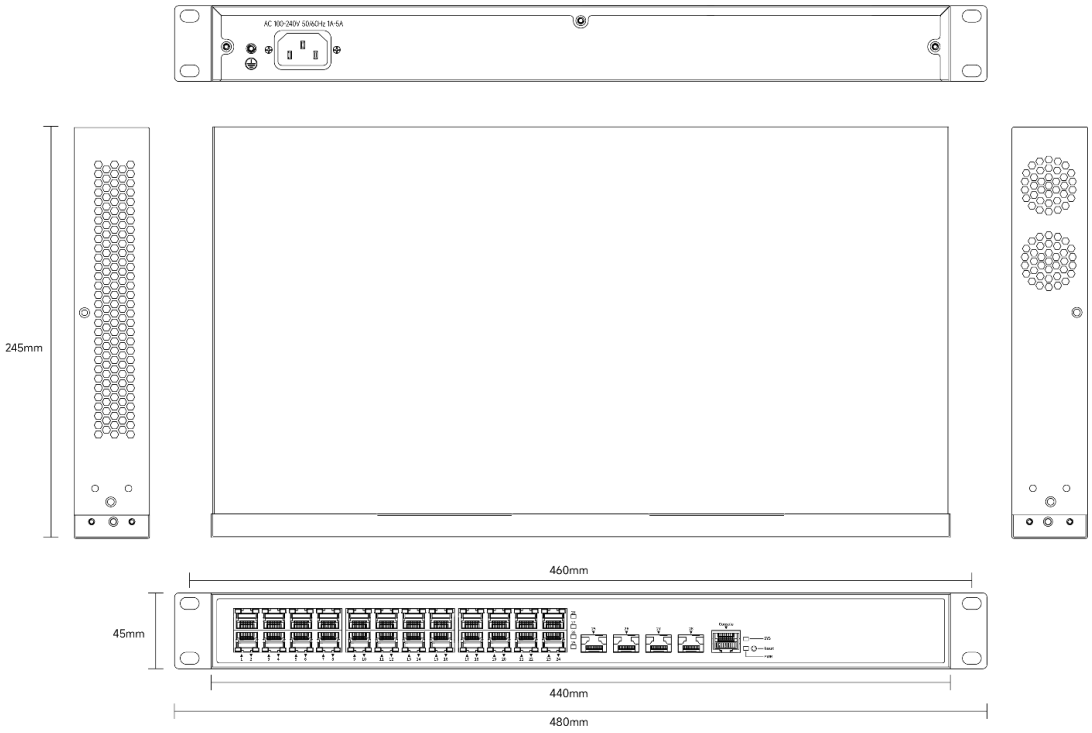

Order information

Model	Description
LT-S8528XGP-4XS24GT-4BT-AC850	Layer 3 managed PoE++ switch with 4*1G/2.5G/10G SFP+ ports and 24*10/100/1000M RJ45 PoE ports , 1-4 ports support PoE++ 90W; AC 100-240V 50/60Hz input, Max PoE output budget 740W
LT-S8528XGP-4XS24GT-4BT-2AC850	Layer 3 managed PoE++ switch with 4*1G/2.5G/10G SFP+ ports and 24*10/100/1000M RJ45 PoE ports , 1-4 ports support PoE++ 90W; Redundant AC 100-240V 50/60Hz input, Max PoE output budget 740W