# 2*10/100/1000Base-T to 2*100/1000Base-X

## Compact Industrial Media Converter

### LT-IMC30G-2GX2GT-E




**Features:**

- 2*10/100/1000Base-T RJ45 ports, 2*100/1000Base-X SFP ports
- DC 12~58V input, redundant power supply with polarity reverse protection
- Powerful Dip switch function:

  1. Fiber redundant; 2. Flow control;

  3.Broadcast storm restrain; 4. Fiber ports 100/1000M selection
- Support 10K Bytes Jumbo frame and 1M large buffer
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design with compact size (30*85*85mm)
- Operation temperature: -40 ℃ ~+75℃

## Overview

The SmartByte LT-IMC30G-2GX2GT-E is the unmanaged industrial grade media converter with 2-port 10/100/1000-T RJ45 and 2-port 100/1000Base-X fiber optical interfaces. It is featuring with fiber redundant, flow control, broadcast storm restrain and fiber ports 100/1000M selection function, which all can be configured by the Dip switch on the top panel.

LT-IMC30G-2GX2GT-E is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant power design with polarity reverse protection, robust IP40 fan-less compact housing with Din-rail installation, wide operation temperature from -40° C to 75° C as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications


## Technical specification

<table>
<tr><td>Model No.</td><td colspan="4">LT-IMC30G-2GX2GT-E</td></tr>
<tr><td rowspan="2">Interface</td><td colspan="2">Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td colspan="2">2</td><td colspan="2">2</td></tr>
<tr><td>Ethernet</td><td colspan="4">2*10/100/1000Base-T RJ45<br>2*100/1000Base-X SFP</td></tr>
<tr><td>Standard</td><td colspan="4">IEEE 802.3 10Base-T Ethernet<br>IEEE 802.3u Fast Ethernet<br>IEEE 802.3ab Gigabit Ethernet<br>IEEE 802.3x Full-Duplex Flow Control<br>IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="4">1. Fiber redundant<br>2. Flow control<br>3. Broadcast storm restrain<br>4. Fiber ports 100/1000M selection</td></tr>
<tr><td rowspan="7">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="3">Off: the device is power off or failed</td></tr>
<tr><td colspan="3">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="3">Off: the chip is normal</td></tr>
<tr><td colspan="3">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="4">1-2 (Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: port speed is 10/100M</td></tr>
<tr><td>On: ports link up</td><td rowspan="2">On: port speed is 1000M</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
</table>

| | | |
|---|---|---|
| | 3-4 ( Fiber ports) Green | Off: ports link down |
| | | On: ports link up |
| | | Blinking: data on TX/RX |
| **Power parameters** | | |
| Input voltage | 12-58VDC, redundant power input | |
| Input current | 0.3A Max | |
| Total power consumption | Full loading ≤3W | |
| Connector | Removable 4-pin terminal block | |
| Reverse polarity protection | Support | |
| **Switching features** | | |
| Switching capacity | 8G | |
| Packet forwarding rate | 11.9Mpps | |
| MAC address table | 8K | |
| VLAN | Support the transmission of the packets with VLAN tags ranging from 1 to 4096 | |
| Buffer | 1M | |
| Forwarding delay | <5us | |
| Jumbo Frame | Support 10Kbytes | |
| MDI/MDIX | Support | |
| Watchdog | Support | |
| **Mechanical structure** | | |
| Case protection | IP40 | |
| Installation method | Din-rail | |
| Dimension(W*D*H) mm | 30*85*85mm | |
| Weight | 0.22 kg | |
| **Operating environment** | | |
| Operating temperature | -40℃~+75℃ | |
| Storage/transportation temperature | -40℃~+85℃ | |
| Relative humidity | 5%~95% （non-condensing） | |
| **Industrial Standard** | Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV） （8/20us） | |

| | |
|---|---|
| | Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV ) (10/700us) |
| | DIP: IEC 61000-4-11 Level 3 (10V) |
| | ESD: IEC 61000-4-2 Level 4 (8K/15K) |
| | Shock：IEC 60068-2-27 |
| | Free fall：IEC 60068-2-32 |
| | Vibration：IEC 60068-2-6 |
| **Certification** | CCC/CE/FCC/RoHS/UKCA |
| **MTBF** | > 200,000 hours |
| **Warranty** | 5 years |

## Structure diagram

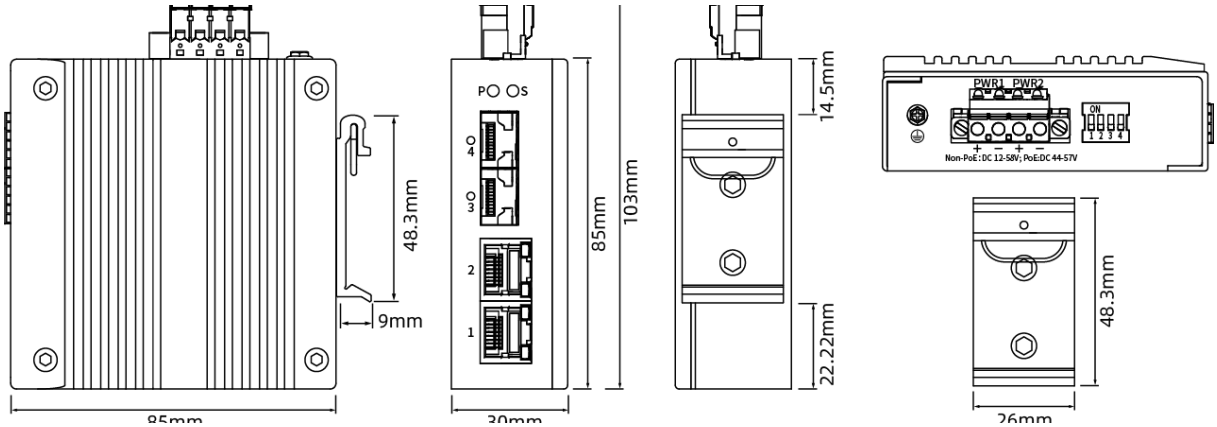


## Order information

| Model | Description |
|---|---|
| LT-IMC30G-2GX2GT-E | 10/100/1000Base-T to 1000Base-X unmanaged compact industrial media converter with 2*10/100/1000Base-T RJ45 ports and 2*100/1000Base-X SFP slots, DC12-58V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃ |