2*10/100/1000Base-T to 100/1000Base-X

Compact Industrial Media Converter

LT-IMC30G-1GX2GT-E Series



Features:

- 2*10/100/1000Base-T RJ45 ports, 1*100/1000Base-X SFP(/SC/ST/FC optional) fiber port
- DC 12~58V input, redundant power supply with polarity reverse protection
- Powerful Dip switch function:

  1.Port isolation; 2. Flow control; 3. Broadcast storm restrain; 4. Fiber port 100/1000M selection
- Support 10K Bytes Jumbo frame and 1M large buffer
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design with compact size (30*85*85mm)
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IMC30G-1GX2GT-E series are unmanaged compact industrial grade media converter with 2-port 10/100/1000-T RJ45 and 1-port 100/1000Base-X fiber optical interface. They are featuring with port isolation, flow control, broadcast storm restrain and fiber port 100/1000M selection function, which all can be configured by the Dip switch on the top panel.

LT-IMC30G-1GX2GT-E series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant power design with polarity reverse protection, robust IP40 compact fan-less housing with Din-rail installation, wide operation temperature from -40° C to 75° C as well as high-level EMI/EMC capability and so on. They are the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications

Technical specification


<table>
<tr><td>Model No.</td><td colspan="3">LT-IMC30G-1GX2GT-E</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber port</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>1</td><td colspan="2">2</td></tr>
<tr><td>Ethernet</td><td colspan="3">2*10/100/1000Base-T RJ45
1*100/1000Base-X SFP (SC/ST/FC optional)</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3ab Gigabit Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port Isolation
2. Flow control
3. Broadcast storm restrain
4. Fiber port 100/1000M selection</td></tr>
<tr><td rowspan="7">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="2">Off: the chip is normal</td></tr>
<tr><td colspan="2">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="4">1-2 (Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: port speed is 10/100M</td></tr>
<tr><td>On: ports link up</td><td rowspan="2">On: port speed is 1000M</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
</table>

	3 (Fiber port) Green	Off: ports link down
		On: ports link up
		Blinking: data on TX/RX
Power parameters		
Input voltage	12-58VDC, redundant power input	
Input current	0.2A Max	
Total power consumption	Full loading ≤2.5W	
Connector	Removable 4-pin terminal block	
Reverse polarity protection	Support	
Support		
Switching features		
Switching capacity	6G	
Packet forwarding rate	8.92 Mpps	
MAC address table	8K	
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096	
Buffer	1M	
Forwarding delay	<5us	
Jumbo Frame	Support 10Kbytes	
MDI/MDIX	Support	
Watchdog	Support	
Mechanical structure		
Case protection	IP40	
Installation method	Din-rail	
Dimension(W*D*H) mm	30*85*85mm	
Weight	0.21 kg	
Operating environment		
Operating temperature	-40℃~+75℃	
Storage/transportation temperature	-40℃~+85℃	
Relative humidity	5%~95%（non-condensing）	


Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	DIP: IEC 61000-4-11 Level 3 (10V)
	ESD: IEC 61000-4-2 Level 4 (8K/15K)
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

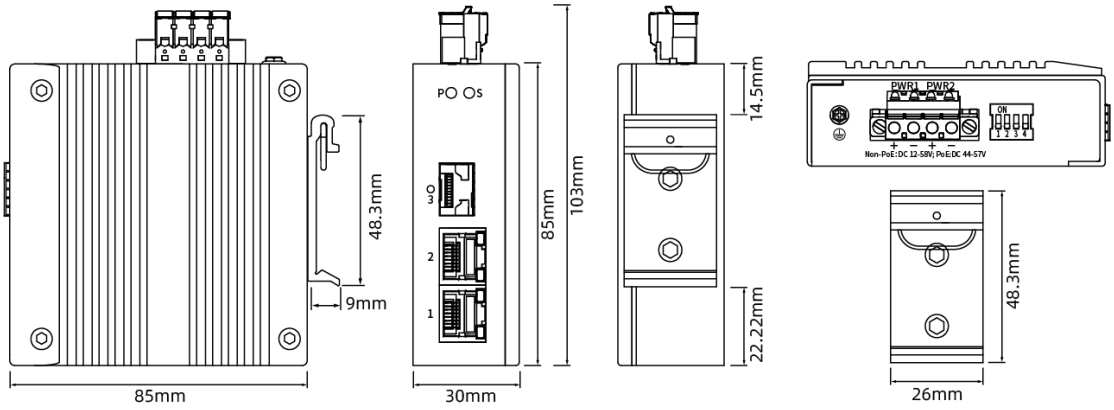

SC/ST/FC model

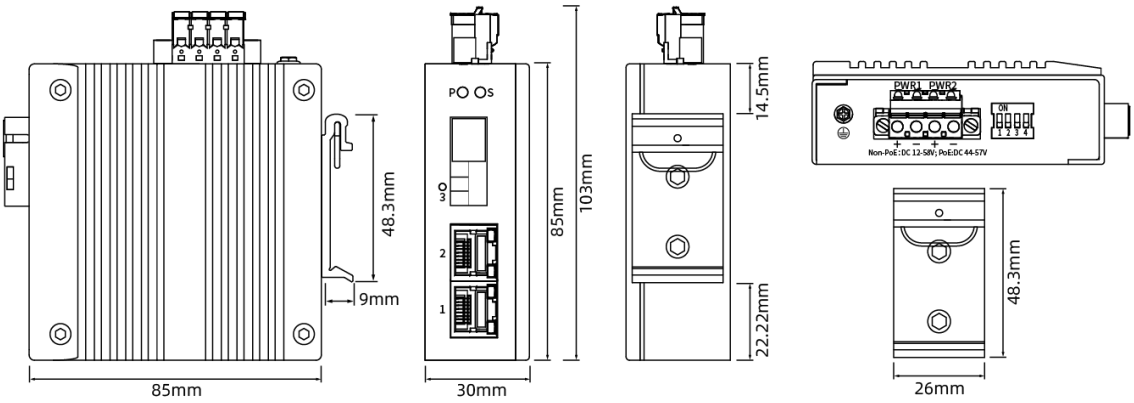

Order information

Model	Description
LT-IMC30G-1GX2GT-E	10/100/1000Base-T to 1000Base-X unmanaged compact industrial media converter with 2*10/100/1000Base-T RJ45 ports and 1*100/1000Base-X SFP slot, DC12-58V input, redundant dual power supply, Din-rail installation. Operation temperature: -40℃～+75℃
LT-IMC30G-1GX2GT-SC/ST/FC-E	10/100/1000Base-T to 1000Base-X unmanaged compact industrial media converter with 2*10/100/1000Base-T RJ45 ports and 1*100/1000Base-X SC port(ST and FC are optional), DC12-58V input, redundant dual power supply, Din-rail installation; Multi-mode/Single mode/ dual fiber/single fiber, 550m -100KM optional; Operation temperature: -40℃～+75℃