2*10/100/1000Base-T PoE to 100/1000Base-X

Compact Industrial PoE media converter

LT-IMC30GP-1GX2GT-E Series



Features:

- 2*10/100/1000Base-T RJ45 PoE ports, 1*100/1000Base-X SFP(/SC/ST/FC optional) fiber port
- DC 44~57V input, redundant power supply with polarity reverse protection
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Powerful Dip switch function:

  1.Port isolation; 2. Fiber port 100/1000M selection; 3. 250m long distance; 4. PoE watchdog
- Support 10K Bytes Jumbo frame and 1M large buffer
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design with compact size (30*85*85mm)
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IMC30GP-1GX2GT-E series are unmanaged compact industrial grade PoE media converter with 2-port 10/100/1000-T PoE and 1-port 100/1000Base-X fiber optical interface. They comply with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. Moreover, they are featuring with port isolation, fiber port 100/1000M selection, 250m long distance transmission mode and PoE watchdog function, which all can be configured by the Dip switch on the top panel.

LT-IMC30GP-1GX2GT-E series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, such as wide range power input 44-57VDC, redundant power design with polarity reverse protection, robust IP40 compact fan-less housing with Din-rail installation, wide operation temperature from -40° C to 75° C as well as high-level EMI/EMC capability and so on. They are the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications

Technical specification


<table>
<tr><td>Model No.</td><td colspan="3">LT-IMC30GP-1GX2GT-E</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber port</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>1</td><td colspan="2">2</td></tr>
<tr><td>Ethernet</td><td colspan="3">2*10/100/1000Base-T PoE
1*100/1000Base-X SFP (SC/ST/FC optional)</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3ab Gigabit Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.3af Power-Over-Ethernet
IEEE 802.3at Power Over Ethernet plus PSE</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port isolation
2. Fiber port 100/1000M selection
3. 250m long distance mode
4. PoE watchdog</td></tr>
<tr><td rowspan="5">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="3">S(PoE usage indicator) Red</td><td colspan="2">Off: total PoE usage < rated 50%</td></tr>
<tr><td colspan="2">Blinking: rated 50% < total PoE usage < rated 90%</td></tr>
<tr><td colspan="2">On: total PoE usage≥ rated 90%</td></tr>
<tr><td>1-2(Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
</table>

		Off: ports link down	Off: PoE not working
		On: ports link up	On: PoE working
		Blinking: data on TX/RX	
	3 (Fiber port) Green	Off: ports link down	
		On: ports link up	
		Blinking: data on TX/RX	
Power parameters			
Input voltage	44-57VDC, redundant power input		
Input current	1.5A Max		
Total power consumption	Full loading without PoE ≤ 2.5W PoE power budget ≤ 60W		
Connector	Removable 4-pin terminal block		
Reverse polarity protection	Support		
Switching features			
Switching capacity	6G		
Packet forwarding rate	8.92 Mpps		
MAC address table	8K		
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096		
Buffer	1M		
Forwarding delay	<5us		
Jumbo Frame	Support 10Kbytes		
MDI/MDIX	Support		
Watchdog	Support		
Mechanical structure			
Case protection	IP40		
Installation method	Din-rail		
Dimension(W*D*H)mm	30*85*85mm		
Weight	0.21 kg		
Operating environment			
Operating temperature	-40℃~+75℃		


Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us）
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us）
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

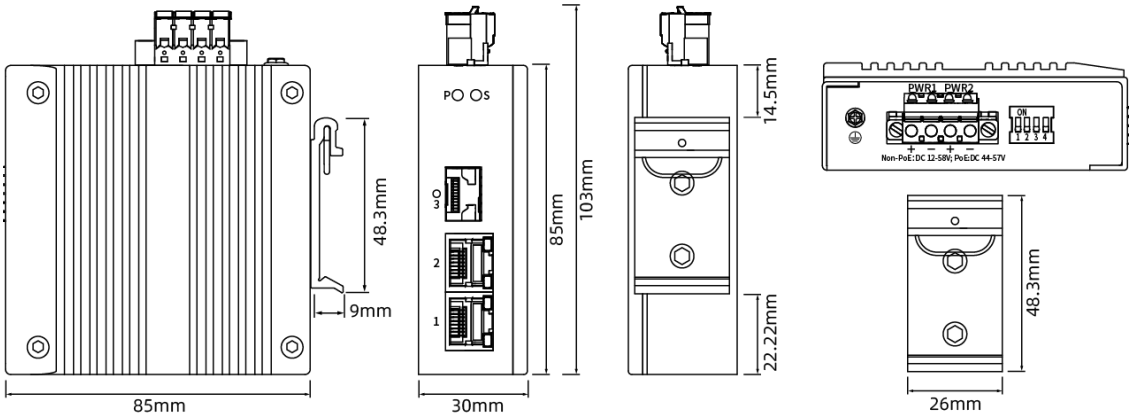

SC/ST/FC model

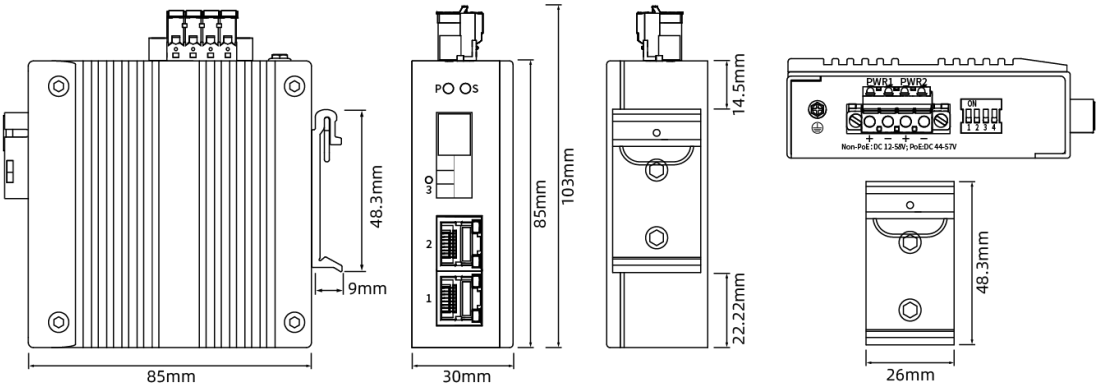

Order information

Model	Description
LT-IMC30GP-1GX2GT-E	10/100/1000Base-T to 1000Base-X unmanaged compact industrial PoE media converter with 2*10/100/1000Base-T PoE ports and 1*100/1000Base-X SFP slot, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply, Din-rail installation. Operation temperature: -40℃～+75℃
LT-IMC30GP-1GX2GT-SC/ST/FC-E	10/100/1000Base-T to 1000Base-X unmanaged compact industrial PoE media converter with 2*10/100/1000Base-T PoE ports and 1*100/1000Base-X SC port(ST and FC are optional), complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply, Din-rail installation; Multi-mode/Single mode/ dual fiber/single fiber, 550m -100KM optional; Operation temperature: -40℃～+75℃