4*10/100Base-TX + 2*100Base-FX Industrial Ethernet Switch

LT-IS3006F-2FX4TX



Features:

- 4*10/100Base-TX RJ45 ports, 2*100Base-FX SFP fiber ports(SC/ST optional)
- DC 12-58V input, redundant power supply with polarity reverse protection
- Powerful Dip switch function:

  1.Port isolation; 2. Flow control; 3. QoS; 4. Broadcast storm restrain
- Support 9K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IS3006F-2FX4TX is the unmanaged industrial grade Ethernet switch with 4-port 10/100Base-TX RJ45 and 2-port 100Base-FX fiber optical interfaces. It is featuring with port isolation, flow control, QoS (1-2 ports) and broadcast storm restrain function, which all can be configured by the Dip switch on the top panel.

LT-IS3006F-2FX4TX is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant

power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40° C to 75° C as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications

Technical specification


<table>
<tr><td>Model No.</td><td colspan="4">LT-IS3006F-2FX4TX</td></tr>
<tr><td rowspan="2">Interface</td><td colspan="2">Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td colspan="2">2</td><td colspan="2">4</td></tr>
<tr><td>Ethernet</td><td colspan="4">4*10/100Base-TX RJ45
2*100Base-FX SFP (SC/ST optional)</td></tr>
<tr><td>Standard</td><td colspan="4">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="4">1. Port Isolation
2. Flow control
3. QoS(1-2 ports)
4. Broadcast storm restrain</td></tr>
<tr><td rowspan="8">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="3">Off: the device is power off or failed</td></tr>
<tr><td colspan="3">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="3">Off: the chip is normal</td></tr>
<tr><td colspan="3">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="4">1-4(Copper ports)</td><td>Green indicators</td><td colspan="2">Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td colspan="2">Off: port speed is 10M</td></tr>
<tr><td>On: ports link up</td><td rowspan="2" colspan="2">On: port speed is 100M</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
<tr><td rowspan="3">5-6 (Fiber ports) Green</td><td colspan="3">Off: ports link down</td></tr>
<tr><td colspan="3">On: ports link up</td></tr>
<tr><td colspan="3">Blinking: data on TX/RX</td></tr>
<tr><td colspan="5">Power parameters</td></tr>
<tr><td>Input voltage</td><td colspan="4">12-58VDC, redundant power input</td></tr>
<tr><td>Input current</td><td colspan="4">0.5A Max</td></tr>
<tr><td>Total power consumption</td><td colspan="4">Full loading ≤5W</td></tr>
</table>

Connector	Removable 4-pin terminal block
Reverse polarity protection	Support
Switching features	
Switching capacity	1.2G
Packet forwarding rate	1.78Mpps
MAC address table	2K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	2Kbits
Forwarding delay	<100us
Jumbo Frame	Support 9Kbytes
MDI/MDIX	Support
Watchdog	Support
Network Topology	
Star topology	Support
Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	48*98*98mm
Weight	0.6 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us）
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us）
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）


	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

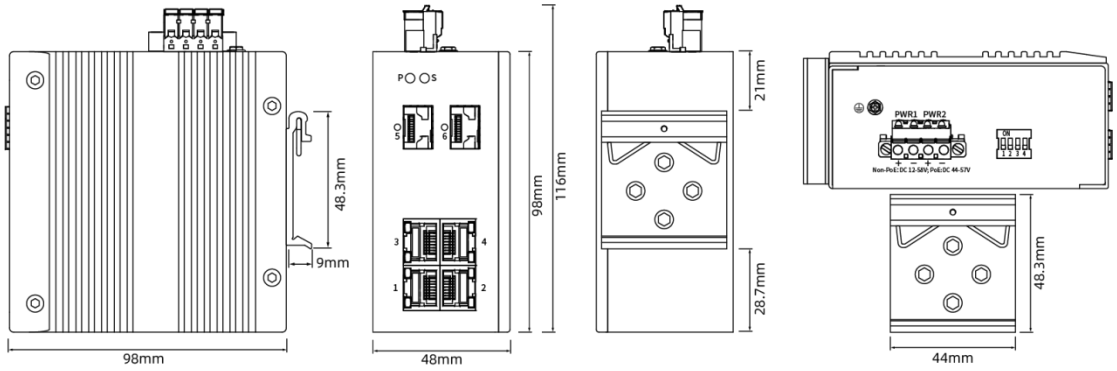

SC/ST model

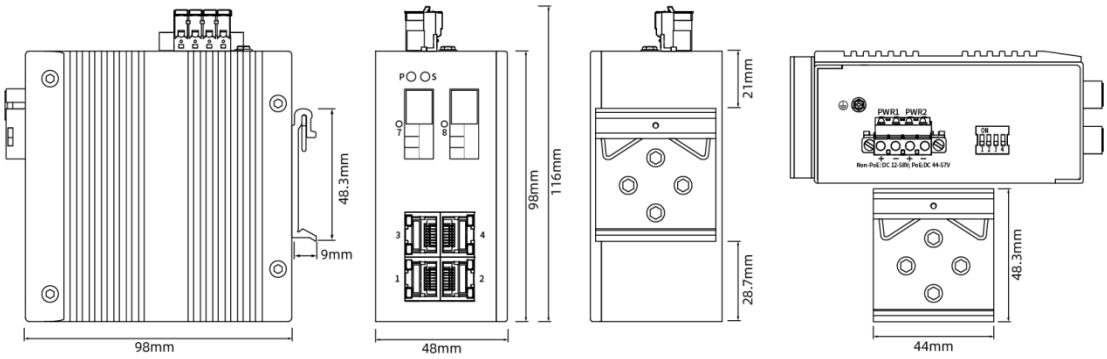

Order information

Model	Description
LT-IS3006F-2FX4TX	Unmanaged industrial Ethernet switch with 4*10/100Base-TX RJ45 ports and 2*100Base-FX SFP ports, DC12-58V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃
LT-IS3006F-2FX4TX-SC/ST	Unmanaged industrial Ethernet switch with 4*10/100Base-TX RJ45 ports and 2*100Base-FX SC/ST ports, DC12-58V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃