4*10/100Base-TX PoE + 2*100Base-FX Industrial PoE Switch

LT-IS3006FP-2FX4TX



Features:

- 4*10/100Base-TX RJ45 PoE ports, 2*100Base-FX SFP fiber ports(SC/ST optional)
- DC 44~57V input, redundant power supply with polarity reverse protection
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Powerful Dip switch function:

  1.Port isolation; 2. 250m long distance; 3. QoS; 4. PoE watchdog
- Support 9K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IS3006FP-2FX4TX is the unmanaged industrial grade PoE switch with 4-port 10/100Base-TX PoE and 2-port 100Base-FX fiber optical interfaces. It complies with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. Moreover, it is featuring with port isolation, 250m long distance transmission mode, QoS (1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel.

LT-IS3006FP-2FX4TX is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 44-57VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications.

Technical specification


<table>
<tr><td>Model No.</td><td colspan="3">LT-IS3006FP-2FX4TX</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>2</td><td colspan="2">4</td></tr>
<tr><td>Ethernet</td><td colspan="3">4*10/100Base-TX PoE
2*100Base-FX SFP (SC/ST optional)</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.3af Power-Over-Ethernet
IEEE 802.3at Power Over Ethernet plus PSE</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port Isolation
2. 250m long distance mode
3. QoS(1-2 ports)
4. PoE watchdog</td></tr>
<tr><td rowspan="9">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="3">S(PoE usage indicator) Red</td><td colspan="2">Off: total PoE usage < rated 50%</td></tr>
<tr><td colspan="2">Blinking: rated 50% < total PoE usage < rated 90%</td></tr>
<tr><td colspan="2">On: total PoE usage≥rated 90%</td></tr>
<tr><td rowspan="4">1-4(Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: PoE not working</td></tr>
<tr><td>On: ports link up</td><td rowspan="2">On: PoE working</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
<tr><td rowspan="3">5-6 (Fiber ports) Green</td><td colspan="2">Off: ports link down</td></tr>
<tr><td colspan="2">On: ports link up</td></tr>
<tr><td colspan="2">Blinking: data on TX/RX</td></tr>
</table>

Power parameters	
Input voltage	44-57VDC, redundant power input
Input current	3A Max
Total power consumption	Full loading without PoE ≤4W PoE power budget ≤ 120W
Connector	Removable 4-pin terminal block
Reverse polarity protection	Support
Switching features	
Switching capacity	1.2G
Packet forwarding rate	1.78Mpps
MAC address table	2K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	2Kbits
Forwarding delay	<100us
Jumbo Frame	Support 9Kbytes
MDI/MDIX	Support
Watchdog	Support
Network Topology	
Star topology	Support
Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	30*98*98mm
Weight	0.6 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）


Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
	DIP: IEC 61000-4-11 Level 3 (10V)
	ESD: IEC 61000-4-2 Level 4 (8K/15K)
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

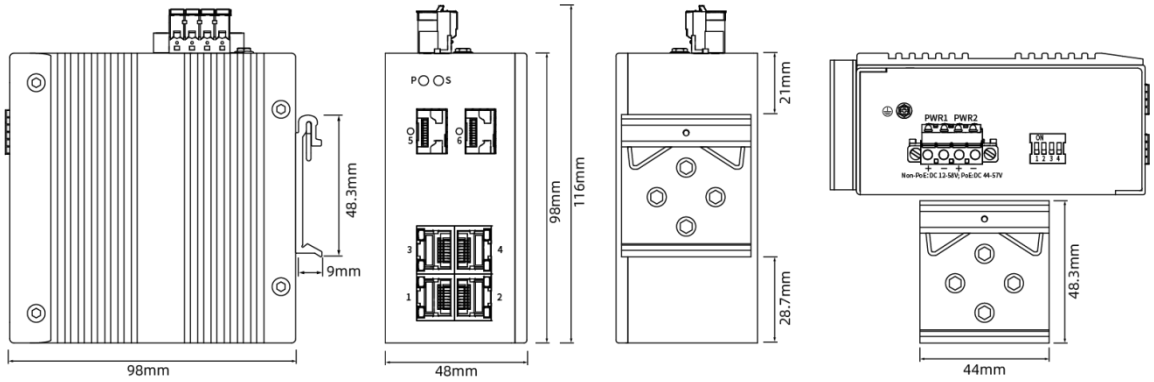

SC/ST model

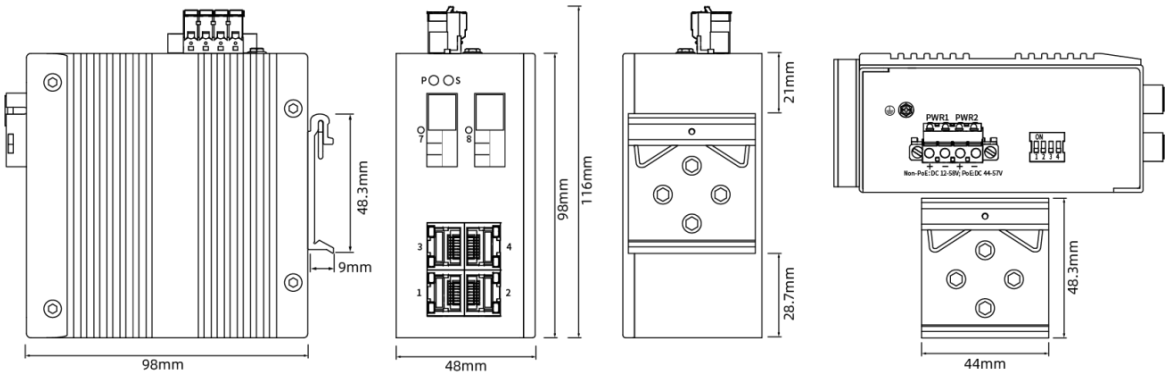

Order information

Model	Description
LT-IS3006FP-2FX4TX	Unmanaged industrial PoE switch with 4*10/100Base-TX PoE ports and 2*100Base-FX SFP slots, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃
LT-IS3006FP-2FX4TX-SC/ ST	Unmanaged industrial PoE switch with 4*10/100Base-TX PoE ports and 2*100Base-FX SC or ST ports, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃