4*10/100/1000Base-T PoE + 2*1000Base-X SFP

Industrial PoE++ Switch

LT-IS6006GP-2GX4GT-4BT



Features:

- 4*10/100/1000Base-T RJ45 PoE++ ports, 2*1000Base-X SFP slots
- DC 44-57V input, redundant power supply with polarity reverse/over-current protection
- Support one channel output relay alarm(terminal block Pin 5/6) for DC power failure
- Complies with IEEE802.3af PoE, IEEE802.3at PoE+ and IEEE802.3bt PoE++ standard
- Support powerful Dip switch function:

  1. Port isolation; 2. 250m long distance (1-2 ports); 3. QoS (1-2 ports); 4. PoE watchdog
- Support 10K Bytes Jumbo frame
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75 ℃

Overview

The SmartByte LT-IS6006GP-2GX4GT-4BT is the highly reliable industrial PoE switch with 4-port 10/100/1000-T PoE and 2-port 1000Base-X SFP slots. It complies with IEEE802.3af, IEEE802.3at and IEEE802.3bt standard PoE protocol, the Max power consumption can reach 90W per port, which are the idea solution for those higher power consumption industrial networking PDs. Moreover, it is also featuring with port isolation, 250m long distance transmission mode (1-2 ports), QoS (1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel

LT-IS6006GP-2GX4GT-4BT is a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 44-57VDC, redundant power design with polarity reverse/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and crucial


Technical specification

Model No.	LT-IS6006GP-2GX4GT-4BT	
Interface	Fiber ports	Copper RJ45 ports
	2	4
Ethernet	4*10/100/1000Base-T PoE++ 2*1000Base-X SFP	
Alarm port	One relay output for power failure. Alarm relay current carry ability: 1A@24VDC	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet IEEE 802.3af IEEE 802.3at IEEE 802.3bt	
Dip Switch	1. Port isolation 2. 250m long distance mode (1-2 ports) 3. QoS(1-2 ports) 4. PoE watchdog	
LED Indicators		
P(Power indicator) Green	Off: the device is power off or failed	
	On: the device power on is normal	
S (PoE usage indicator) Red	Off: total PoE usage < rated 50%	

	Blinking: rated 50% < total PoE usage < rated 90%	
	Normal on: total PoE usage≥ rated 90%	
1-4 (Copper ports)	Green indicators	Yellow indicators
	Off: ports link down	Off: PoE not working
	On: ports link up	On: PoE working on af/at state
	Blinking: data on TX/RX	Blinking: PoE working on bt state
5-6 (Fiber ports) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
Power parameters		
Input voltage	44-57VDC (802.3af) 52-57VDC (802.3at/802.3bt) redundant power input	
Input current	5.7A Max	
Total power consumption	Full loading without PoE ≤8W PoE power budget ≤240W	
Connector	Removable 6-pin terminal block	
Reverse polarity protection	Support	
Over-current protection	Support	
Switching features		
Switching capacity	12G	
Packet forwarding rate	17.8 Mpps	
MAC address table	16K	
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096	
Buffer	2M	
Forwarding delay	<5us	
Jumbo Frame	Support 10Kbytes	
MDI/MDIX	Support	
Watchdog	Support	
Network Topology		
Star topology	Support	

Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	54*98*130mm
Weight	0.85 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industry standard	EMI：FCC Part 15B Class A
	Surge protection of power: IEC 61000-4-5 6KV/4KV（8/20us）
	Surge protection of Ethernet ports： IEC 61000-4-5 6KV/2KV（10/700us）
	RS: IEC 61000-4-3 80 MHz-1 GHz：10 V/m
	EFT: IEC 61000-4-4 power interface: 4K；Ethernet ports: 2K
	CS: IEC 61000-4-6 10V
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

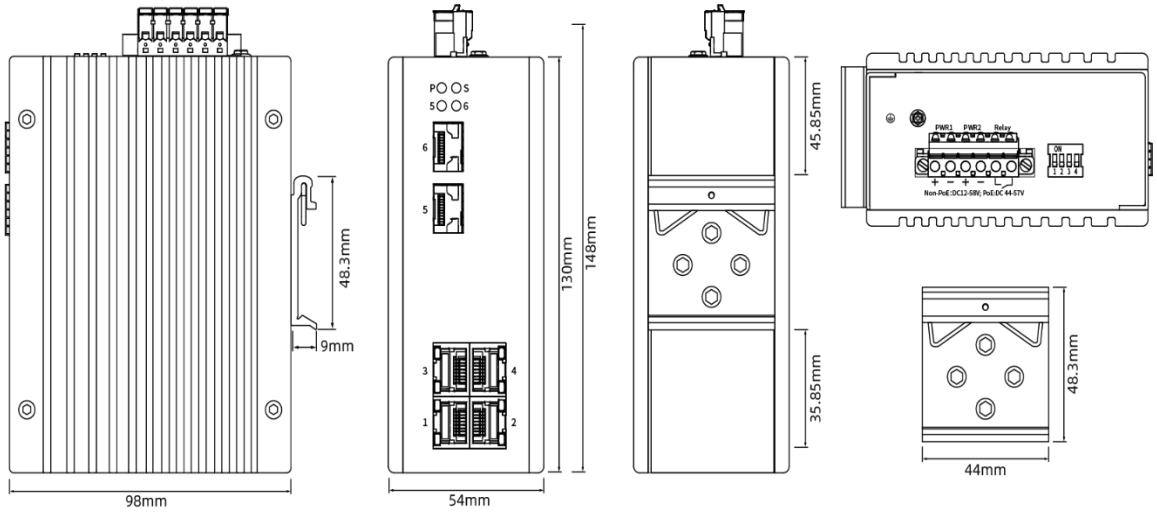

Order information

Model	Description
LT-IS6006GP-2GX4GT-4BT	Industrial PoE switch with 4*10/100/1000Base-T RJ45 PoE++ ports and 2*1000Base-X SFP slots, complies with IEEE802.3af, IEEE802.3at and IEEE802.3bt standard, DC44-57V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃