5*10/100Base-TX Industrial Ethernet Switch

LT-IS3005F-5TX



Features:

- 5*10/100Base-TX RJ45 ports （NO.5 is the uplink port)
- DC 12~58V input, redundant power supply with polarity reverse protection
- Dip switch function: 1.Port isolation; 2. Flow control; 3. QoS; 4. Broadcast storm restrain
- Support 10K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IS3005F-5TX is the unmanaged industrial grade Ethernet switch with 5-port 10/100Base-TX RJ45. It is featuring with port isolation, flow control, QoS (1-2 ports) and broadcast storm restrain function, which all can be configured by the Dip switch on the top panel.

LT-IS3005F-5TX is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant power

design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40 ℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications


Technical specification

<table>
<tr><td>Model No.</td><td colspan="4">LT-IS3005F-5TX</td></tr>
<tr><td rowspan="2">Interface</td><td colspan="2">Fiber port</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td colspan="2">0</td><td colspan="2">5</td></tr>
<tr><td>Ethernet</td><td colspan="4">5*10/100Base-TX RJ45 (NO.5 is the uplink port)</td></tr>
<tr><td>Standard</td><td colspan="4">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="4">1. Port Isolation
2. Flow control
3. QoS(1-2 ports)
4. Broadcast storm restrain</td></tr>
<tr><td rowspan="7">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="3">Off: the device is power off or failed</td></tr>
<tr><td colspan="3">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="3">Off: the chip is normal</td></tr>
<tr><td colspan="3">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="4">1-5(Copper ports)</td><td>Green indicators</td><td colspan="2">Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td colspan="2">Off: port speed is 10M</td></tr>
<tr><td>On: ports link up</td><td rowspan="2" colspan="2">On: port speed is 100M</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
<tr><td colspan="5">Power parameters</td></tr>
<tr><td>Input voltage</td><td colspan="4">12-58VDC, redundant power input</td></tr>
<tr><td>Input current</td><td colspan="4">0.5A Max</td></tr>
<tr><td>Total power consumption</td><td colspan="4">Full loading ≤4W</td></tr>
<tr><td>Connector</td><td colspan="4">Removable 4-pin terminal block</td></tr>
<tr><td>Reverse polarity protection</td><td colspan="4">Support</td></tr>
<tr><td colspan="5">Switching features</td></tr>
</table>

Switching capacity	1G
Packet forwarding rate	1.48 Mpps
MAC address table	2K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	16K
Forwarding delay	<10us
Jumbo Frame	Support 2Kbytes
MDI/MDIX	Support
Watchdog	Support
Network Topology	
Star topology	Support
Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H) mm	30*98*130mm
Weight	0.5 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us）
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us）
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6

Certification	CCC/CE/UKCA/RoHS/REACH/FCC
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

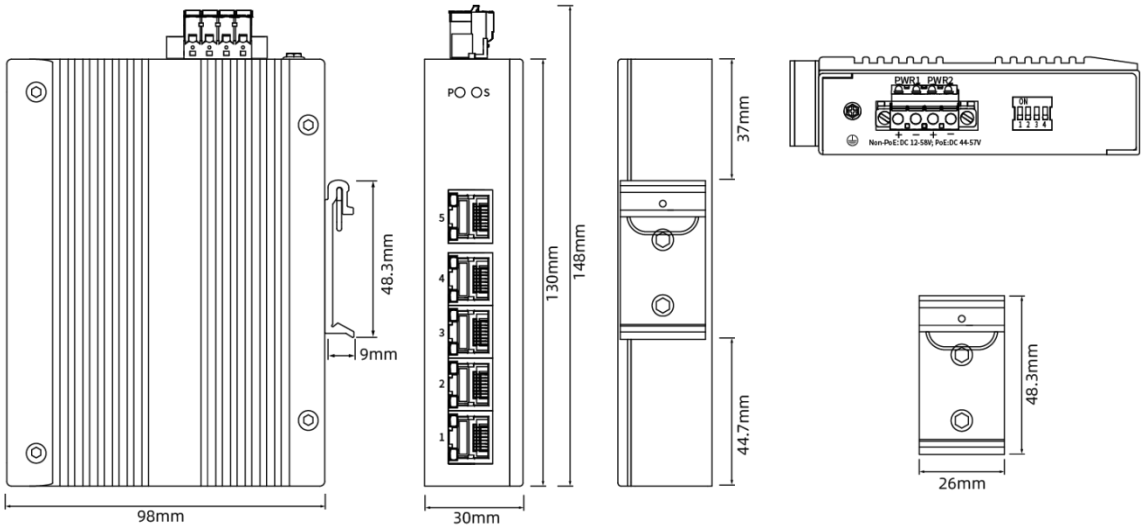

Order information

Model	Description
LT-IS3005F-5TX	5-port 10/100Base-TX RJ45 industrial Ethernet switch, DC12-58V input, redundant dual power supply, Din-rail installation. Operation temperature: -40℃～+75℃