8*10/100/1000Base-T + 2*1000Base-X Industrial Ethernet Switch

LT-IS3010G-2GX8GT Series



Features:

- 8*10/100/1000M RJ45 ports, 2*1000Base-X SFP (/SC/ST optional) fiber ports
- DC 12~58V input, redundant power supply with polarity reverse/over- current protection
- Powerful Dip switch function:

  1. Port isolation 2. Flow control; 3. QoS; 4. Broadcast storm restrain
- Support 10K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75 ℃

Overview

The SmartByte LT-IS3010G-2GX8GT series are the unmanaged industrial grade Ethernet switch with 8-port 10/100/1000-T RJ45 and 2-port 1000Base-X fiber optical interfaces. They are featuring with port isolation, flow control, QoS(1-2 ports) and broadcast storm restrain function, which all can be configured by the Dip switch on the top panel.

LT-IS3010G-2GX8GT series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40 ℃ to 75 ℃ as well as high-level EMI/EMC capability and so on. They are the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications.

Technical specification


<table>
<tr><td>Model No.</td><td colspan="3">LT-IS3010G-2GX8GT</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>2</td><td colspan="2">8</td></tr>
<tr><td>Ethernet</td><td colspan="3">8*10/100/1000Base-T RJ45
2*1000Base-X SFP</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3ab Gigabit Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port Isolation
2. Flow control
3. QoS(1-2 ports)
4. Broadcast storm restrain</td></tr>
<tr><td rowspan="6">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="2">Off: the chip is normal</td></tr>
<tr><td colspan="2">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="3">1-8 (Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: port speed is 10/100M</td></tr>
<tr><td>On: ports link up</td><td>On: port speed is</td></tr>
</table>

		Blinking: data on TX/RX	1000M
	9-10 (Fiber ports) Green	Off: ports link down	
		On: ports link up	
		Blinking: data on TX/RX	
Power parameters			
Input voltage	12-58VDC, redundant power input		
Input current	0.6 Max		
Total power consumption	Full loading ≤7.5W		
Connector	Removable 4-pin terminal block		
Reverse polarity protection	Support		
Switching features			
Switching capacity	20G		
Packet forwarding rate	29.7 Mpps		
MAC address table	16K		
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096		
Buffer	2M		
Forwarding delay	<5us		
Jumbo Frame	Support 10Kbytes		
MDI/MDIX	Support		
Watchdog	Support		
Network Topology			
Star topology	Support		
Bus topology	Support		
Tree Topology	Support		
Mechanical structure			
Case protection	IP40		
Installation method	Din-rail		
Dimension(W*D*H)mm	48*98*130mm		
Weight	0.70 kg		


Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us)
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

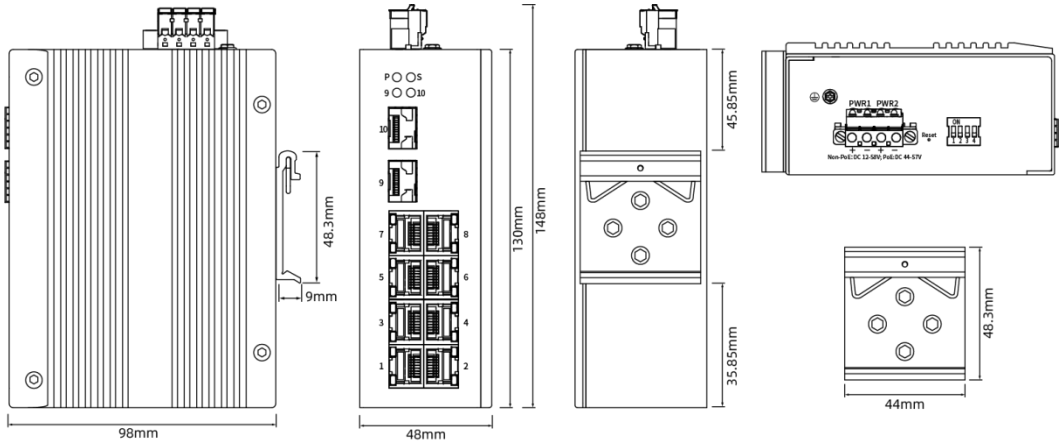

SC/ST/FC model

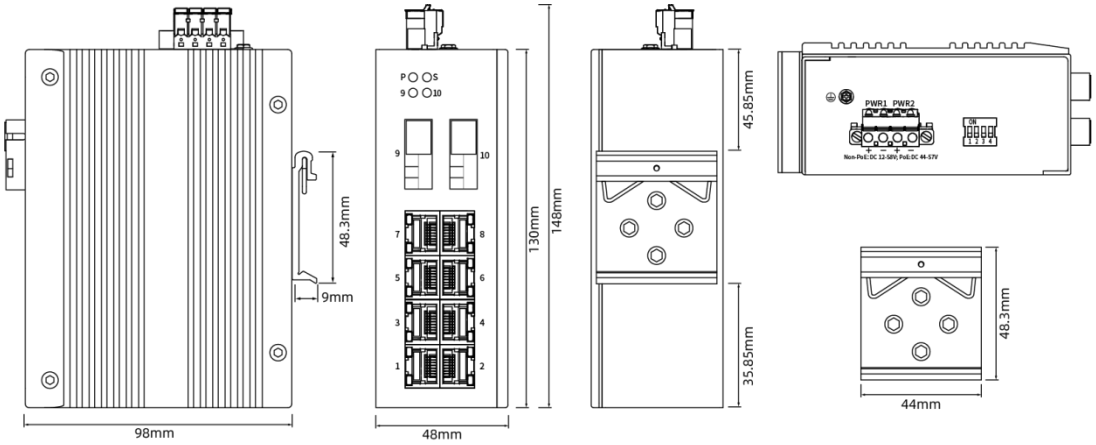

Order information

Model	Description
LT-IS3010G-2GX8GT	Unmanaged industrial Ethernet switch with 8*10/100/1000Base-T RJ45 ports and 2*1000Base-X SFP slots, DC12-58V, redundant dual power supply, Din-rail installation. Operation temperature: -40℃～+75℃
LT-IS3010G-2GX8GT-SC/ ST	Unmanaged industrial Ethernet switch with 8*10/100/1000Base-T RJ45 ports and 2*1000Base-X SC or ST ports, DC12-58V, redundant dual power supply, Din-rail installation; Multi-mode/Single mode/ dual fiber/single fiber, 550m -100KM optional; Operation temperature: -40℃～+75℃