8*10/100/1000Base-T Industrial Ethernet Switch

LT-IS3008G-8GT



Features:

- 8*10/100/1000M RJ45 ports(No.8 is uplink port when port isolation enabled)
- DC 12-58V input, redundant power supply with polarity reverse protection
- Dip switch function:

  1. Port isolation; 2. Flow control; 3. QoS; 4. Broadcast storm restrain
- Support 10K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75 ℃

Overview

The SmartByte LT-IS3008G-8GT is a unmanaged industrial grade Ethernet switch with 8-port 10/100/1000Base-T RJ45 ports (No.8 can be uplink port). It is featuring with port isolation, flow control, QoS(1-2 ports) and broadcast storm restrain, which all can be configured by the Dip

switch on the top panel.

LT-IS3008G-8GT is also a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power input 12-58VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications.


Technical specification

<table>
<tr><td>(Model No.</td><td colspan="4">LT-IS3008G-8GT</td></tr>
<tr><td rowspan="2">Interface</td><td colspan="2">Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td colspan="2">0</td><td colspan="2">8</td></tr>
<tr><td>Ethernet</td><td colspan="4">8*10/100/1000Base-T RJ45 ports</td></tr>
<tr><td>Standard</td><td colspan="4">IEEE 802.3 Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3ab Gigabit Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td>Dip Switch</td><td colspan="4">1. Port Isolation (No.8 is the uplink port)
2. Flow control
3. QoS (1-2 ports)
4. Broadcast storm restrain</td></tr>
<tr><td rowspan="6">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="3">Off: the device is power off or failed</td></tr>
<tr><td colspan="3">On: the device power on is normal</td></tr>
<tr><td rowspan="2">S(System indicator) Red</td><td colspan="3">Off: the chip is normal</td></tr>
<tr><td colspan="3">On: the chip read/write is unnormal</td></tr>
<tr><td rowspan="4">1-8 (Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td rowspan="2">Off: port speed is 10/100M
On: port speed is 1000M</td></tr>
<tr><td>On: ports link up</td></tr>
<tr><td>Blinking: data on TX/RX</td></tr>
<tr><td colspan="5">Power parameters</td></tr>
<tr><td>Input voltage</td><td colspan="4">12-58 VDC, redundant power input</td></tr>
<tr><td>Input current</td><td colspan="4">0.6A Max</td></tr>
<tr><td>Total consumption</td><td colspan="4">Full loading without PoE ≤5W</td></tr>
<tr><td>Connector</td><td colspan="4">Removable 4-pin terminal block</td></tr>
</table>

Reverse polarity protection	Support
Switching features	
Switching capacity	16G
Packet forwarding rate	23.8 Mpps
MAC address table	16K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	2M
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDI/MDIX	Support
Watchdog	Support
Network Topology	
Star topology	Support
Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	48*98*98mm
Weight	0.58 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95% （non-condensing）
Industry standard	Surge protection of power: IEC 61000-4-5 Level 3 (6KV/2KV） (8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (6KV/2KV) (10/700us)
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock: IEC 60068-2-27

	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

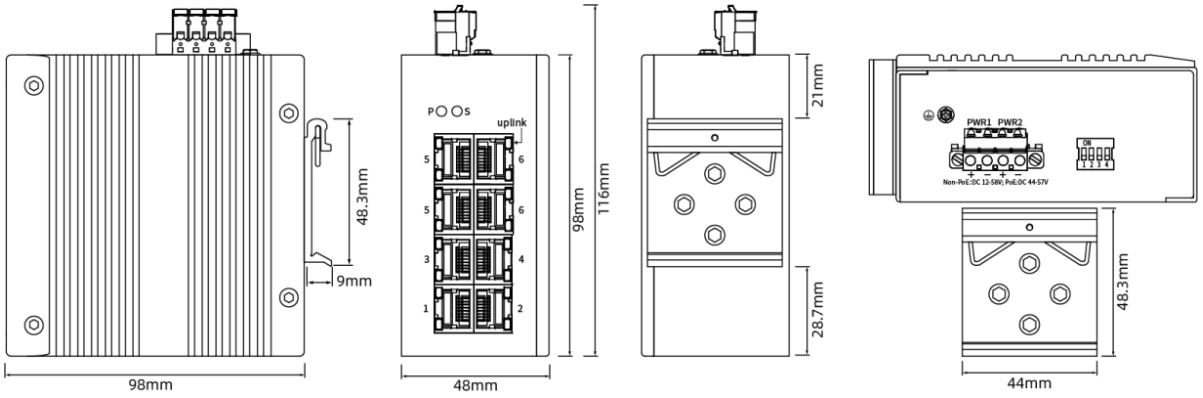

Order information

Model	**Description**
LT-IS3008G-8GT	8-port 10/100/1000Base-T unmanaged industrial Ethernet switch, DC12-58V, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃