8*10/100/1000Base-T PoE + 2*1000Base-X SFP

Industrial PoE++ Switch

LT-IS6010GP-2GX8GT-4BT



Features:

- 8*10/100/1000Base-T RJ45 PoE ports, 2*1000Base-X SFP slots
- DC 44-57V input, redundant power supply with polarity reverse/over-current protection
- Support one channel output relay alarm(terminal block Pin 5/6) for DC power failure
- Complies with IEEE802.3af PoE, IEEE802.3at PoE+ and IEEE802.3bt PoE++ standard
- Support powerful Dip switch function:

  1. Port isolation; 2. 250m long distance (1-4 ports); 3. QoS (1-2 ports); 4. PoE watchdog
- Support 10K Bytes Jumbo frame
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75 ℃

Overview

The SmartByte LT-IS6010GP-2GX8GT-4BT is the highly reliable industrial PoE switch with 8-port 10/100/1000-T PoE and 2-port 1000Base-X SFP slots. It complies with IEEE802.3af, IEEE802.3at and IEEE802.3bt standard PoE protocol, the Max power consumption can reach 90W per port(1-4 ports), which are the idea solution for those higher power consumption industrial networking PDs. Moreover, it is also featuring with port isolation, 250m long distance transmission mode (1-4 ports), QoS(1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel

LT-IS6010GP-2GX8GT-4BT is a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 44-57VDC, redundant power design with polarity reverse/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and crucial


Technical specification

Model No.	LT-IS6010GP-2GX8GT-4BT	
Interface	Fiber ports	Copper RJ45 ports
	2	8
Ethernet	8*10/100/1000Base-T PoE, 1-4 ports PoE++ 2*1000Base-X SFP	
Alarm port	One relay output for power failure. Alarm relay current carry ability: 1A@24VDC	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3af IEEE 802.3at IEEE 802.3bt	
Dip Switch	1. Port isolation 2. 250m long distance mode (1-4 ports) 3. QoS(1-2 ports) 4. PoE watchdog	
LED Indicators		
P(Power indicator) Green	Off: the device is power off or failed	
	On: the device power on is normal	
S (PoE usage indicator) Red	Off: total PoE usage < rated 50%	

	Blinking: rated 50% < total PoE usage < rated 90%	
	Normal on: total PoE usage≥rated 90%	
1-4 (Copper ports)	Green indicators	Yellow indicators
	Off: ports link down	Off: PoE not working
	On: ports link up	On: PoE working
	Blinking: data on TX/RX	Blinking: PoE working on bt state
5-6 (Fiber ports) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
Power parameters		
Input voltage	44-57VDC (802.3af) 52-57VDC (802.3at/802.3bt) redundant power input	
Input current	5.7A Max	
Total power consumption	Full loading without PoE ≤8W PoE power budget ≤240W	
Connector	Removable 6-pin terminal block	
Reverse polarity protection	Support	
Over-current protection	Support	
Switching features		
Switching capacity	20G	
Packet forwarding rate	29.7 Mpps	
MAC address table	16K	
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096	
Buffer	2M	
Forwarding delay	<5us	
Jumbo Frame	Support 10Kbytes	
MDI/MDIX	Support	
Watchdog	Support	
Network Topology		
Star topology	Support	

Bus topology	Support
Tree Topology	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	54*98*130mm
Weight	0.90 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industry standard	EMI：FCC Part 15B Class A
	Surge protection of power: IEC 61000-4-5 6KV/4KV（8/20us）
	Surge protection of Ethernet ports： IEC 61000-4-5 6KV/2KV（10/700us）
	RS: IEC 61000-4-3 80 MHz-1 GHz：10 V/m
	EFT: IEC 61000-4-4 power interface: 4K；Ethernet ports: 2K
	CS: IEC 61000-4-6 10V
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

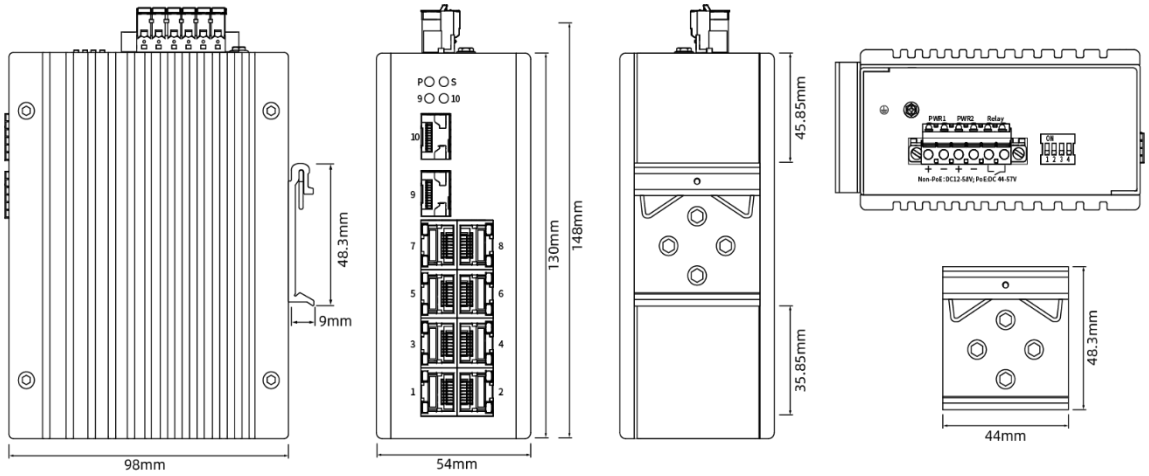

Order information

Model	Description
LT-IS6010GP-2GX8GT-4BT	Industrial PoE switch with 8*10/100/1000Base-T RJ45 PoE ports and 2*1000Base-X SFP slots, complies with IEEE802.3af, IEEE802.3at and IEEE802.3bt standard, DC44-57V input, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃