8*10/100/1000Base-T PoE + 2*1000Base-X SFP Industrial PoE Switch

LT-IS3010GP-2GX8GT Series



Features:

- 8*10/100/1000Base-T RJ45 PoE ports, 2*1000Base-X SFP (SC/ST optional) ports
- DC 44-57V input, redundant power supply with polarity reverse protection
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Dip switch function:

  1.Port isolation; 2. 250m long distance; 3. QoS (1-2 ports); 4. PoE watchdog
- Support 10K Bytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IS3010GP-2GX8GT are the unmanaged industrial grade PoE switches with 8-port 10/100/1000-T PoE and 2-port 1000Base-X fiber optical interfaces. They comply with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. Moreover, they are also featuring with port isolation, 250m long distance transmission mode (1-4 ports), QoS (1-2 ports) and PoE watchdog function, which all can be configured by the Dip switch on the top panel.

LT-IS3010GP-2GX8GT series are also high cost-effective easy-to-use devices, which provide essential industrial Ethernet networking function, such as wide range power input 44-57VDC, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40° C to 75° C as well as high-level EMI/EMC capability and so on. They are the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions exceed commercial product specifications.

Technical specification


<table>
<tr><td>Model No.</td><td colspan="3">LT-IS3010GP-2GX8GT</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber ports</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>2</td><td colspan="2">8</td></tr>
<tr><td>Ethernet</td><td colspan="3">8*10/100/1000Base-T PoE
2*1000Base-X SFP (SC/ST optional)</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3ab Gigabit Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet
IEEE 802.3af Power-over-Ethernet
IEEE 802.3at Power-Over-Ethernet Plus PSE</td></tr>
<tr><td>Dip Switch</td><td colspan="3">1. Port Isolation
2. 250m long distance mode(1-4 ports)
3. QoS(1-2 ports)
4. PoE watchdog</td></tr>
<tr><td rowspan="6">LED Indicators</td><td rowspan="2">P(Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="3">S(PoE usage indicator) Red</td><td colspan="2">Off: total PoE usage < rated 50%</td></tr>
<tr><td colspan="2">Blinking: rated 50% < total PoE usage < rated 90%</td></tr>
<tr><td colspan="2">On: total PoE usage ≥rated 90%</td></tr>
<tr><td rowspan="2">1-8 (Copper ports)</td><td>Green indicators</td><td>Yellow indicators</td></tr>
<tr><td>Off: ports link down</td><td>Off: PoE not working</td></tr>
</table>

		On: ports link up Blinking: data on TX/RX	On: PoE working
	9-10 (Fiber ports) Green	Off: ports link down On: ports link up Blinking: data on TX/RX	
Power parameters			
Input voltage	44-57VDC, redundant power input		
Input current	5.6A Max		
Total consumption	Full loading without PoE ≤7.5W PoE power budget ≤240W		
Connector	Removable 4-pin terminal block		
Reverse polarity protection	Support		
Switching features			
Switching capacity	20G		
Packet forwarding rate	29.7 Mpps		
MAC address table	16K		
VLAN	4K		
Buffer	2M		
Forwarding delay	<5us		
Jumbo Frame	Support 10Kbytes		
MDI/MDIX	Support		
Watchdog	Support		
Network Topology			
Star topology	Support		
Bus topology	Support		
Tree Topology	Support		
Mechanical structure			
Case protection	IP40		
Installation method	Din-rail		
Dimension(W*D*H)mm	48*98*130mm		
Weight	0.72 kg		
Operating environment			


Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95% （non-condensing）
Industry standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us）
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us)）
	DIP: IEC 61000-4-11 Level 3（10V）
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock: IEC 60068-2-27
	Free fall: IEC 60068-2-32
	Vibration: IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/UKCA/Reach
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

SFP model

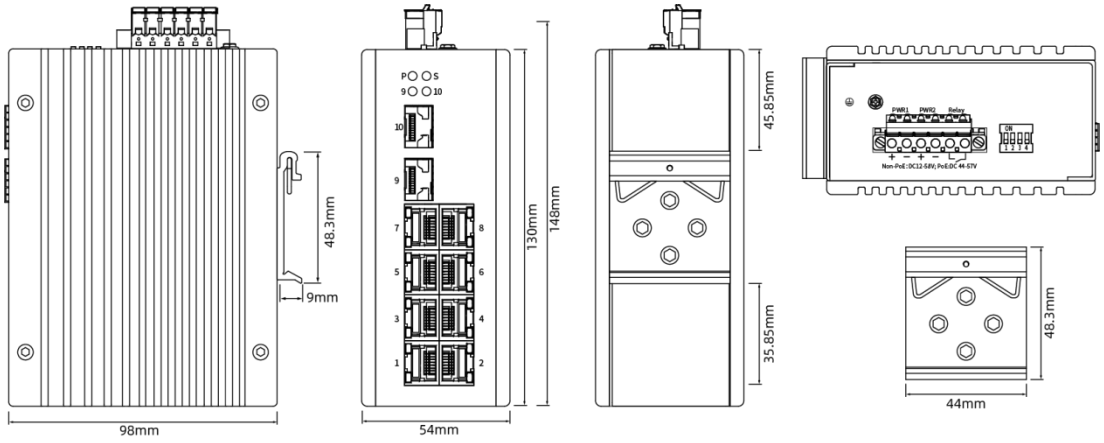

SC/ST model

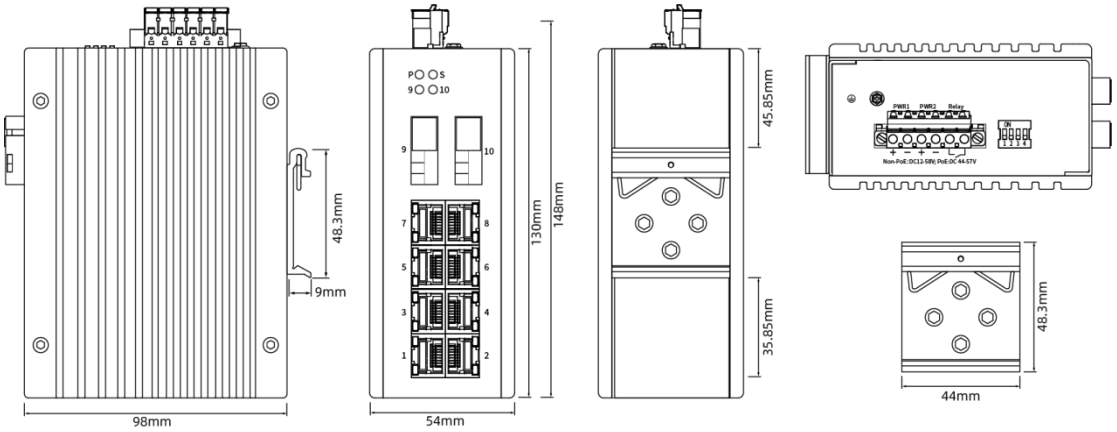

Order information

Model	Description
LT-IS3010GP-2GX8GT	Unmanaged industrial PoE switch with 8*10/100/1000Base-T PoE ports and 2*1000Base-X SFP slots, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply; Din-rail installation. Operation temperature: -40℃～+75℃
LT-IS3010GP-2GX8GT-SC/ST	Unmanaged industrial PoE switch with 8*10/100/1000Base-T PoE ports and 2*1000Base-X SC or ST ports, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V, redundant dual power supply, Din-rail installation; Multi-mode/Single mode/ dual fiber/single fiber, 550m -100KM optional; Operation temperature: -40℃～+75℃