Compact size 5*10/100Base-TX Industrial Ethernet Switch

LT-IS3005F-5TX-M-AD



Features:

- 5*10/100Base-TX RJ45 ports
- DC9-58V, AC 15~40V input, redundant power supply with polarity reverse protection
- Support 2Kbytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview


The SmartByte LT-IS3005F-5TX-M-AD is the compact size unmanaged industrial grade Ethernet switch with 5-port 10/100Base-TX RJ45. It is the high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power DC/AC input, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40 ℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial field where installation space are limited and restricted

Technical specification

Model No.	LT-IS3005F-5TX-M-AD	
Interface	Fiber port	Copper RJ45 ports
	0	5
Ethernet	5*10/100Base-TX RJ45	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet	
LED Indicators	P(Power indicator) Green	Off: the device is power off or failed
		On: the device power on is normal
	1-5(Copper ports) Green Link/act indicators	Off: ports link down
		On: ports link up
		Blinking: data on TX/RX
Power parameters		
Input voltage	Redundant power input DC 9-58V, AC 15~40V	
Input current	0.5A Max	
Total power consumption	Full loading ≤4W	
Connector	Removable 4-pin terminal block	
Reverse polarity protection	Support	
Switching features		
Switching capacity	1G	
Packet forwarding rate	0.744 Mpps	

MAC address table	2K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	2K
Forwarding delay	<10us
Jumbo Frame	Support 2Kbytes
MDI/MDIX	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H) mm	30*85*85mm
Weight	0.4 kg
Operating environment	
Operating temperature	-40℃~+ 75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us)
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/Reach/UKCA
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

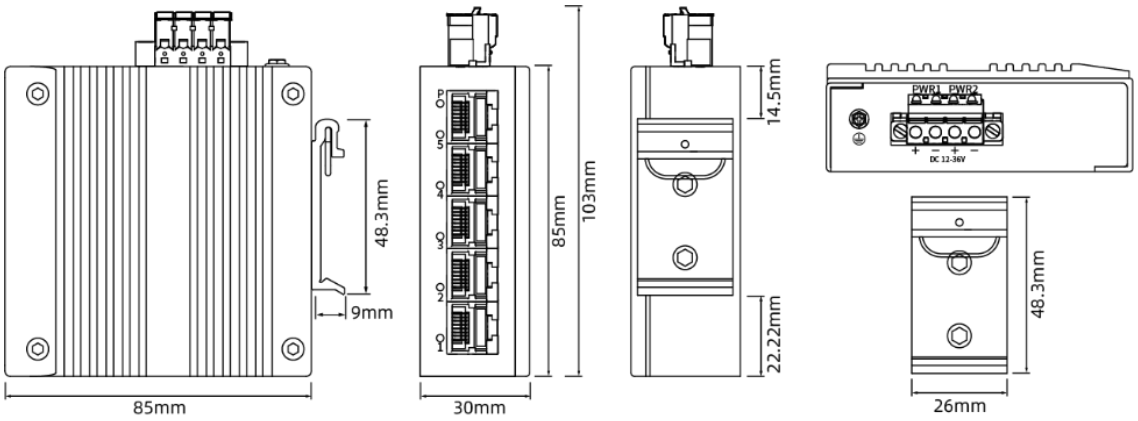

Order information

Model	Description
LT-IS3005F-5TX-M-AD	Compact size 5-port 10/100Base-TX RJ45 industrial Ethernet switch, DC 9-58V, AC 15~40V input, redundant dual power supply. Operation temperature: -40℃～+75℃