Compact size 5*10/100/1000Base-T Industrial Ethernet Switch

LT-IS3005G-5GT-M-AD



Features:

- 5*10/100/1000Base-T RJ45 ports
- DC9-58V, AC 15~40V input, redundant power supply with polarity reverse protection
- Support 2Kbytes Jumbo frame
- Support 4KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: -40 ℃ ~+75℃

Overview


The SmartByte LT-IS3005G-5GT-M-AD is the compact size unmanaged industrial grade Ethernet switch with 5-port 10/100/1000Base-T RJ45. It is the high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, such as wide range power DC/AC input, redundant power design with polarity reverse protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40 ℃ ~+75℃ as well as high-level EMI/EMC capability and so on. It is the best choice for heavy industrial field where installation space is limited and restricted

Technical specification

<table>
<tr><td>Model No.</td><td colspan="3">LT-IS3005G-5GT-M-AD</td></tr>
<tr><td rowspan="2">Interface</td><td>Fiber port</td><td colspan="2">Copper RJ45 ports</td></tr>
<tr><td>0</td><td colspan="2">5</td></tr>
<tr><td>Ethernet</td><td colspan="3">5*10/100/1000Base-T RJ45</td></tr>
<tr><td>Standard</td><td colspan="3">IEEE 802.3 10Base-T Ethernet
IEEE 802.3u Fast Ethernet
IEEE 802.3x Full-Duplex Flow Control
IEEE 802.3az Energy Efficient Ethernet</td></tr>
<tr><td rowspan="5">LED Indicators</td><td rowspan="2">P (Power indicator) Green</td><td colspan="2">Off: the device is power off or failed</td></tr>
<tr><td colspan="2">On: the device power on is normal</td></tr>
<tr><td rowspan="3">1-5(Copper ports) Green
Link/act indicators</td><td colspan="2">Off: ports link down</td></tr>
<tr><td colspan="2">On: ports link up</td></tr>
<tr><td colspan="2">Blinking: data on TX/RX</td></tr>
<tr><td colspan="4">Power parameters</td></tr>
<tr><td>Input voltage</td><td colspan="3">Redundant power input
DC 9-58V, AC 15~40V</td></tr>
<tr><td>Input current</td><td colspan="3">0.5A Max</td></tr>
<tr><td>Total power consumption</td><td colspan="3">Full loading ≤4W</td></tr>
<tr><td>Connector</td><td colspan="3">Removable 4-pin terminal block</td></tr>
<tr><td>Reverse polarity protection</td><td colspan="3">Support</td></tr>
<tr><td colspan="4">Switching features</td></tr>
<tr><td>Switching capacity</td><td colspan="3">10G</td></tr>
<tr><td>Packet forwarding rate</td><td colspan="3">14.8 Mpps</td></tr>
</table>

MAC address table	2K
VLAN	Support the transmission of the packets with VLAN tags ranging from 1 to 4096
Buffer	2K
Forwarding delay	<10us
Jumbo Frame	Support 2Kbytes
MDI/MDIX	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H) mm	30*85*85mm
Weight	0.4 kg
Operating environment	
Operating temperature	-40℃~+ 75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5 Level 3 (4KV/2KV) （8/20us)
	Surge protection of Ethernet ports: IEC 61000-4-5 Level 3 (4KV/2KV) （10/700us)
	ESD: IEC 61000-4-2 Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS/Reach/UKCA
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

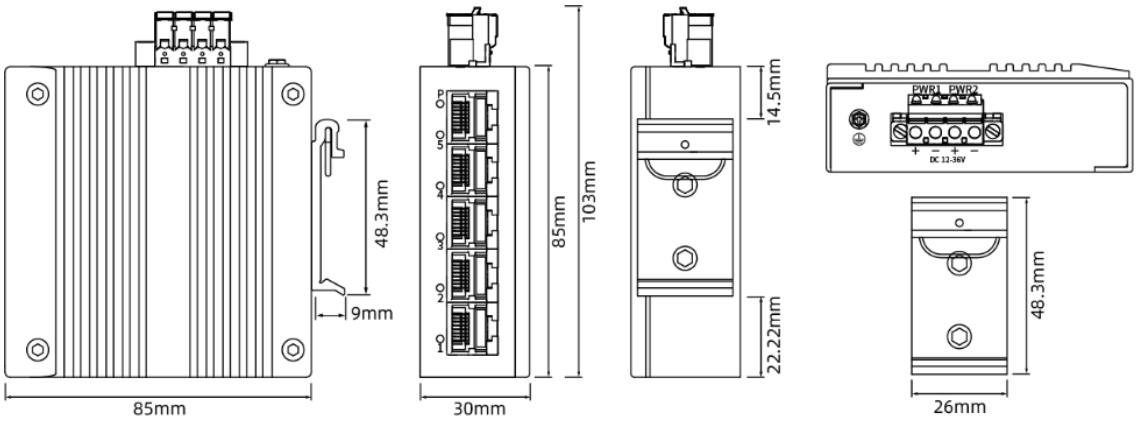

Order information

Model	Description
LT-IS3005G-5GT-M-AD	Compact size 5-port 10/100/1000Base-T RJ45 industrial Ethernet switch, DC 9-58V, AC 15~40V input, redundant dual power supply. Operation temperature: -40℃～+75℃