Compact size Industrial Boost Power Adapter

LT-IBPA52-1O2-M



Features:

- Allow low input voltage, such as 12/24/48VDC be boost up to 52VDC to meet IEEE802.3af/IEEE802.3at/bt PoE requirement
- 1*DC 12-48V input, 2*DC 52V output
- DC 12-23V input support Max 60W PoE budget; DC 24-48V input support Max 120W PoE budget;
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design with compact size(30*85*85mm)
- Operation temperature: -40 ℃ ~+75℃

Overview

The SmartByte LT-IBPA52-1O2-M is the compact size industrial booster power adapter with 1-port DC 12-48V input, 2-port DC 52V output. It is the ideal PoE solution that if the power source is less than 40V, the LT-IBPA52-1O2-M can booster the power source to redundant 52V output. The Max PoE power budget can be 60W if input voltage is DC 12-23V and Max PoE power budget can be 120W if input voltage is DC 24-48V


LT-IBPA52-1O2-M is also high cost-effective easy-to-use device, which is specifically designed with durable components and strong housing case to operate reliably in electrically harsh and climatically demanding environments in a wide temperature range of -40 to 75 degrees. The LT-IBPA52-1O2-M is packaged in a compact, IP40 rugged case that allows either DIN-rail or wall mounting to have the efficient use of cabinet space. It is ideal for service providers, campuses and public areas to deploy PoE wireless access points, IP cameras or IP phones in any places easily and efficiently.

Technical specification

Model No.	LT-IBPA52-1O2-M	
Interface	DC Input	DC Output
	1*12-48V	2*52V
LED Indicators	PWR(Power indicator) Green	Off: the device is power off or failed
		On: the device power on is normal
Power parameters		
Input voltage	12-48VDC	
Input current	5.7A---12V input, 60W output 5.4A---24V input, 120W output 2.7A---48v input, 120w output	
Output voltage	52V±10%	
Output power	60W ---12V input 120W---24-48V input	
Connector	Removable 2-pin terminal block	
Reverse polarity protection	Support	
Over-current protection	7.5A input	
Mechanical structure		
Case protection	IP40	

Installation method	Din-rail
Dimension(W*D*H)mm	30*85*85mm
Weight	0.2 kg
Operating environment	
Operating temperature	-40℃~+75℃
Storage/transportation temperature	-40℃~+85℃
Relative humidity	5%~95%（non-condensing）
Industrial Standard	Surge protection of power: IEC 61000-4-5　6KV/4KV（8/20us）
	DIP: IEC 61000-4-11　Level 3（10V）
	ESD: IEC 61000-4-2　Level 4（8K/15K）
	Shock：IEC 60068-2-27
	Free fall：IEC 60068-2-32
	Vibration：IEC 60068-2-6
Certification	CCC/CE/FCC/RoHS
Warranty	5 years

Structure diagram

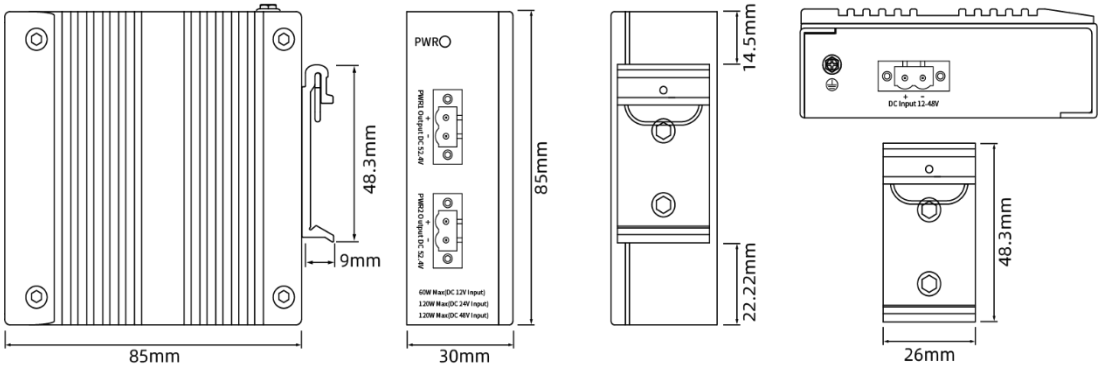

Order information

Model	Description
LT-IBPA52-1O2-M	Compact size industrial booster power adapter, one DC12-48V input, redundant DC 52V output; Support PoE power budget Max 120W; Operation temperature: -40℃～+75℃