2.4G Outdoor 300M Wireless Bridge



Product Highlights

- 1*10/100Mbps port
- Supporting IP65 protection level shell design, easily adapting to various harsh outdoor environments
- Support Standard PoE remote power supply and DC 12V local power supply
- Support 802.11n WiFi 300M wireless transmission
- Paired with high gain antennas, the transmission distance can reach 500m in an open and unobstructed environment
- Support wall mounted and pole mounted installation methods, with simple construction
- Automatically selects channels to ensure stable signal
- Compatible with mainstream cameras on the market
- No configuration required, easy to use

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

Hardware Features

Description	Specification
Model	HR-CPE30B-05P
Interface	1*10/100Mbps PoE port
Port Standard	IEEE802.3 (Ethernet), IEEE802.3u (Fast Ethernet)
Reset	Long press for 10 seconds to restore factory settings
DIP Switch	Master/Slave mode switch (Left: Master, Right: Slave)
Power Specification	DC 12V 0.5A
Power Interface	DC jack, 5.5mm outer diameter, 2.1mm inner diameter
Power Supply	Supports Standard and DC 12V power supply
Antenna	Built-in dual-polarized 6dBi directional panel antenna (Horizontal angle 70°, vertical angle 60°)
MIMO	2x2 MIMO
Maximum Transmit Power	20dBm
Maximum Power	3W
Frequency Range	2.4~2.4835GHz
Supported Channels	China: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 USA: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11
Modulation Modes	IEEE802.11b: DSSS (DQPSK, DBPSK, CCK) IEEE802.11g: OFDM (BPSK, QPSK, 16-QAM) IEEE802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Transmission Speed	11b max 11Mbps, 11g max 54Mbps, 11n max 300Mbps
Receive Sensitivity	11b: ≤-97±1.5dBm @1Mbps, ≤-87±1.5dBm @11Mbps 11g: ≤-92±1.5dBm @6Mbps, ≤-75±1.5dBm @54Mbps 11n 20MHz: ≤-91±1.5dBm @MCS0, ≤-72±1.5dBm @MCS7 11n 40MHz: ≤-88±1.5dBm @MCS0, ≤-69±1.5dBm @MCS7
Transmit Power	11b: ≥18±1.5dBm @11Mbps 11g: ≥17dBm ±1.5dBm @54Mbps 11n: ≥15dBm ±1.5dBm @MCS7

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

Hardware Features

Description	Specification
Transmission Distance	500 meters
Certification	FCC, CE, RoHS
Enclosure Material	ABS
IP Rating	IP65
Pole Mount Diameter	14~60mm
Installation	Pole-mount, wall-mount
Electrostatic Protection	Contact ±6KV; Air ±10KV
Operating Temperature	-30~55°C
Storage Temperature	-40~70°C
Operating Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
Structure Information	Product Dimensions: 140.52*77.39*53.23mm Packaging Dimensions: 145*196*90㎜ Product Net Weight: 0.13KG*2 Product Gross Weight: 0.56KG
Packing Information	Carton Dimensions: 465*310*425mm Packing Quantity: 20PCS Packing Weight: 12.2KG
Package Contents	Device ×2, Manual ×1, Certificate of Inspection ×1, Cable ties ×2, Power adapter ×2, Passive PoE injector ×1


Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

Software Features

Description	Specification
Operating Mode	Bridge Access Point, Bridge Client
Forwarding Mode	Bridge / Routing (NAT)
Networking Mode	Point-to-Point, Point-to-Multipoint
Wireless Settings	802.11b/g/n mode, Auto channel selection, On-site channel analysis, Transmit power adjustment Wireless security: WPA/WPA2, WPA-PSK/WPA2-PSK (AES/TKIP) encryption SSID broadcast/hide, Channel bandwidth selection, AP isolation, WMM Wireless MAC address filtering
Country code	China, USA
LAN Settings	IP address, Subnet mask, Gateway, DNS
WiFi Bridging	Custom bridge SSID, Interference signal viewer, One-click channel optimization
WiFi Management	Enable/disable, Configure independent management SSID, Hide SSID, Management policy (manage master device or device group)
RF Settings	Bandwidth switching, Channel switching, 3-level power adjustment
Packet Control	Multicast packet flow control, Broadcast packet flow control
Multi-language	Chinese / English
Status Monitoring	System status, Bridge status, Interface status
Access Control	MAC-based access control (effective on management WiFi)
Tools & Management	Ping test, Tracert, Domain name query
System Management	Reboot, Restore factory settings, Change password, Backup/restore, Firmware upgrade, Time settings, Management IP settings

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

Product Structure Diagram

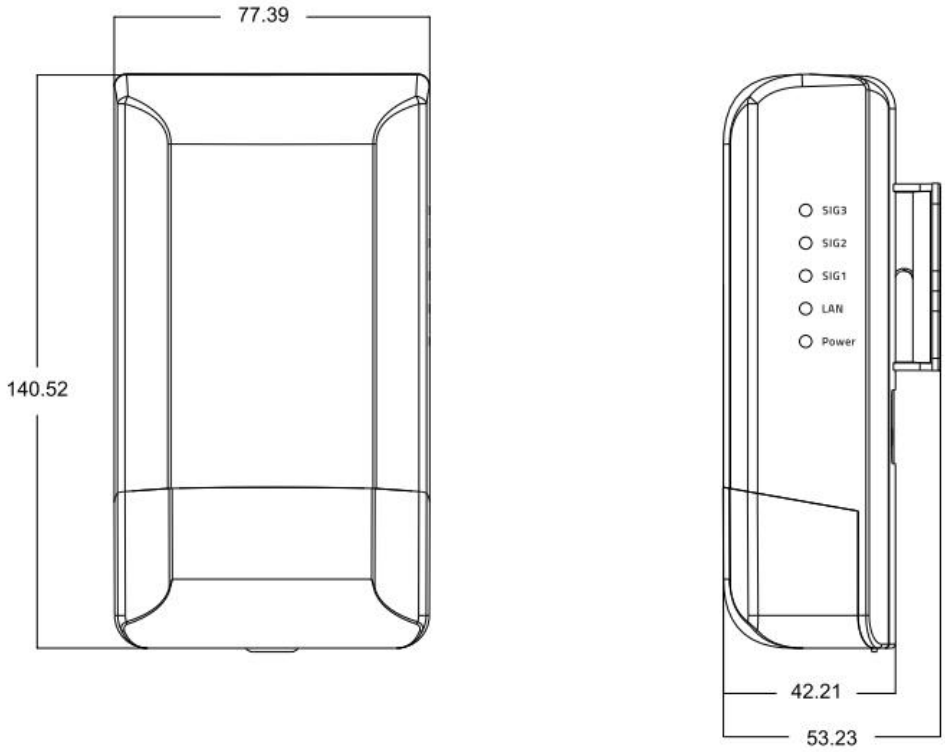

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd