
# 16-Port Gigabit and 2-Port 2.5G SFP PoE Switch

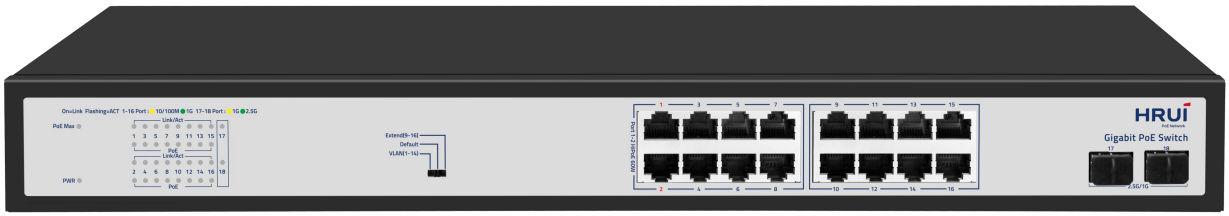


## Product Highlights

- 16*1Gbps PoE ports+2*2.5Gbps SFP ports
- Support IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3ab, IEEE802.3z
- Ethernet Ports support 10/100/1000Mbps self-adaptive
- Support automatic port flipping (Auto MDI/MDIX)
- Adopt a storage and forwarding exchange mechanism
- PoE ports automatically enable PoE watchdog mode in Extend and VLAN modes
- Support loop protection function
- The panel indicator LEDs will monitor the working status and assist in fault analysis
- Ports 1-2 support HiPoE 60W
- Support PoE priority to be enabled by default, with a priority order of 1-16

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

## Hardware Features

| Description | Specification |
|---|---|
| Model | HR200P-16T2MS-280 |
| Interface | 16*1Gbps PoE ports<br>2*2.5Gbps SFP ports |
| Port Standard | IEEE 802.3: Ethernet Media Access Control (MAC) Protocol<br>IEEE 802.3i: 10BASE-T Ethernet<br>IEEE 802.3u: 100BASE-TX Fast Ethernet<br>IEEE 802.3ab: 1000BASE-T GigabitEthernet<br>IEEE 802.3z: 1000BASE-X Gigabit Ethernet (Fiber optic)<br>IEEE 802.3x: Flow Control |
| Switching Bandwidth | 42Gbps |
| Packet Forwarding Rate | 31.24Mpps |
| Packet Buffer | 8.4Mbit |
| MAC Address Table | 16K |
| Jumbo Frame | 12Kbytes |
| VLAN | VLAN range 1-4094, maximum active VLAN is 31 |
| Transmission Method | Store and Forward |
| PoE Standard | IEEE802.3af (15.4W)<br>IEEE802.3at (30W) |
| PoE Port Output Voltage | DC 44-57V |
| PoE Ports | Ports 3-16 PoE power output <30W<br>Port 1-2 supports HiPoE 60W |
| PoE Power Budget | 265W |
| Power Supply | AC 100-240V 50/60Hz<br>DC 53.5V 5.23A |
| Mainboard Power Consumption | 10.4W |
| Structure Information | Product Dimensions: 440*204*44mm<br>Packaging Dimensions: 500*290*85mm<br>Product Net Weight: 2.8KG<br>Product Gross Weight: 3.38KG |
| Packing Information | Carton Dimensions: 520*445*310mm<br>Packing Quantity: 5PCS<br>Packing Weight: 18KG |


Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

## Hardware Features

| Description | Specification |
|---|---|
| Package Contents | Switch 1pcs, Power Cord 1pcs, Manual 1pcs, Certificate of Inspection 1pcs, Rack-mounting kit 1pair |
| Fan Quantity | 1 |
| Installation | Desktop, Rack-mounting |
| Surge Protection | Port Surge: Common mode 6KV, Differential mode 2KV (Class C)<br>Electrostatic ESD: Air 8KV, Contact 6KV (Class B)<br>Power Supply: Common mode 4KV, Differential mode 2KV (Class C) |
| Operating Temperature | 0~40°C |
| Storage Temperature | -40~70°C |
| Operation Humidity | 10%~90%, non condensing |
| Storage Humidity | 5%~95%, non condensing |
| PWR Green LED | On: Powered on<br>Off: Powered off |
| Ports 1-16 | Green LED on: 1Gbps Link normal<br>Yellow LED on: 10/100Mbps Link normal<br>Off: Link blocked<br>Flashing: Data transmitting<br>Slow Flashing: When a local or cross-product loop is detected, the port will flash slowly |
| PoE Yellow LED | On: PoE powered on<br>Off: PoE powered off |
| Ports 17-18 | Green LED on: 2.5Gbps Link normal<br>Yellow LED on: 1Gbps Link normal<br>Off: Link blocked<br>Flashing: Data transmitting |
| PoE Max Green LED | Off: Indicate that the PoE power usage is less than 90%<br>Flashing(Once per second): Indicate that the PoE power usage of 90% ≤ P ≤ 95%<br>On: Indicate that the PoE power is used at 95%<P<100% |
| VLAN/Default/Extend Modes Buttons | VLAN: VLAN mode, ports 1-14 are isolated from each other, communicating with ports 15-18, and automatically activate the PoE watchdog mode<br>Default: Normal mode, all ports can communicate with each other, transmission distance is within 100 meters, transmission rate is 10/100//1000Mbps adaptive(PoE Watchdog off)<br>Extend: Extend mode, when the PoE port is in Extend mode, ports 9-16 force 10Mbps to extend the transmission distance to 250meters, and automatically activate the PoE watchdog mode |

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd


# Product Structure Diagram

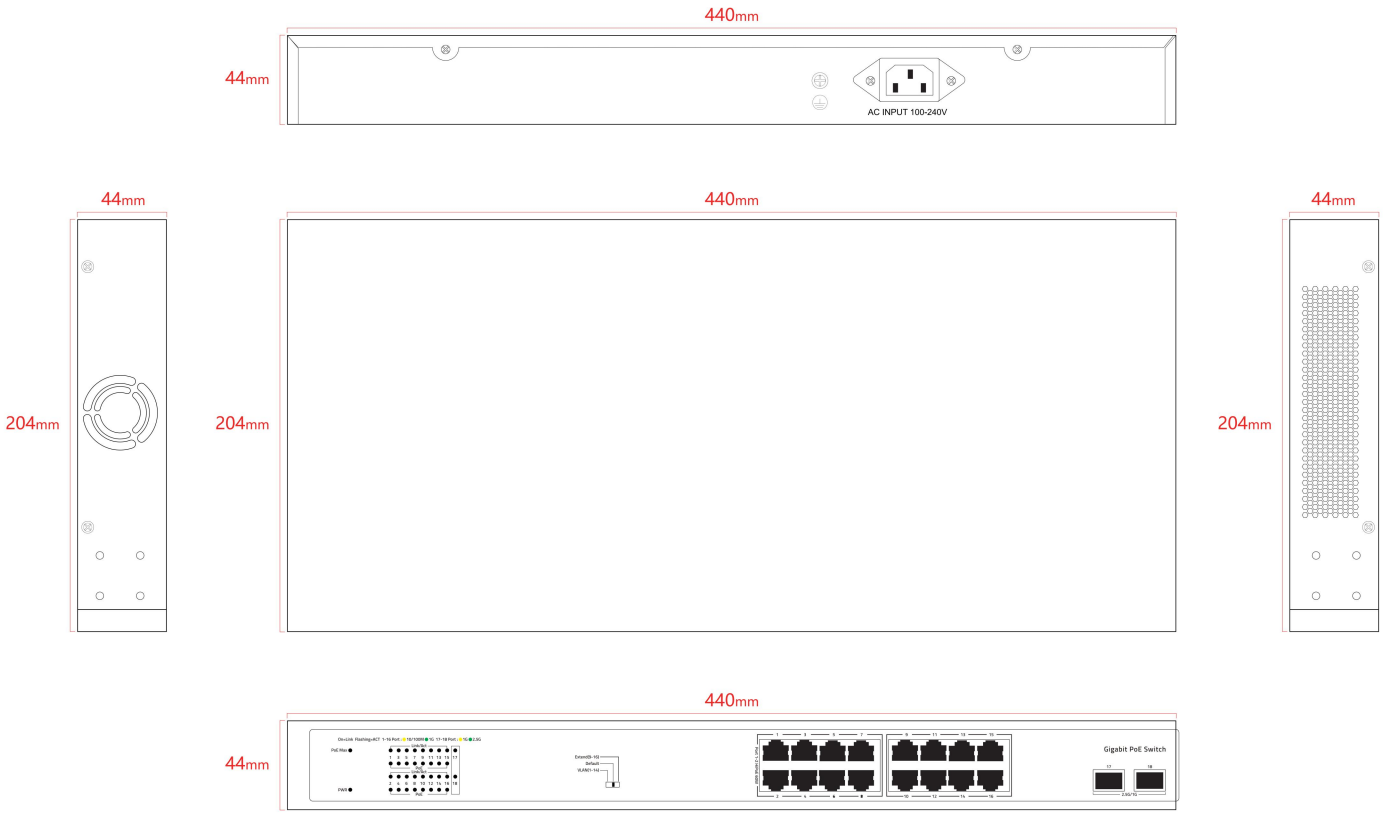


Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

# Mounting ear diagram (Standard, support to install on the cabinet)
## Unit of size: mm

### Rack mounting ears

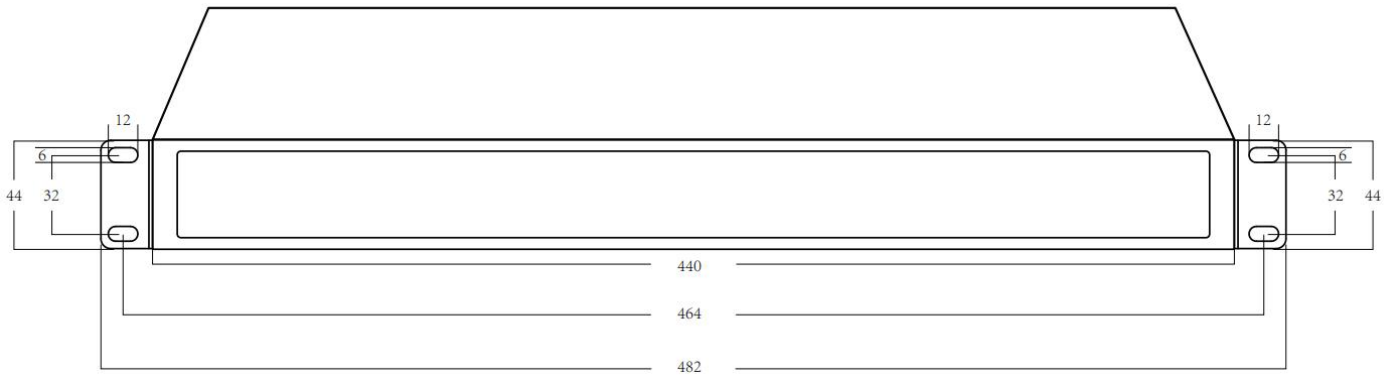


Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd