6-Port 10G Web Managed PoE Switch



Product Highlights

- 4*10Gbps PoE ports+2*10Gbps SFP+ ports
- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3ae, IEEE 802.3x standards
- Ethernet Ports support 100M/1G/2.5G/5/10Gbps self-adaptive
- SFP+ ports support manual switching between 1G/10Gbps or 2.5G/10Gbps
- Support automatic port flipping (Auto MDI/MDIX)
- The panel indicator LED will monitor the working status and assist in fault analysis
- Flow control method, full duplex adopts IEEE802.3x standard, and half duplex adopts Backpressure standard
- Support QoS data priority
- Support web management
- Ports 1-4 support BT90W power supply

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Hardware Features

Description	Specification
Model	HR510P-4T2XS-150
Interface	4*10Gbps PoE ports 2*10Gbps SFP+ ports
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3ab (Gigabit Ethernet) IEEE 802.3bz (5G Ethernet) IEEE 802.3z (Gigabit Ethernet) IEEE 802.3ae (10G Ethernet) IEEE802.3x (Flow Control)
Switching Bandwidth	120Gbps
Packet Forwarding Rate	89.28Mpps
Packet Buffer	12Mbit
MAC Address Table	16K
VLAN	VLAN range 1-4094, maximum active VLAN is 4K
Jumbo Frame	12KBytes
Transmission Method	Store and Forward
PoE Standard	IEEE802.3af (15.4W) IEEE802.3at (30W) IEEE802.3bt (90W)
PoE Port Output Voltage	DC 44-57V
PoE Ports	Ports 1-4 support BT90W power supply
PoE Power Budget	125W
Surge Protection	Port Surge: Common mode 4KV, Differential mode 2KV(Class A) Electrostatic ESD: Air 8KV, Contact 6KV(Class B)
Operating Temperature	0~40°C
Storage Temperature	-40~70°C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
Power Supply	AC 100-240V 50/60Hz DC 53.5V 2.8A
Mainboard Power Consumption	24.3W
Structure Information	Product Dimensions: 290*200*44mm Packaging Dimensions: 370*290*85mm Product Net Weight: 1.58KG Product Gross Weight: 2.12KG

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Description	Specification
Packing Information	Carton Dimensions: 445*310*390mm Packing Quantity: 5PCS Packing Weight: 11.06KG
Package Contents	Switch 1pcs, Power Cord 1pcs, Manual 1pcs, Certificate of Inspection 1pcs, Rack-mounting kit 1 pair
Fan Quantity	1
Installation	Desktop, Rack-mounting
PWR Green LED	On: Powered on Off: Powered off
SYS Green LED	On: The system is normal Flashing: System startup in progress
Ports 1-4	Green LED on: 10Gbps Link normal Yellow LED on: 100M/1G/2.5/5Gbps Link normal Off: Link blocked Flashing: Data transmitting
Ports 5-6	Green LED on: 10Gbps Link normal Yellow LED on: 1G/2.5Gbps Link normal Off: Link blocked Flashing: Data transmitting
PoE Yellow LED	On: PoE powered on Off: PoE powered off
Reset	Long press for 6 seconds to restore factory settings

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

L2 Function	
Port	Port Switch configuration Port Description Port Speed configuration Port Duplex configuration Port Flow Control configuration EEE Jumbo Frame
Link Aggregation	Support load balance policy; Base on MAC and IP-MAC Static and Dynamic Group LACP Up to 8 groups
Storm Control	Boardcast suppression Unknown Multicast Unknown Unicast
Port Mirroring	One to one monitor Many to one monitor Ingress/Egress/Both Up to 4 session groups
Port Security	MAC Address Constraints Protect/Restrict/Shutdown
Port Isolation	Support
Port Rate-limit	Support
VLAN	Access/Trunk/Hybrid VLAN Tunnel (Q-in-Q Tunnel) VLAN range 1-4094, maximum active VLAN is 4K
MAC Address	Filtering MAC Address Static MAC address
Spanning Tree Protocol	STP/RSTP/MSTP BPDU Filter BPDU Guard Edge Port
LLDP	LLDP LLDP MED

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Software Features

Multicast	IGMP Snooping Router Port Static IGMP group address IGMP V1/V2/V3
QoS	Traffic classification, Supporting SP and WRR scheduling Port Priority 802.1P Priority IP DSCP Priority Priority Remarking Support up to 8 queues per port
ERPS	Main Ring
PoE	
PoE Configuration	PoE Temperature PoE Type/Level/Power/Voltage/Current PoE Switch PoE Watchdog PoE power AF/AT adaptation IEEE 802.3bt,compatible with IEEE 802.3af/802.3at PoE
Services	
Access Protocol	HTTP Session Timeout
Security	DHCP Snooping
Diagnostics	
Copper Test	Support
Ping	Support
Equipment Management	
Manager Access	HTTP SNMP
Time Synchronization	SNTP Manual Time
Loopback-detection	Support

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd


Software Features

Manager IP	Static Address Manager VLAN DNS DHCP Client
SNMP	V1/V2C/V3 Community V3 User Group Trap Host
SNMP MIB	RFC 1213 MIB-II RFC 1643 Ethernet MIB RFC 2863 Interface MIB
User Management	Support
Firmware Management	Firmware upgrade
Configuration Management	Upload/Backup Configuration
Save	Support
Restart	Support
Factory Defaults	Support

Standard Compliance
IEEE 802.3x flow control and back pressure
IEEE 802.3ad port trunk with LACP
IEEE 802.1D Spanning Tree Protocol
IEEE 802.1w Rapid Spanning Tree Protocol
IEEE 802.1p Class of Service
IEEE 802.1Q VLAN tagging
IEEE 802.1ab LLDP
IEEE 802.3af Power over Ethernet
IEEE 802.3at Power over Ethernet Plus
IEEE 802.3bt PoE++ Power over Ethernet Plus Plus
RFC 768 UDP
RFC 793 TFTP
RFC 791 IP
RFC 792 ICMP
RFC 2068 HTTP
RFC 1112 IGMP v1
RFC 2236 IGMP v2
RFC 3376 IGMP v3

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd


Product Structure Diagram

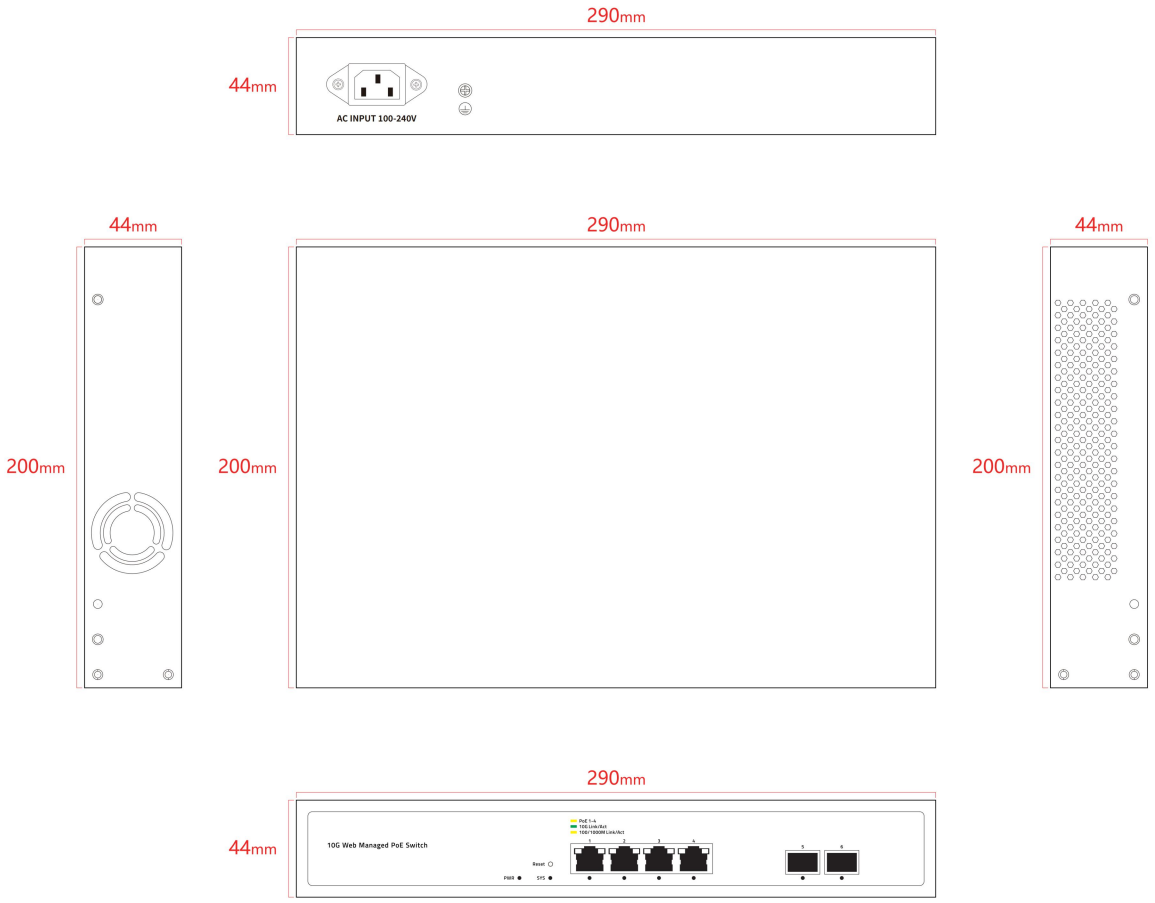

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd

Mounting ear diagram (Standard, support to install on the cabinet)
Unit of size: mm

Rack mounting ears

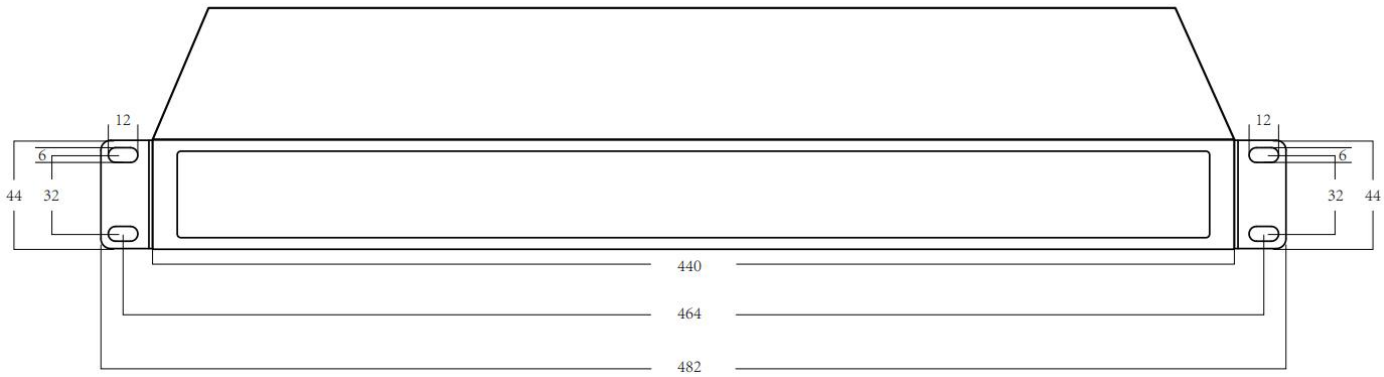

Copyright © 2024 Shenzhen HongRui Technology Co.,Ltd