# 24-Port 2.5G and 6-Port 10G SFP+ Managed PoE Switch




## Product Highlights

- Comply with IEEE 802.1d, IEEE 802.1w, IEEE 802.1s, IEEE 802.1p, IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3ae standards
- Support L3 management, DHCP Server, QoS, ACL control, SNMP V1/V2/V3, IGMP Snooping v1/v2
- Support Spanning Tree Protocol STP/RSTP/MSTP (ERPS), Loop Detection and Self Healing, and Remote Loop Monitoring and Control (802.3ah OAM)
- Support multiple VLAN partitions, including MAC VLAN and protocol VLAN
- Support IP address+MAC address+VLAN+port binding, DHCP Snooping, IP source and DAI protection
- Support IPV4/IPV6, RIP v1/v2, OSPFv2
- Support WEB, TELNET, CLI, SSH, SNMP, RMON management
- Comply with IEEE802.3af (15.4W), IEEE802.3at (30W), and IEEE802.3bt (90W)
- Support PoE watchdog, PoE port power supply and power configuration, PoE time management

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Hardware Features

| Description | Specification |
|---|---|
| Model | HR-AXGM-SWTG3624AS |
| Interface | 24*2.5Gbps PoE ports<br>6*10Gbps SFP+ ports<br>1*Console port |
| Port Standard | IEEE802.3 (Ethernet)<br>IEEE802.3u (Fast Ethernet)<br>IEEE 802.3ab (Gigabit Ethernet)<br>IEEE 802.3z (Gigabit Ethernet Fiber Standard)<br>IEEE 802.3ae (10G Ethernet)<br>IEEE802.3x (Flow Control)<br>IEEE 802.3az (Efficient and Energy saving Ethernet)<br>IEEE 802.3ad (Link Aggregation)<br>IEEE 802.1AB LLDP/LLDP MED (Link Layer Discovery Protocol)<br>IEEE 802.1D Spanning Tree Protocol<br>IEEE 802.1w Rapid Spanning Tree Protocol<br>IEEE 802.1s Multiple Spanning Tree Protocol (Fast Spanning Tree)<br>IEEE 802.1Q (Virtual Local Area Network)<br>IEEE 802.1p (VLAN Tag)<br>IEEE 802.1X (User Authentication) |
| Switching Bandwidth | 240Gbps |
| Packet Forwarding Rate | 178.56Mpps |
| Packet Buffer | 16Mbit |
| MAC Address Table | 32K |
| Jumbo Frame | 10Kbytes |
| VLAN | VLAN range 1-4094, maximum active VLAN is 4K |
| Transmission Method | Store and Forward |
| PoE Standard | IEEE802.3af (15.4W)<br>IEEE802.3at (30W)<br>IEEE802.3bt (90W) |
| PoE Port Output Voltage | DC 44-57V |
| PoE Ports | Ports 1-4 support BT90W power supply<br>Ports 5-24 PoE power output <30W |
| PoE Power Budget | 400W |
| Power Supply | AC 100-240V 50/60Hz<br>DC 56V7.15A&12V5A |
| Mainboard Power Consumption | 52.13W |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Hardware Features

| Description | Specification |
|---|---|
| Structure Information | Product Dimensions: 440*281*44mm<br>Packaging Dimensions: 500*365*85mm<br>Product Net Weight: 4.37KG<br>Product Gross Weight: 5.14KG |
| Packing Information | Carton Dimensions: 520*445*385mm<br>Packing Quantity: 5PCS<br>Packing Weight: 26.7KG |
| Package Contents | Switch 1pcs, Power Cord 1pcs, Manual 1pcs, Certificate of Inspection 1pcs, Rack-mounted kit 1 pair |
| Fan Quantity | 2 |
| Installation | Desktop, Rack-mounting |
| Surge Protection | Port Surge: Common mode 6KV, Differential mode 2KV (Class B)<br>Electrostatic ESD: Air 8KV, Contact 6KV (Class B) |
| Operating Temperature | 0~40°C |
| Storage Temperature | -40~70°C |
| Operation Humidity | 10%~90%, non condensing |
| Storage Humidity | 5%~95%, non condensing |
| PWR Green LED | On: Powered on<br>Off: Powered off |
| Ports 1-24 | Green LED on: 2.5Gbps Link normal<br>Yellow LED on: 10/100/1000Mbps Link normal<br>Off: Link blocked<br>Flashing: Data transmitting |
| SYS Green LED | Flashing: System startup in progress<br>On: The system is running normally |
| PoE Yellow LED | On: PoE powered on<br>Off: PoE powered off |
| Ports 25-30 | Blue LED on: 10Gbps Link normal<br>Green LED on: 1G/2.5Gbps Link normal<br>Off: Link blocked<br>Flashing: Data transmitting |
| PoE Max Green LED | Off: Indicate that the PoE power usage is less than 80%<br>On: Indicate that the PoE power is used at P>80% |
| Reset | Long press for 6 seconds to restore factory settings |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Software Features

| | |
|---|---|
| L3 Function | |
| IPv4 | IPv4 VLAN Interface |
| | IPv4 Static Routes |
| | ARP |
| IPv6 | IPv6 VLAN Interface |
| | IPv6 Static Routes |
| | IPv6 ND |
| RIP | V1/V2 |
| OSPF | Router-ID |
| | Authentication |
| | V2 |
| L2 Function | |
| Port | Port Switch configuration |
| | Port Description configuration |
| | Port Speed configuration |
| | Port Duplex configuration |
| | Port Flow Control configuration |
| | Support 10G/2.5G |
| | Jumbo Frame, Up to 10K |
| | EEE |
| | Fiber Module(DDM) |
| Link Aggregation | Support load balance policy; Base on MAC and IP-MAC |
| | Static and Dynamic Group |
| | Support LACP |
| | Up to 8 groups |
| Storm Control | Boardcast suppression |
| | Unknown Multicast |
| | Unknown Unicast |
| Port Mirroring | One to one monitor |
| | Many to one monitor |
| | Ingress/Egress/Both |
| | Up to 4 session groups |
| Port Security | MAC Address Constraints |
| | Port Security MAC Address |
| | Protect/Restrict/Shutdown |
| Port Isolation | Support |
| Port Rate-limit | Support |
| Loopback Detection | Support |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Software Features

| | |
|---|---|
| VLAN | Access/Trunk/Hybrid<br>VLAN Tunnel (Q-in-Q Tunnel)<br>VLAN range 1-4094, maximum active VLAN is 4K<br>Voice VLAN<br>MAC VLAN<br>Surveillance VLAN<br>Protocol VLAN<br>GVRP |
| MAC Address | Dynamic MAC address<br>Static MAC address<br>Filtering MAC Address |
| Spanning Tree Protocol | STP/RSTP/MSTP<br>BPDU Filter<br>BPDU Guard<br>Edge Port |
| LLDP | LLDP<br>LLDP MED |
| Multicast | IGMP Snooping<br>IGMP V1/V2/V3<br>Router Port<br>Static IGMP group address<br>IGMP groups filtering<br>Querier<br>MLD Snooping<br>MVR |
| QoS | Traffic classification based, Strict priority and WRR<br>Port Priority<br>802.1P Priority<br>IP TOS Priority<br>IP DSCP Priority<br>Support up to 8 queues per port<br>Priority Remarking |
| ERPS | Only SFP port |
| Services | |
| DHCP | DHCP Server<br>IP Pool<br>Static Binding<br>Option 43<br>DHCP Relay |
| Access Protocol | HTTP<br>HTTPS<br>Telnet<br>SSHv2<br>Manager ACL<br>Session Timeout<br>Password Retry Count<br>Silent Time |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Software Features

| | |
|---|---|
| Security | |
| AAA | RADIUS<br>TACACS+<br>802.1X<br>Base on port/MAC/local/WEB |
| DHCP Snooping | Global/VLAN<br>Option 82<br>Circuit ID |
| IP Source Guard | Support |
| Dynamic ARP Inspection | Support |
| DoS | Support |
| ACL | MAC ACL<br>IPv4 ACL<br>IPv6 ACL |
| Diagnostics | |
| Syslog | Logging Message<br>Remote Server |
| Ping | Support |
| Traceroute | Support |
| Copper Test | Support |
| UDLD | Support |
| Equipment Management | |
| Manager Access | Console<br>HTTP/HTTPS<br>Telnet<br>SSH<br>SNMP |
| Manager IP | Static Address<br>DHCP Client<br>Support IPv4 and IPv6 address<br>Manager VLAN<br>DNS |
| Time Synchronization | SNTP<br>Manual Time |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Software Features

| | |
|---|---|
| SNMP | V1/V2C/V3<br>Community<br>V3 User<br>Group<br>Trap Host |
| SNMP MIB | RFC 1213 MIB-II<br>RFC 1493 Bridge MIB<br>RFC 1643 Ethernet MIB<br>RFC 2819 RMON MIB (Groups 1, 2, 3 and 9)<br>RFC 2863 Interface MIB<br>LLDP<br>Private MIB |
| RMON | Statistics<br>History Configuration<br>Event Configuration<br>Alarm Configuration |
| User Management | Support |
| Firmware Management | Firmware upgrade<br>Double Image; Swap between Active and Alternate firmware image |
| Configuration Management | Upload and download<br>Upload and download via USB interface |
| Save | Support |
| Restart | Support |
| Factory Defaults | Support |


Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

## Software Features

| Standard Compliance |
| --- |
| IEEE 802.3x flow control and back pressure |
| IEEE 802.3ad port trunk with LACP |
| IEEE 802.1D Spanning Tree Protocol |
| IEEE 802.1w Rapid Spanning Tree Protocol |
| IEEE 802.1s Multiple Spanning Tree Protocol |
| IEEE 802.1p Class of Service |
| IEEE 802.1Q VLAN tagging |
| IEEE 802.1x Port Authentication Network Control |
| IEEE 802.1ab LLDP |
| RFC 768 UDP |
| RFC 793 TFTP |
| RFC 791 IP |
| RFC 792 ICMP |
| RFC 2068 HTTP |
| RFC 1112 IGMP v1 |
| RFC 2236 IGMP v2 |
| RFC 3376 IGMP v3 |
| RFC 2710 MLD v1 |
| FRC 3810 MLD v2 |
| RFC 2328 OSPF v2 |

Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd

# Product Structure Diagram

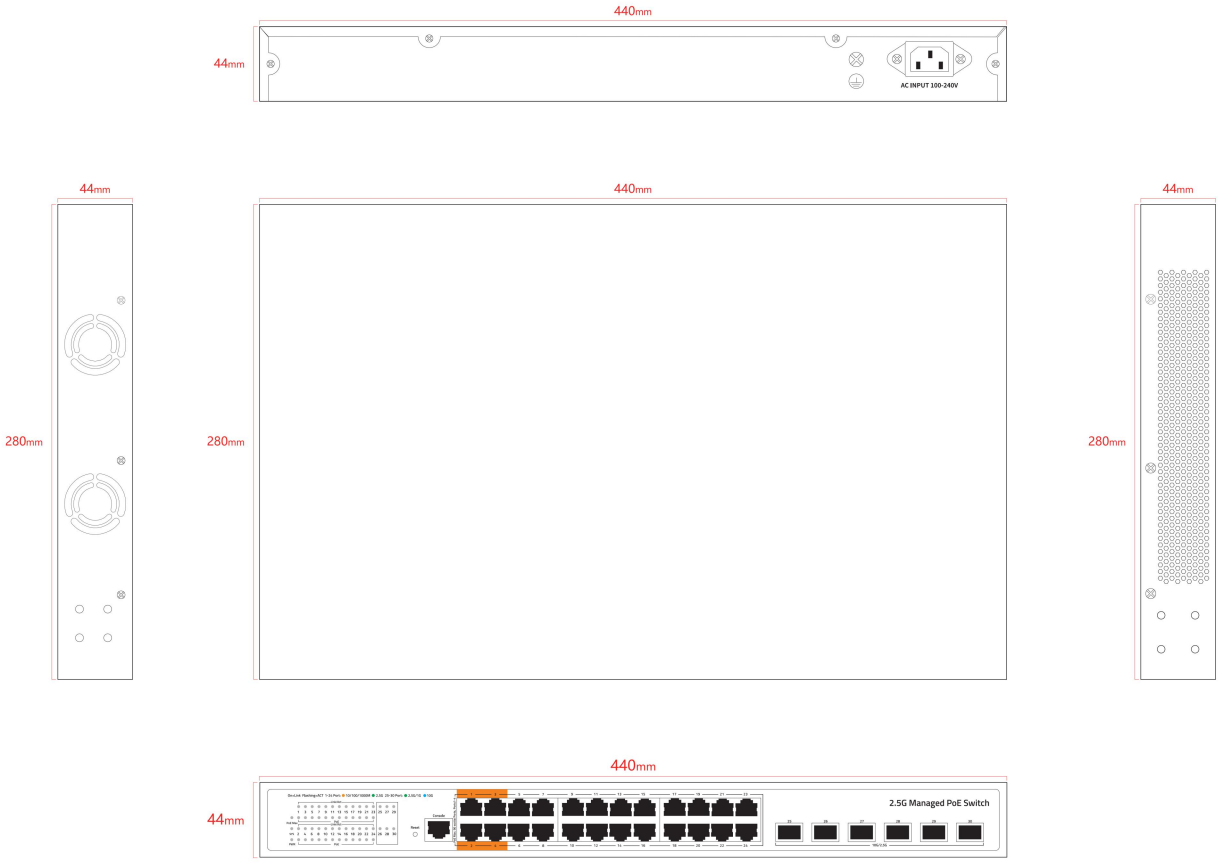


Copyright © 2024 Shenzhen HongRui Optical Technology Co.,Ltd