

# Implementation and Performance Analyses of a Highly Efficient Algorithm for Pressure-Velocity Coupling

Implementierung und Untersuchung einer hoch effizienten Methode zur  
Druck-Geschwindigkeits-Kopplung  
Master-Thesis von Fabian Gabel  
Tag der Einreichung:

1. Gutachten: Prof. Dr. rer. nat. Michael Schäfer
2. Gutachten: Dipl.-Ing Ulrich Falk



TECHNISCHE  
UNIVERSITÄT  
DARMSTADT

Studienbereich CE  
FNB

Implementation and Performance Analyses of a Highly Efficient Algorithm for Pressure-Velocity Coupling  
Implementierung und Untersuchung einer hoch effizienten Methode zur Druck-Geschwindigkeits-Kopplung

Vorgelegte Master-Thesis von Fabian Gabel

1. Gutachten: Prof. Dr. rer. nat. Michael Schäfer
2. Gutachten: Dipl.-Ing Ulrich Falk

Tag der Einreichung:

---

# Erklärung zur Master-Thesis

Hiermit versichere ich, die vorliegende Master-Thesis ohne Hilfe Dritter nur mit den angegebenen Quellen und Hilfsmitteln angefertigt zu haben. Alle Stellen, die aus Quellen entnommen wurden, sind als solche kenntlich gemacht. Diese Arbeit hat in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegen.

Darmstadt, den 21. Januar 2015

---

(Fabian Gabel)

---

---

## Contents

---

<b>Nomenclature</b>	<b>4</b>
<b>1 Introduction</b>	<b>5</b>
<b>2 Fundamentals of Continuum Physics for Thermo-Hydrodynamical Problems</b>	<b>6</b>
2.1 Conservation of Mass – Continuity Equation . . . . .	6
2.2 Conservation of Momentum – Cauchy-Equations . . . . .	6
2.3 Closing the System of Equations – Newtonian Fluids . . . . .	7
2.4 Conservation Law for Scalar Quantities . . . . .	7
2.5 Necessary Simplification of Equations . . . . .	7
2.5.1 Incompressible Flows and Hydrostatic Pressure . . . . .	8
2.5.2 Variation of Fluid Properties – The Boussinesq Approximation . . . . .	8
2.6 Final Form of the Set of Equations . . . . .	9
<b>3 Finite Volume Method for Incompressible Flows – Theoretical Basics</b>	<b>10</b>
3.1 Numerical Grid . . . . .	10
3.2 Approximation of Integrals and Derivatives . . . . .	11
3.3 Treatment of Non-Orthogonality of Grid Cells . . . . .	12
3.3.1 Minimum Correction Approach . . . . .	12
3.3.2 Orthogonal Correction Approach . . . . .	12
3.3.3 Over-Relaxed Approach . . . . .	12
3.3.4 Deferred Non-Orthogonal Correction . . . . .	12
3.4 Numerical Solution of Non-Linear Systems – Linearization Techniques . . . . .	13
3.5 Numerical Solution of Linear Systems . . . . .	13
3.5.1 Stone’s SIP Solver . . . . .	13
3.5.2 Krylov Subspace Methods . . . . .	13
<b>4 Implicit Finite Volume Method for Incompressible Flows – Segregated Approach</b>	<b>14</b>
4.1 Discretization of the Mass Balance . . . . .	14
4.2 A Pressure-Weighted Interpolation Method for Velocities . . . . .	14
4.3 Implicit Pressure Correction and the SIMPLE Algorithm . . . . .	17
4.4 Discretization of the Mass Fluxes and the Pressure Correction Equation . . . . .	18
4.5 Discretization of the Momentum Balance . . . . .	19
4.5.1 Linearization and Discretization of the Convective Term . . . . .	20
4.5.2 Discretization of the Diffusive Term . . . . .	20
4.5.3 Discretization of the Source Terms . . . . .	21
4.6 Discretization of the Pressure Correction Equation . . . . .	22
4.7 Discretization of the Temperature Equation . . . . .	22
4.8 Boundary Conditions . . . . .	22
4.9 Treatment of the Singularity of the Pressure Correction Equation with Neumann Boundaries . . . . .	22
4.10 Structure of the Assembled Linear Systems . . . . .	23
<b>5 Finite Volume Method for Incompressible Flows – Coupled Approach</b>	<b>24</b>
5.1 The Coupled Algorithm . . . . .	24
5.1.1 Pressure Equation . . . . .	24
5.1.2 Characteristic Properties of Coupled Solution Methods . . . . .	24
5.2 Coupling the Temperature Equation . . . . .	24
5.2.1 Decoupled Approach . . . . .	24
5.2.2 Velocity-Temperature Coupling . . . . .	24
5.2.3 Temperature-Velocity/Pressure Coupling – Newton-Raphson Linearization . . . . .	24
5.3 Boundary Conditions on Domain and Block Boundaries . . . . .	24
5.3.1 Dirichlet Boundary Condition for Velocity . . . . .	24
5.3.2 Wall Boundary Condition . . . . .	24
5.3.3 Block Boundary Condition . . . . .	24
5.4 Assembly of Linear Systems – Final Form of Equations . . . . .	24

<b>6</b>	<b>CAFFA Framework</b>	<b>25</b>
6.1	PETSc Framework	25
6.1.1	About PETSc	25
6.1.2	Basic Data Types	25
6.1.3	KSP and PC Objects and Their Usage	25
6.1.4	Profiling	25
6.1.5	Common Errors	25
6.2	Grid Generation and Conversion	25
6.3	Preprocessing	25
6.4	Implementation Details of CAFFA	25
6.4.1	MPI Programming Model	25
6.4.2	Convergence Control	26
6.4.3	Modi of Calculation	26
6.4.4	Indexing of Variables and Treatment of Boundary Values	26
6.4.5	Field Interlacing	26
6.4.6	Domain Decomposition, Exchange of Ghost Values and Parallel Matrix Assembly	26
6.5	Postprocessing	26
<b>7</b>	<b>Verification of the developed CAFFA Framework</b>	<b>27</b>
7.1	Theoretical Discretization Error	27
7.2	Method of Manufactured Solutions	27
7.3	Exact and Manufactured Solutions for the Navier-Stokes Equations and the Energy Equation	27
7.4	Measurement of Error and Calculation of Order	27
7.4.1	Testcase on Single Processor on Orthogonal Locally Refined Grid	27
7.4.2	Testcase on Multiple Processors on Non-Orthogonal Locally Refined Grid	27
7.5	Independence of Under-Relaxation Factor	27
<b>8</b>	<b>Comparison of Solver Concepts</b>	<b>28</b>
8.1	Convergence Behaviour on Locally Refined Block Structured Grids with Different Degrees of Coupling	28
8.2	Parallel Performance	28
8.2.1	Employed Hardware and Software – The Lichtenberg-High Performance Computer	28
8.2.2	Measures of Performance	28
8.2.3	Preliminary Upper Bounds on Performance – The STREAM Benchmark	28
8.2.4	Discussion of Results for Parallel Efficiency	28
8.2.5	Speedup Measurement for Analytic Test Cases	28
8.3	Test Cases with Varying Degree of Non-Linearity	28
8.3.1	Transport of a Passive Scalar – Forced Convection	28
8.3.2	Buoyancy Driven Flow – Natural Convection	28
8.3.3	Flow with Temperature Dependent Density – A Highly Non-Linear Test Case	28
8.4	Realistic Testing Scenarios – Benchmarking	28
8.4.1	Flow Around a Cylinder 3D – Stationary	29
8.4.2	Flow Around a Cylinder 3D – Instationary	29
8.4.3	Heat-Driven Cavity Flow	29
8.5	Realistic Testing Scenario – Complex Geometry	29
<b>9</b>	<b>Conclusion and Outlook</b>	<b>30</b>
	<b>References</b>	<b>31</b>
	<b>List of Figures</b>	
1	Comparison of vertex oriented and cell center oriented variable arrangement	10
2	Block structured grid consisting of two blocks	11
3	Minimum correction, orthogonal correction and over-relaxed approach	13
	<b>List of Tables</b>	
	<b>List of Algorithms</b>	
1	SIMPLE Algorithm	19

---

## Nomenclature

---

$Ma$	Mach number
$S$	Surface
$S_{ij}, i, j \in \{1, 2, 3\}$	Symmetric part of the transpose of the jacobian of the velocity
$T$	Temperature
$T_0$	Reference temperature
$V$	Volume
$\beta$	Coefficient of thermal expansion
$\delta_{ij}$	Kronecker-Delta
$\hat{p}$	Pressure without hydrostatic pressure part
$\kappa$	Thermal conductivity
$(\mathbf{e}_i)_{i=1,\dots,3}$	Cartesian canonical basis
$\mu$	Dynamic viscosity
$\rho$	Density
$\rho_0$	Reference density at $T_0$
$\sigma_{ij}, i, j \in \{1, 2, 3\}$	Deviatoric stress tensor
$\tau_{ij}, i, j \in \{1, 2, 3\}$	Coefficient matrix of stress mapping $T$
$\mathbf{T}$	Linear stress mapping
$\mathbf{g}$	Gravitational acceleration vector
$\mathbf{k}$	Mass specific force vector
$\mathbf{n}$	Surface normal unit vector
$\mathbf{t}$	Stress vector
$\mathbf{u}$	Velocity vector
$\mathbf{x}$	Coordinate Vector
$g_i, i \in \{1, 2, 3\}$	Components of the gravitational acceleration vector
$k_i, i \in \{1, 2, 3\}$	Mass specific force vector components
$n_i, i \in \{1, 2, 3\}$	Surface normal unit vector components
$p$	Pressure
$q_T$	Source or sink of heat
$t$	Time
$t_i, i \in \{1, 2, 3\}$	Stress vector components
$u_i, i \in \{1, 2, 3\}$	Cartesian velocity components
$x_i, i \in \{1, 2, 3\}$	Cartesian coordinates

---

## 1 Introduction

---

This thesis is about.

---

## 2 Fundamentals of Continuum Physics for Thermo-Hydrodynamical Problems

---

This section covers the set of fundamental equations for thermo-hydrodynamical problems which the numerical solution techniques of the following chapters are aiming to solve. Furthermore the notation regarding the physical quantities to be used throughout this thesis is introduced. The following paragraphs are based on (Kundu, Spurk, Ferziger, Anderson). For a thorough derivation of the matter to be presented the reader may consult the mentioned sources. Since the present thesis focusses on the application of finite-volume methods the focus lays on stating the integral forms of the relevant conservation laws. However in the process of deriving the final set of equations the use of differential formulations of the stated laws are required. Einstein's convention for taking sums over repeated indices is used to simplify certain expressions. For the remainder of this thesis non-moving inertial frames in a Cartesian coordinate system with the coordinates  $x_i$  are used. This approach is also known as *Eulerian approach*.

---

### 2.1 Conservation of Mass – Continuity Equation

---

The conservation law of mass embraces the physical concept that, neglecting relativistic and nuclear reactions, mass cannot be created or destroyed. Using the notion of a mathematical control volume, which is used to denote a constant domain of integration, one can state the integral mass balance of a control volume  $V$  with control surface  $S$  with surface normal unit vector  $\mathbf{n} = (n_i)_{i=1,\dots,3}$  using Gauss' theorem as

$$\iiint_V \frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_i} (\rho u_i) dV = \iiint_V \frac{\partial \rho}{\partial t} dV + \iint_S \rho u_i n_i dS = 0,$$

where  $\rho$  denotes the material density,  $t$  denotes the independent variable of time and  $\mathbf{u} = (u_i)_{i=1,\dots,3}$  is the velocity vector field. Since this equation remains valid for arbitrary control volumes the equality has to hold for the integrands as well. In this sense the differential form of the conservation law of mass can be formulated as

$$\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial x_i} (\rho u_i) = 0. \quad (1)$$

---

### 2.2 Conservation of Momentum – Cauchy-Equations

---

The conservation law of momentum, also known as Newton's Second Law, axiomatically demands the balance of the temporal change of momentum and the sum of all attacking forces on a body. Those forces can be divided into body forces and surface forces. Let  $\mathbf{k} = (k_i)_{i=1,\dots,3}$  denote a mass specific force and  $\mathbf{t} = (t_i)_{i=1,\dots,3}$  the stress vector. A first form of the integral momentum balance in the direction of  $x_i$  can be formulated as

$$\iiint_V \frac{\partial (\rho u_i)}{\partial t} dV + \iint_S \rho u_i (u_j n_j) dS = \iiint_V \rho k_i dV + \iint_S t_i dS.$$

In general the stress vector  $\mathbf{t}$  is a function not only of the location  $\mathbf{x} = (x_i)_{i=1,\dots,3}$  and of the time  $t$  but also of the surface normal unit vector  $\mathbf{n}$ . A central simplification can be introduced, namely Cauchy's stress theorem, which states that the stress vector is the image of the normal vector under a linear mapping  $\mathbf{T}$ . With respect to the Cartesian canonical basis  $(\mathbf{e}_i)_{i=1,\dots,3}$  the mapping  $\mathbf{T}$  is represented by the coefficient matrix  $(\tau_{ji})_{i,j=1,\dots,3}$  and Cauchy's stress theorem reads

$$\mathbf{t}(\mathbf{x}, t, \mathbf{n}) = \mathbf{T}(\mathbf{x}, t, \mathbf{n}) = (\tau_{ji} n_j)_{i=1,\dots,3}.$$

Assuming the validity of Cauchy's stress theorem one can derive Cauchy's first law of motion, which in differential form can be formulated as

$$\frac{\partial (\rho u_i)}{\partial t} + \frac{\partial}{\partial x_j} (\rho u_i u_j) = \rho k_i + \frac{\partial \tau_{ji}}{\partial x_j} \quad (2)$$

and represents the starting point for the modelling of fluid mechanical problems. One should note, that Cauchy's first law of motion does not take any assumptions regarding material properties, which is why the set of equations (1,2) is not closed in the sense that there exists a independent equation for each of the dependent variables.



---

### 2.3 Closing the System of Equations – Newtonian Fluids

---

As result of Cauchy's theorem the stress vector  $\mathbf{t}$  can be specified once the nine components  $\tau_{ji}$  of the coefficient matrix are known. As is shown in (Spurk usw.) by formulating the conservation law of angular momentum the coefficient matrix is symmetric,

$$\tau_{ji} = \tau_{ij}, \quad (3)$$

hence the number of unknown coefficients may be reduced to six unknown components. In a first step it is assumed that the coefficient matrix can be decomposed into fluid-static and fluid-dynamic contributions,

$$\tau_{ij} = -p\delta_{ij} + \sigma_{ij},$$

where  $p$  is the thermodynamic pressure,  $\delta_{ij}$  is the *Kronecker-Delta* and  $\sigma_{ij}$  is the so called *deviatoric stress tensor*.

For the fluids the studies that the present thesis performs it is sufficient to consider viscous fluids for which there exists a linear relation between the components of the deviatoric stress tensor and the symmetric part of the transpose of the jacobian of the velocity field  $(S_{ij})_{i,j=1,\dots,3}$ ,

$$S_{ij} = \frac{1}{2} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right).$$

If one now imposes material-isotropy and the mentioned stress-symmetry (3) restriction it can be shown (Aries) that the constitutive equation for the deviatoric stress tensor reads

$$\sigma_{ij} = 2\mu S_{ij} + \lambda S_{mm} \delta_{ij},$$

where  $\lambda$  and  $\mu$  denominate scalars which depend on the local thermodynamical state. Taking everything into account (2) can be formulated as the differential conservation law of momentum for newtonian fluids, better known as the *Navier-Stokes equations* in differential form:

$$\frac{\partial (\rho u_i)}{\partial t} + \frac{\partial}{\partial x_j} (\rho u_i u_j) = \rho k_i - \frac{\partial p}{\partial x_i} + \frac{\partial}{\partial x_j} \left( \mu \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \right) + \frac{\partial}{\partial x_i} \left( \lambda \frac{\partial u_m}{\partial x_m} \right) \quad (4)$$

---

### 2.4 Conservation Law for Scalar Quantities

---

The modelling of the transport of scalar quantities, convection, by a flow field  $\mathbf{u}$  is necessary if the fluid mechanical problem to be analyzed includes for example heat transfer. Other scenarios that involve the necessity to model scalar transport surge, when turbulent flows are to be modeled by two-equation models like the *k-ε-model* (REFERENCE,Pope).

Since this thesis focusses on the transport of the scalar temperature  $T$  this section introduces the conservation law for energy in differential form,

$$\frac{\partial (\rho T)}{\partial t} + \frac{\partial}{\partial x_j} \left( \rho u_j - \kappa \frac{\partial T}{\partial x_j} \right) = q_T, \quad (5)$$

where  $\kappa$  denotes the thermal conductivity of the modelled material and  $q_T$  is a scalar field representing sources and sinks of heat throughout the domain of the problem.

---

### 2.5 Necessary Simplification of Equations

---

Negligible viscous dissipation and pressure work source terms in the enery equation (vakilipour)

The purpose of this section is to motivate and introduce further common simplifications of the previously presented set of constitutive equations.

---

### 2.5.1 Incompressible Flows and Hydrostatic Pressure

---

A common simplification when modelling low Mach number flows ( $Ma < 0.3$ ), is the assumption of *incompressibility*, or the assumption of an *isochoric* flow. If one furthermore assumes homogeneous density  $\rho$  in space and time, a restrictive assumption that will be partially alleviated in the following section the continuity equation in differential form (1) can be simplified to

$$\frac{\partial u_i}{\partial x_i} = 0. \quad (6)$$

In other words: In order for a velocity vector field  $\mathbf{u}$  to be valid for an incompressible flow it has to be free of divergence, or *solenoidal* (Aries).

If furthermore, one assumes also constant dynamic viscosity  $\mu$ , which can be suitable in the case of isothermal flow or if the temperature differences within the flow are small, the Navier-Stokes equations in differential form can be reduced to

$$\frac{\partial (\rho u_i)}{\partial t} + \rho \frac{\partial}{\partial x_j} (u_i u_j) = \rho k_i - \frac{\partial p}{\partial x_i} + \frac{\partial}{\partial x_j} \left( \mu \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \right) \quad (7a)$$

$$= \rho k_i - \frac{\partial p}{\partial x_i} + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} \right) \quad (7b)$$

by using *Schwartz's* lemma to interchange the order of differentiation. A common simplification to further simplify the set of equations is the assumption of a volume specific force  $\rho \mathbf{k}$  that can be modelled by a potential, such that it can be represented as the gradient of a scalar field  $\Phi_{\mathbf{k}}$  as

$$-\rho k_i = \frac{\partial \Phi_{\mathbf{k}}}{\partial x_i}.$$

In the case of this thesis this assumption is valid since the mass specific force is the mass specific gravitational force  $\mathbf{g} = (g_i)_{i=1,\dots,3}$  and the density is assumed to be constant, so the potential can be modelled as

$$\Phi_g = -\rho g_j x_j.$$

This term can be interpreted as the hydrostatic pressure  $p_{hyd}$  and can be added to the thermodynamical pressure  $p$  to simplify calculations

$$\begin{aligned} \rho g_i - \frac{\partial p}{\partial x_i} &= \frac{\partial}{\partial x_i} (\rho g_j x_j) - \frac{\partial p}{\partial x_i} \\ &= \frac{\partial}{\partial x_i} (\rho g_j x_j) - \frac{\partial}{\partial x_i} (\hat{p} + p_{hyd}) \\ &= -\frac{\partial \hat{p}}{\partial x_i}. \end{aligned} \quad (8)$$

Since in incompressible fluids only pressure differences matter, this has no effect on the solution. After finishing the calculations  $p_{hyd}$  can be calculated and added to the resulting pressure  $\hat{p}$ .

---

### 2.5.2 Variation of Fluid Properties – The Boussinesq Approximation

---

If modelling of an incompressible flow involves heat transfer fluid properties like the density change with varying temperature. If the variation of temperature is small one can still assume a constant density to maintain the structure of the advection and diffusion terms in (4) and only consider the changes of the density in the gravitational term. If linear variation of density with respect to temperature is assumed this approximation is called *Boussinesq*-approximation. In this case the Navier-Stokes equations are formulated using a reference pressure  $\rho_0$  at the reference temperature  $T_0$  and the now temperature dependent density  $\rho$ , with

$$\rho(T) = \rho_0 (1 - \beta (T - T_0)). \quad (9)$$

Here  $\beta$  denotes the coefficient of thermal expansion. Under the use of the Boussinesq-approximation the incompressible Navier-Stokes equations in differential form can be formulated as

$$\begin{aligned}
\rho_0 \frac{\partial (u_i)}{\partial t} + \rho_0 \frac{\partial}{\partial x_j} (u_i u_j) &= \rho_0 g_i + (\rho - \rho_0) g_i - \frac{\partial p}{\partial x_i} + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \\
&= \frac{\partial}{\partial x_i} (\rho_0 g_j x_j) + (\rho - \rho_0) g_i - \frac{\partial p}{\partial x_i} + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \\
&= - \frac{\partial \hat{p}}{\partial x_i} + (\rho - \rho_0) g_i + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \\
&= - \frac{\partial \hat{p}}{\partial x_i} - \rho_0 \beta (T - T_0) + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right)
\end{aligned}$$

using  $\rho g$  as the mass specific force.

- Talk about natural and forced convection. Differences for the solver algorithm. (s.a.) Peric P447
- Talk about flows with variation in fluid properties -> mms has to map this behaviour (Buoyancy force driven, i.e. naturally convected fluid), mixed Convection
- Also talk about non-dimensional values like Prandtl number, Rayleigh and Reynolds
- Talk about the validity of this approximation

---

## 2.6 Final Form of the Set of Equations

---

In the previous subsections different simplifications have been introduced which will be used throughout the thesis. The final form of the set of equations to be used is thereby presented. As further simplification the modified pressure  $\hat{p}$  will be treated as  $p$  and since the use of the Boussinesq-approximation replaces the variable  $\rho$  by a linear function of the temperature  $T$  the reference pressure  $\rho_0$  for the remainder of this thesis will be referred to as  $\rho$ . Note that incompressibility has been taken into account:

$$\frac{\partial u_i}{\partial x_i} = 0. \quad (10a)$$

$$\rho \frac{\partial (u_i)}{\partial t} + \rho \frac{\partial}{\partial x_j} (u_i u_j) = - \frac{\partial p}{\partial x_i} - \rho \beta (T - T_0) + \mu \frac{\partial}{\partial x_j} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \quad (10b)$$

$$\frac{\partial (\rho T)}{\partial t} + \frac{\partial}{\partial x_j} \left( \rho u_j T - \kappa \frac{\partial T}{\partial x_j} \right) = q_T. \quad (10c)$$



Figure 1: Comparison of vertex oriented and cell center oriented variable arrangement

### 3 Finite Volume Method for Incompressible Flows – Theoretical Basics

This section deals with the fundamentals of the numerical solution via a finite volume method of the formerly presented set of partial differential equations. The focus of this section is, to provide an overview over the methods to be used in the present thesis. The information contained in this section is based on (Peric,Schäfer,Muzaferja,Jsak). The overview starts by mentioning the different grid types to be used and the discretization techniques to be applied. On the basis of integral formulations of the equations to be solved, the therein contained integrals and differential operators have to be discretized. Since the accuracy of the default concepts for discretizing differential operators degrades with decreasing grid quality, this chapter furthermore presents different approaches to handle corrections for cases in which the cause of degrading grid quality is increased non-orthogonality.

The goal of the finite volume method is to provide algebraic equations which can be used to determine an approximate solution of a partial differential equation. This system of linear algebraic equations can be solved by means of algorithms to be presented in the end of this section. However since the Navier-Stokes equations are in general non-linear an intermediate step has to be taken, by linearizing the discrete equations. This leads to the need of an iteration process, the *Picard iteration*, which will be explained briefly.

#### 3.1 Numerical Grid


In this subsection a brief overview of the general grid structure to be used in the present thesis is given. The main idea behind finite volume methods is to solve partial differential equations by integrating them over the specified continuous problem domain and dividing this domain into a finite number of subdomains, the so called control volumes. The result of the this finite partition of a continuous problem domain is called the numerical grid. The grid consists of a finite number of grid cells which represent the boundaries of a discrete domain of integration. Depending on whether the numerical solution of an equation is to be calculated on the boundary vertices of grid cell or in the center of the cell, the variable arrangement is denoted to be vertex or cell center oriented. As the methods of employed in the present thesis are intended to be generally applicable to complex geometries the cell centered approach offers more flexibility (3.1). DONT CONFUSE WITH STAGGERED AND COLLOCATED ARRANGEMENT.

Regarding the treatment of domain boundaries and the ordering of the cells within the problem domain different types of numerical grids can be distinguished. The present thesis makes use of so called block structured grids with hexahedron cells. A structured grid is characterized by a constant amount of of grid cells in each coordinate direction. The high regularity of structured grids benefits the computational efficiency of algorithms to be used on this type of grid. A block structured grid consists of different grid blocks of which each considered individually is structured, but if the topology of the grid is considered it is unstructured. An example of a block structured grid with distinguishable grid blocks is given in figure 3.1. The use of block structured grids is motivated by the need to increase the adaptivity of structured grids by maintaining high computational efficiency. Furthermore it naturally embraces the concept of domain decomposition which facilitates the implementation of parallel algorithms for the decomposed computational domain.

Inside a structured grid block, cells with the shape of hexahedrons are used. In addition to the geometric boundaries of each control volume a numerical grid also provides a mapping that assigns to each control volume with index  $P$  a set of indexes of neighbouring control volumes  $NB(P) := \{W, S, B, T, N, E\}$ , which are named after the geographic directions. Figure 3.1 shows a single grid cell with its direct neighbours. The faces  $\{S_w, S_s, S_b, S_t, S_n, S_e\}$  of each hexahedral control volume represent the mentioned geometric boundaries.

- talk about grid quality
- talk about local refinement

- talk about variable arrangement

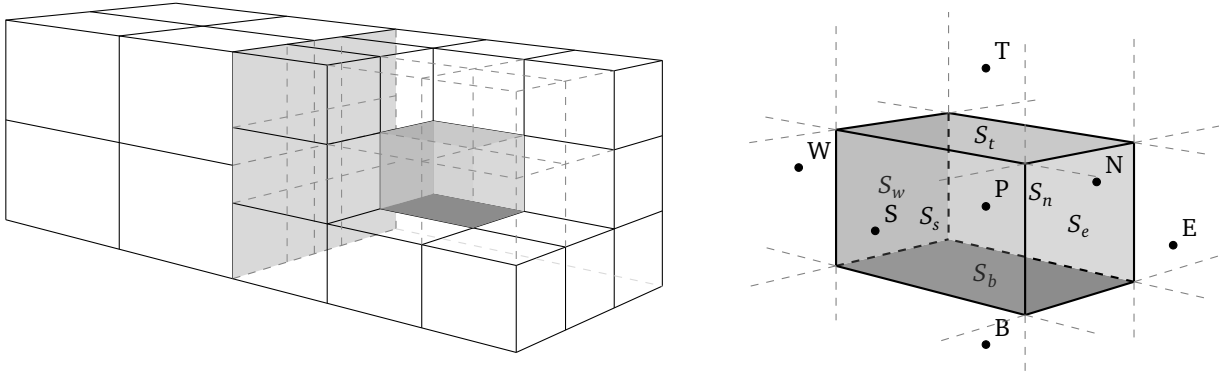

**Figure 2:** Block structured grid consisting of two blocks

### 3.2 Approximation of Integrals and Derivatives

In the course of transforming a partial differential equation into a system of linear algebraic equations, integrals and derivatives have to be approximated. The simplest method for approximating an integral is by using the *midpoint rule*. This rule is similar to the mean value theorem of integration, which states that there exists a point  $\xi \in V$  for a Riemann integrable function  $\phi$  such that  $\phi(\xi) \int_V dV = \int_V \phi(x) dV$ . For the midpoint rule  $\xi$  is taken to be the center of mass of  $V$ .

If the integration domain  $V$  is indeed a Volume, fortunately the calculation of  $\phi(\xi)$  with  $\xi := \left( \int_V x_i dV / \int_V dV \right)_{i=1,\dots,3}$  presents no difficulties since due to the collocated variable arrangement the value of  $\phi$  is stored in the cell center, which corresponds to the location  $\xi$ . However if the domain of integration is a surface, a preceding interpolation step is necessary.

On the other hand to transform a partial differential equation into a linear algebraic equation it is necessary to discretize the differential operators of the equations. For numerical reasons two different discretization techniques are used in this thesis. A common task is to discretize expressions of the form

$$(\nabla \phi)_e \cdot \mathbf{n}_e,$$

where  $(\nabla \phi)_e$  is the Gradient of  $\phi$  on a boundary face  $S_e$ . One method is to directly interpret this expression as a directional derivative and approximate it with a central difference

$$(\nabla \phi)_e \cdot \mathbf{n}_e \approx \frac{\phi_P - \phi_E}{\|\mathbf{x}_P - \mathbf{x}_E\|_2}. \quad (11)$$

Another method would be to first calculate the cell center gradients  $(\nabla \phi)_P$  and  $(\nabla \phi)_E$  and interpolate them linearly before calculating the projection onto  $\mathbf{n}_e$

$$(\nabla \phi)_e \cdot \mathbf{n}_e \approx [\gamma_e (\nabla \phi)_P + (1 - \gamma_e) (\nabla \phi)_E] \cdot \mathbf{n}_e, \quad (12)$$

where  $\gamma_e := \|\mathbf{x}_P - \mathbf{x}_e\|_2 / \|\mathbf{x}_P - \mathbf{x}_E\|_2$  is a geometric interpolation factor. For calculating the cell center gradients a method based on Gauss' integration theorem and the midpoint rule for volume integration is employed

$$(\nabla \phi)_{i,P} = \left( \frac{\partial \phi}{\partial x_i} \right)_P \approx \frac{\int_V \left( \frac{\partial \phi}{\partial x_i} \right)_P dV}{|V|}. \quad (13)$$

Briefly explain the idea behind the quadrature via the midpoint rule. Talk about central differences and the approximation via the gauss theorem. Maybe talk about the resulting order of the truncation error.

---

### 3.3 Treatment of Non-Orthogonality of Grid Cells

---

Unfortunately real applications involve complex geometries, which in turn affects the orthogonality of the grid. On non-orthogonal meshes the directional derivative in direction of the face normal unit vector  $\mathbf{n}_e$  can no longer be approximated as in (11). On the other side the exclusive usage of (13) is not desirable due to the bigger truncation error that comes with this approximation (PROOF?). Hence a compromise is made and the surface vector  $\mathbf{S}_e := S_e \mathbf{n}_e$  is decomposed as

$$\mathbf{S}_e = \Delta + \mathbf{k}, \quad (14)$$

where  $\Delta$  is parallel to the vector  $\mathbf{d}_e := (\mathbf{x}_E - \mathbf{x}_P)$  that directly connects the center of the control volume  $P$  with the center of its neighbour  $E$ . This vector controls the *orthogonal* contribution to the directional derivative. The vector  $\mathbf{k}$  controls the influence of the *non-orthogonal* contribution. In the next paragraphs the three main decompositions of the surface vector  $\mathbf{S}_e$  will be presented by stating the respective expression for  $\Delta$ . The resulting vector  $\mathbf{k}$  can be calculated by using (14). One important characteristic that all of the presented approaches have in common is that the non-orthogonal contribution vanishes as expected, when an orthogonal grid is used. For simplicity the presentation of the decompositions is chosen to be two dimensional. An geometrical interpretation of the three approaches is given in 3.3.3. The last subsection handles the integration of one generic approach into the discretization process.

---

#### 3.3.1 Minimum Correction Approach

---

This is the approach as proposed in Muzaferja. The reader should note, that even though Ferziger/Peric reference the work of Muzaferja they use a different approach to be presented in the next paragraph. This method is designed to keep the non-orthogonal contribution minimal by always choosing  $\mathbf{k}$  to be orthogonal to  $\Delta$ , which leads to

$$\Delta = (\mathbf{d} \cdot \mathbf{S}_e) \frac{\mathbf{d}}{\|\mathbf{d}\|_2}.$$

It should be noted that the Influence of the orthogonal contribution decreases with increasing non-orthogonality of the grid.

---

#### 3.3.2 Orthogonal Correction Approach

---

The following method for decomposing the surface normal vector is presented in Ferziger/Peric and the approach implemented in the developed solvers. In this approach a simple projection is used which is independent of the non-orthogonality of the grid. As a result the orthogonal contribution  $\|\Delta\|_2 = \|\mathbf{S}_e\|_2$  and is thus modelled as

$$\Delta = S_e \frac{\mathbf{d}}{\|\mathbf{d}\|_2}.$$

---

#### 3.3.3 Over-Relaxed Approach

---

The last approach is used in Jsak and Darwish and is characterized by an increasing influence of the orthogonal contribution with increasing grid non-orthogonality, as opposed to the minimum correction approach. The orthogonal contribution is calculated as

$$\Delta = S_e^2 \frac{\mathbf{d}}{\mathbf{d} \cdot \mathbf{S}_e}.$$

---

#### 3.3.4 Deferred Non-Orthogonal Correction

---

In order to reduce the computational stencil that would be necessary to handle the non-orthogonal correction implicitly the correction will be treated explicitly using a deferred correction which guarantees that in the case of a fully converged solution only the face normal derivative has been taken into account. Generally the discretization using a non-orthogonal correction would yield

$$(\nabla \phi)_e \cdot \mathbf{S}_e \approx (\nabla \phi)_e \cdot \Delta + (\nabla \phi)_e \cdot \mathbf{k}.$$

Where the first term can be approximated using a central differencing scheme for the directional derivative and the second by interpolating cell center gradients. If one furthermore uses the fact that this method comes to play in a solution algorithm for a non-linear system of partial differential equations a deferred correction can be implemented which ensues a smaller error from the non-orthogonality. In the case of the previously mentioned discretization techniques for partial derivatives a possible deferred correction approach reads

$$(\nabla \phi)_e \cdot \mathbf{S}_e \approx \|\Delta\|_2 \frac{\phi_P - \phi_E}{\|\mathbf{x}_P - \mathbf{x}_E\|_2} - (\nabla \phi)_e^{(n-1)} \cdot (\Delta - \mathbf{S}_e).$$

It should be noted that the use of a deferred correction in conjunction with the requirement that the non-orthogonal correction vanishes on orthogonal grid introduces an inconsistent discretization of  $(\nabla \phi)_e \cdot \Delta$ .

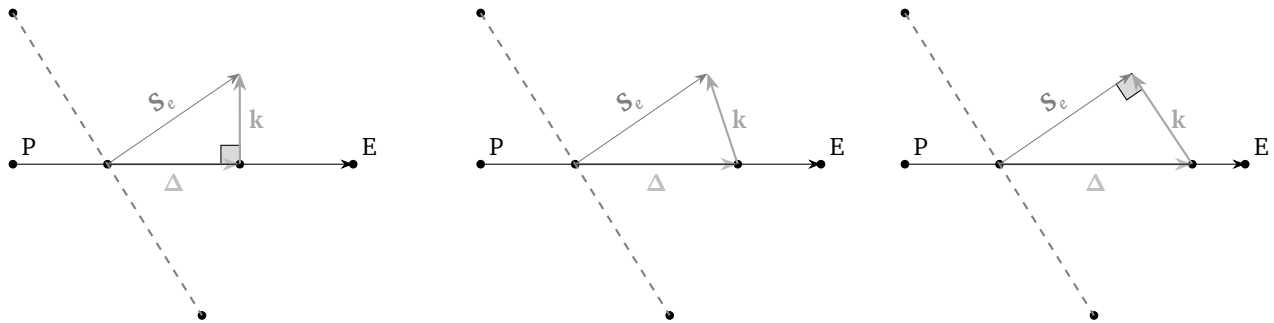


Figure 3: Minimum correction, orthogonal correction and over-relaxed approach

### 3.4 Numerical Solution of Non-Linear Systems – Linearization Techniques

Introduce the concept of the Picard-Iteration as a linearization technique. Introduce the notions of inner and outer iterations. Refer to later chapters when it comes to deferred correction.

### 3.5 Numerical Solution of Linear Systems

#### 3.5.1 Stone's SIP Solver

Basic Idea as in Schäfer or Peric. Emphasize that this is a very problem specific approach, that cannot be generalized that easily in opposition to the general purpose linear solvers from PETSc. Present either BiCGStab or GMRES, the one which performs better and is used throughout the thesis.

#### 3.5.2 Krylov Subspace Methods

- General concept of cyclic vector spaces of  $\mathbb{R}^n$ ,
- talk about bases of krylov subspaces and the arnoldi algorithm, talk about polynomials and linear combinations
- mention the two major branches (minimum residual approach, petrov and ritz-galerkin approach)
- name some representative ksp algorithms, importance of preconditioning, not as detailed as in bachelor thesis
- in cases there is a nonempty Nullspace what happens?

## 4 Implicit Finite Volume Method for Incompressible Flows – Segregated Approach

The purpose of this section is to present the discretization applied to the set of equations (10). Since the system of partial differential equations to be solved always exhibits a coupling at least between the dependent variables pressure and velocity a first solution algorithm, namely the *SIMPLE* algorithm addressed to resolve the pressure velocity coupling is introduced. Methods of calculating mass fluxes and the detailed derivation of all coefficients that result from the discretization process is presented. The discretization of those boundary conditions, that are relevant for the present thesis will be presented in their own subsection.

### 4.1 Discretization of the Mass Balance

Integration of equation (10a) over the integration domain of a single control volume  $P$  yields after the application of Gauss' integration theorem and the additivity of the Riemann integral

$$\iint_{S_f} u_i n_i dS = \sum_{f \in \{w,s,b,t,n,e\}} \iint_{S_f} u_i n_i dS = 0.$$

In the present work the mass balance is discretized using the midpoint rule for the surface integrals and linear interpolation of the velocity to to center of mass of the surface. This leads to the following form of the mass balance:

$$\sum_{f \in \{w,s,b,t,n,e\}} u_{i,f} n_{fi} S_f = 0, \quad (15)$$

where no interpolation to attain the values of  $u_i$  at the face  $S_f$  is performed yet, since the straightforward linear interpolation will lead to undesired oscillations in the solution fields. An interpolation method to circumvent this so called *checker boarding* effect is presented in subsection 4.2.

### 4.2 A Pressure-Weighted Interpolation Method for Velocities

The advantages of using a cell-centered variable arrangement are evident: The treatment of non-orthogonality is simplified and the conservation property of finite volume methods is retained [5, 20, 22, 34]. A major drawback with cell centered variable arrangements is that pressure field may delink which will then lead to unphysical oscillations in both the pressure and the velocity results. If the oscillations are severe enough the solution algorithm might even get unstable and diverge. The described decoupling occurs, when the pressure gradient in the momentum balances and the mass fluxes in the continuity equation are discretized using central differences. A common practice to eliminate this behaviour is the use of a momentum interpolation technique, also known as *Rhie-Chow Interpolation* [26]. The original interpolation scheme however doesn't guarantee a unique solution, independent of the amount of under-relaxation. The performance of one of the algorithms that are used in the present thesis heavily relies on the under-relaxation of variables to accomplish stability. Furthermore the original method as proposed by [26] does not account for large body forces which also may lead to unphysical results. This issues will be addressed in this subsection which at the end will present an interpolation method that assures an under-relaxation independent solution, the *pressure-weighted interpolation method* [22].

Starting point of the pressure-weighted interpolation method are the discretized momentum balances at node  $P$  and the arbitrary neighbouring node  $Q$ . The discretization for finite volume methods and details including the incorporation of under-relaxation factors will be handled in subsection 4.5. The semi-discrete implicit momentum balances, if one solves for the velocity at node  $P$  or  $Q$ , reads

$$u_{i,P}^{(n)} = -\frac{\alpha_{u_P}}{a_{P,u_i}} \left( \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n)} + b_{P,u_i}^{(n-1)} - V_P \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} \right) + (1 - \alpha_{u_P}) u_{i,P}^{(n-1)} \quad (16a)$$

$$\text{and } u_{i,Q}^{(n)} = -\frac{\alpha_{u_Q}}{a_{Q,u_i}} \left( \sum_{F \in NB(Q)} a_{F,u_i} u_{i,F}^{(n)} + b_{Q,u_i}^{(n-1)} - V_Q \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) + (1 - \alpha_{u_Q}) u_{i,Q}^{(n-1)}, \quad (16b)$$

where the superscript  $(n-1)$  denotes the previous outer iteration number. The reader should note, that the pressure gradient has not been discretized yet. This has the advantage that the selective interpolation technique [28] can be applied, which is crucial for the elimination of the mentioned oscillations. In almost the same manner a semi-discrete implicit momentum balance can be formulated for a virtual control volume located between nodes  $P$  and  $Q$  (PICTURE)

$$u_{i,f}^{(n)} = -\frac{\alpha_{u_f}}{a_{f,u_i}} \left( \sum_{F \in NB(f)} a_{F,u_i} u_{i,F}^{(n)} + b_{f,u_i}^{(n-1)} - V_f \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} \right) + (1 - \alpha_{u_f}) u_{i,f}^{(n-1)}. \quad (17)$$



To guarantee convergence of this expression of  $u_{i,f}$ , under-relaxation is necessary [20]. To eliminate the undefined artifacts surging from the virtualization of a control volume the following assumptions have to be made to derive a closed expression for the velocity on the boundary face  $S_f$

$$\frac{\alpha_{u_f}}{a_{f,u_i}} \left( \sum_{F \in NB(f)} a_{F,u_i} u_{i,F}^{(n)} \right) \approx (1 - \gamma_f) \frac{\alpha_{u_P}}{a_{P,u_i}} \left( \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n)} \right) + \gamma_f \frac{\alpha_{u_Q}}{a_{Q,u_i}} \left( \sum_{F \in NB(Q)} a_{F,u_i} u_{i,F}^{(n)} \right) \quad (18a)$$

$$\text{and } \frac{\alpha_{u_f}}{a_{f,u_i}} \approx (1 - \gamma_f) \frac{\alpha_{u_P}}{a_{P,u_i}} + \gamma_f \frac{\alpha_{u_Q}}{a_{Q,u_i}}, \quad (18b)$$

where  $\gamma_f$  is a geometric interpolation factor.

Using the assumptions made in equation (18) the expression in equation (17) can be closed in a way that it only depends on the variable values in node  $P$  and  $Q$

$$\begin{aligned} u_{i,f}^{(n)} &\approx (1 - \gamma_f) \left( -\frac{\alpha_u}{a_{P,u_i}} \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n)} \right) + \gamma_f \left( -\frac{\alpha_u}{a_{Q,u_i}} \sum_{F \in NB(Q)} a_{F,u_i} u_{i,F}^{(n)} \right) \\ &\quad + \frac{\alpha_u}{a_{f,u_i}} b_{f,u_i}^{(n-1)} - \frac{\alpha_{u_f}}{a_{f,u_i}} V_f \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} + (1 - \alpha_u) u_{i,f}^{(n-1)} \\ &= (1 - \gamma_f) u_{i,P}^{(n)} - (1 - \gamma_f) \left( b_{Q,u_i}^{(n-1)} - V_Q \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) + \gamma_f u_{i,Q}^{(n)} - \gamma_f \left( b_{Q,u_i}^{(n-1)} - V_Q \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) \\ &\quad + \frac{\alpha_{u_f}}{a_{f,u_i}} b_{f,u_i}^{(n-1)} - \frac{\alpha_{u_f}}{a_{f,u_i}} V_f \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} + (1 - \alpha_u) u_{i,f}^{(n-1)} \\ &= \left[ (1 - \gamma_f) u_{i,P}^{(n)} + \gamma_f u_{i,Q}^{(n)} \right] \\ &\quad - \left[ \left( (1 - \gamma_f) \frac{\alpha_u V_P}{a_{P,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - (1 - \gamma_f) \frac{\alpha_u V_P}{a_{P,u_i}} \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} - \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right] \\ &\quad + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,P}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right] \\ &\approx \left[ (1 - \gamma_f) u_{i,P}^{(n)} + \gamma_f u_{i,Q}^{(n)} \right] \\ &\quad - \left( (1 - \gamma_f) \frac{\alpha_u V_P}{a_{P,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - (1 - \gamma_f) \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} - \gamma_f \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right] \\ &\quad + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,P}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right]. \end{aligned} \quad (19)$$

It should be noted that the argumentation that led to the last expression is that the task of the underlined pressure gradient corrector in equation (19) is to suppress oscillations in the pressure field. If there are no oscillations this part should not become active. As long as the behaviour of this corrector remains consistent it can be multiplied with arbitrary constants [11]. This is however true on equidistant grids, where  $\gamma_f = 1/2$  and central differences are used to calculate the gradients. On arbitrary orthogonal grids another modification has to be performed which is based on a special case of the mean value theorem of differential calculus and the following

**Proposition.** Let  $x_1, x_2 \in \mathbb{R}$  with  $x_1 \neq x_2$  and  $p(x) = a_0 + a_1 x + a_2 x^2$  a real polynomial function. Then

$$\frac{dp}{dx} \left( \frac{x_1 + x_2}{2} \right) = \frac{p(x_2) - p(x_1)}{x_2 - x_1},$$

i.e. the slope of the secant equals the value of the first derivative of  $p$  exactly half the way between  $x_1$  and  $x_2$ .

*Proof.* Evaluation of the derivative yields

$$\frac{dp}{dx} \left( \frac{x_1 + x_2}{2} \right) = a_1 + 2a_2 \frac{x_1 + x_2}{2} = a_1 + a_2(x_1 + x_2).$$

On the other hand the slope of the secant, using the third binomial rule can be expressed as

$$\begin{aligned} \frac{p(x_2) - p(x_1)}{x_2 - x_1} &= \frac{a_0 + a_1x_2 + a_2x_2^2 - (a_0 + a_1x_1 + a_2x_1^2)}{x_2 - x_1} \\ &= \frac{a_1(x_2 - x_1) + a_2(x_2^2 - x_1^2)}{x_2 - x_1} \\ &= a_1 + a_2(x_2 + x_1). \end{aligned}$$

The comparison of both expressions completes the proof.  $\square$

It is desirable for the pressure corrector to vanish independent of the grid spacing if the profile of the pressure is quadratic and hence does not exhibit oscillations. According to the preceding proposition this can be accomplished by modifying equation (19) to average the pressure gradients from node  $P$  and  $Q$  instead of interpolating linearly

$$\begin{aligned} u_{i,f}^{(n)} &= \left[ (1 - \gamma_f) u_{i,P}^{(n)} + \gamma_f u_{i,Q}^{(n)} \right] \\ &\quad - \left( (1 - \gamma_f) \frac{\alpha_u V_P}{a_{P,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - \frac{1}{2} \left( \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} + \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) \right] \\ &\quad + \underline{(1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,P}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right]}. \end{aligned} \quad (20)$$

Comparing this final expression with the standard interpolation scheme it is evident that the underlined term is not taken into consideration normally [11]. However section 7.5 shows that neglecting this term creates under-relaxation factor dependent results indeed. This section concludes with a final

**Proposition.** *The pressure weighted momentum interpolation scheme (20) guarantees the converged solution for  $u_{i,f}$  to be independent of the velocity under-relaxation  $\alpha_u$ .*

*Proof.* An equivalent formulation of (20) is given by

$$\begin{aligned} \alpha_u u_{i,f}^{(n-1)} + u_{i,f}^{(n-1)} - u_{i,f}^{(n)} &= \alpha_u \left[ (1 - \gamma_f) u_{i,P}^{(n-1)} + \gamma_f u_{i,Q}^{(n-1)} \right] \\ &\quad + \left[ (1 - \gamma_f) (u_{i,P}^{(n)} - u_{i,P}^{(n-1)}) + \gamma_f (u_{i,Q}^{(n)} - u_{i,Q}^{(n-1)}) \right] \\ &\quad - \alpha_u \left( (1 - \gamma_f) \frac{V_P}{a_{P,u_i}} + \gamma_f \frac{V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - \frac{1}{2} \left( \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} + \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) \right] \end{aligned}$$

Upon convergence  $u_{i,P}^{(n)} = u_{i,P}^{(n-1)}$  and  $u_{i,Q}^{(n)} = u_{i,Q}^{(n-1)}$ . This leads to

$$\begin{aligned} \alpha_u u_{i,f}^{(n-1)} &= \alpha_u \left[ (1 - \gamma_f) u_{i,P}^{(n-1)} + \gamma_f u_{i,Q}^{(n-1)} \right] \\ &\quad - \alpha_u \left( (1 - \gamma_f) \frac{V_P}{a_{P,u_i}} + \gamma_f \frac{V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - \frac{1}{2} \left( \left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} + \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right) \right], \end{aligned}$$

which shows, after division by  $\alpha_u > 0$ , that  $u_{i,f}$  is independent of the under-relaxation factor.  $\square$

### 4.3 Implicit Pressure Correction and the SIMPLE Algorithm

The goal of finite volume methods is to deduce a system of linear algebraic equations from a partial differential equation. In the case of the momentum balances the general structure of this linear equations is

$$u_{i,p}^{(n)} = -\frac{\alpha_{up}}{a_{p,u_i}} \left( \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n)} + b_{p,u_i}^{(n-1)} - V_p \left( \frac{\partial p}{\partial x_i} \right)_p^{(n-1)} \right) + (1 - \alpha_u) u_{i,p}^{(n-1)} \quad (21)$$

where the pressure gradient has been discretized only symbolically and  $b_{p,u_i}$  denotes the source term. At this stage the equations are still coupled and non-linear. As described in section 3.4 the Picard iteration process can be used to linearize the equations. Every momentum balance equation then only depends on the one dominant variable  $u_i$ . Furthermore the coupling of the momentum balances through the convective term ( $u_i u_j$ ) is resolved in the process of linearization. The decoupled momentum balances can then be solved sequentially for the dominant variable  $u_i$ . All coefficients  $a_{\{p,F\},u_i}$ , the source term and the pressure gradient will be evaluated explicitly by using results of the preceding outer iteration ( $n-1$ ). For the pressure gradient this is to be interpreted as taking the pressure of the antecedent iteration outer iteration as a first guess for the following iteration that has to be corrected until all the non-linear equations are fulfilled up to a certain tolerance. Section (6.4.2) presents a suitable convergence criterion and its implementation. This linearization process in conjunction with the pressure guess leads to the following linear equation

$$u_{i,p}^{(n*)} = -\frac{\alpha_{up}}{a_{p,u_i}} \left( \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n*)} + b_{p,u_i}^{(n-1)} - V_p \left( \frac{\partial p}{\partial x_i} \right)_p^{(n-1)} \right) + (1 - \alpha_u) u_{i,p}^{(n-1)} \quad (22)$$

Here (\*) indicates that the solution of this equation still needs to be corrected to also fulfill the discretized mass balance

$$\sum_{F \in NB(P)} (u_i)_f^{(n)} n_i S_f = 0. \quad (23)$$

Applying the same procedure as in section 4.2 to equation (22) results in the following expression for the face velocities after solving the discretized momentum balances using a pressure guess

$$\begin{aligned} u_{i,f}^{(n*)} &= \left[ (1 - \gamma_f) u_{i,p}^{(n*)} + \gamma_f u_{i,Q}^{(n*)} \right] \\ &\quad - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n-1)} - (1 - \gamma_f) \left( \frac{\partial p}{\partial x_i} \right)_p^{(n-1)} - \gamma_f \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n-1)} \right] \\ &\quad + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,p}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right]. \end{aligned} \quad (24)$$

The lack of an equation with the pressure as dominant variable leads to the necessity to alter the mass balance as the only equation left. Methods of this type are called projection methods. A common class of algorithms of this family of methods uses an equation for the additive pressure correction  $p'$  instead of the pressure itself and enforces continuity by correcting the velocities with an additive corrector  $u'_i$  as in

$$u_{i,p}^{(n)} = u_{i,p}^{(n*)} + u'_{i,p}, \quad u_{i,f}^{(n)} = u_{i,f}^{(n*)} + u'_{i,f} \quad \text{and} \quad p_p^{(n)} = p_p^{(n-1)} + p'_p.$$

It is now possible to formulate the discretized momentum balance for the corrected velocities and the corrected pressure as

$$u_{i,p}^{(n)} = -\frac{\alpha_{up}}{a_{p,u_i}} \left( \sum_{F \in NB(P)} a_{F,u_i} u_{i,F}^{(n)} + b_{p,u_i}^{(n-1)} - V_p \left( \frac{\partial p}{\partial x_i} \right)_p^{(n)} \right) + (1 - \alpha_u) u_{i,p}^{(n-1)}. \quad (25)$$

It should be noted that the only difference to the equation which will be solved in the next outer iteration is that the source term  $b_{p,u_i}$  has not been updated yet. The same applies for the equation for the face velocity  $u_{i,f}$

$$\begin{aligned} u_{i,f}^{(n)} &= \left[ (1 - \gamma_f) u_{i,p}^{(n)} + \gamma_f u_{i,Q}^{(n)} \right] \\ &\quad - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)_f^{(n)} - (1 - \gamma_f) \left( \frac{\partial p}{\partial x_i} \right)_p^{(n)} - \gamma_f \left( \frac{\partial p}{\partial x_i} \right)_Q^{(n)} \right] \\ &\quad + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,p}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right]. \end{aligned} \quad (26)$$

To couple velocity and pressure correctors one can subtract equations (22) from (25) and (24) from (26) to get

$$u'_{i,p} = -\frac{\alpha_{u_p}}{a_{p,u_i}} \left( \sum_{F \in NB(P)} \alpha_{F,u_i} u'_{i,F} - V_p \left( \frac{\partial p'}{\partial x_i} \right)_p^{(n)} \right) \quad \text{and} \quad (27)$$

$$u'_{i,f} = \left[ (1 - \gamma_f) u'_{i,p} + \gamma_f u'_{i,Q} \right] - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)'_f - (1 - \gamma_f) \left( \frac{\partial p}{\partial x_i} \right)'_p - \gamma_f \left( \frac{\partial p}{\partial x_i} \right)'_Q \right]. \quad (28)$$

The majority of the class of pressure correction algorithms has this equations as a common basis. Each algorithm then introduces special distinguishable approximations of the velocity corrections that are, at the moment of solving the pressure equation, still unknown. The method used in the present work is the SIMPLE Algorithm (Semi-Implicit Method for Pressure-Linked Equations [23]). The approximation this algorithm performs is severe since the term containing the unknown velocity corrections is dropped entirely. The respective term has been underlined in equation (27). Since the global purpose of the presented method is to enforce continuity by implicitly calculating a pressure correction, the velocity correction has to be expressed solely in terms of the pressure correction. This can be accomplished by inserting equation (27) in to equation (28). This gives an update formula

$$u'_{i,f} = - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left( \frac{\partial p}{\partial x_i} \right)'_f, \quad (29)$$

which is then, together with (24), inserted into the discretized continuity equation (23) to obtain

$$\sum_{F \in NB(P)} \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_F}{a_{F,u_i}} \right) \left( \frac{\partial p}{\partial x_i} \right)'_f n_i S_f = b_{p,p}, \quad (30)$$

where the right hand side  $b_{p,p}$  is defined as

$$b_{p,p} := \sum_{F \in NB(P)} u_{i,f}^{(n*)} n_i S_f. \quad (31)$$

The complete discretization with central differences as approximation for the gradient of the pressure correction is straightforward and will be presented in subsection 4.4.

The approximation performed in the SIMPLE algorithm affects convergence in a way that the pressure correction has to be under-relaxed with a parameter  $\alpha_p \in [0, 1]$

$$p_p^{(n)} = p_p^{(n-1)} + \alpha_p p'_p. \quad (32)$$

As shown in section 4.2 the behaviour of the pressure weighted interpolation method on non-equidistant grids can be improved by replacing the linear interpolation of pressure gradients with a simple average in equation (24). This leads to the following equation for calculating mass fluxes

$$\begin{aligned} u_{i,f}^{(n*)} &= \left[ (1 - \gamma_f) u_{i,p}^{(n*)} + \gamma_f u_{i,Q}^{(n*)} \right] \\ &\quad - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial x_i} \right)^{(n-1)}_f - \frac{1}{2} \left( \left( \frac{\partial p}{\partial x_i} \right)^{(n-1)}_p + \left( \frac{\partial p}{\partial x_i} \right)^{(n-1)}_Q \right) \right] \\ &\quad + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,p}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right]. \end{aligned} \quad (33)$$

Generally the SIMPLE algorithm can be represented by the following iterative procedure as in Algorithm 4.3.

---

#### 4.4 Discretization of the Mass Fluxes and the Pressure Correction Equation

---

Subsections 4.2 and 4.3 introduced the concept of pressure weighted interpolation to avoid oscillating results and an algorithm to calculate a velocity field that obeys continuity. The derived equations have not been discretized completely, furthermore the approach has not been generalized to non-orthogonal grids.

---

**Algorithm 1** SIMPLE Algorithm

---

INITIALIZE variables

**while** (convergence criterion not accomplished) **do**

    SOLVE linearized momentum balances, equation (22)

    CALCULATE mass fluxes using (26) or (33)

    SOLVE pressure correction equation to assure continuity, equation (36)

    UPDATE pressure using (32)

    UPDATE velocities and mass fluxes using (27)

**if** (Coupled scalar equation) **then**

        SOLVE scalar equation as described in (4.7)

**end if**

**end while**

---

The discretized mass balance (15) only depends on the normal velocities  $u_{i,f} n_{i,f}$ . By analogy with equation (33) an interpolated normal face velocity and thus the mass flux can be calculated as

$$\begin{aligned} u_{i,f}^{(n*)} n_{i,f} = & \left[ (1 - \gamma_f) u_{i,p}^{(n*)} + \gamma_f u_{i,Q}^{(n*)} \right] n_{i,f} \\ & - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_Q}{a_{Q,u_i}} \right) \left[ \left( \frac{\partial p}{\partial n} \right)_f^{(n-1)} - \frac{1}{2} \left( \left( \frac{\partial p}{\partial n} \right)_p^{(n-1)} + \left( \frac{\partial p}{\partial n} \right)_Q^{(n-1)} \right) \right] \\ & + (1 - \alpha_u) \left[ u_{i,f}^{(n-1)} - (1 - \gamma_f) u_{i,p}^{(n-1)} - \gamma_f u_{i,Q}^{(n-1)} \right] n_{i,f}, \end{aligned} \quad (34)$$

where the scalar product of pressure gradients and the normal vector has been replaced by a directional derivative in the direction of the face normal vector. In the present work pressure gradients in (34) and pressure correction gradients in equation (36) and will be discretized by central differences

$$\left( \frac{\partial p}{\partial n} \right)_f \approx \frac{p_p - p_Q}{(\mathbf{x}_p - \mathbf{x}_Q) \cdot \mathbf{n}_f} \quad \text{and} \quad \left( \frac{\partial p'}{\partial n} \right)_f \approx \frac{p'_p - p'_Q}{(\mathbf{x}_p - \mathbf{x}_Q) \cdot \mathbf{n}_f}. \quad (35)$$

This discretization can then be inserted into the semi-discretized pressure correction equation (36)

$$\sum_{F \in \text{NB}(P)} \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_F}{a_{F,u_i}} \right) \frac{p'_p - p'_F}{(\mathbf{x}_p - \mathbf{x}_F) \cdot \mathbf{n}_f} S_f = b_{p,p}. \quad (36)$$

The resulting coefficients for the pressure correction equation

$$a_{p,p'} p'_p + \sum_{F \in \text{NB}(P)} a_{F,p'} p'_F = b_{p,p'},$$

can be calculated as

$$a_{F,p'} = - \left( (1 - \gamma_f) \frac{\alpha_u V_p}{a_{p,u_i}} + \gamma_f \frac{\alpha_u V_F}{a_{F,u_i}} \right) \frac{S_f}{(\mathbf{x}_p - \mathbf{x}_F) \cdot \mathbf{n}_f} \quad \text{and} \quad a_{p,p'} = \sum_{F \in \text{NB}(P)} -a_{F,p'}.$$

The right hand side can be calculated as in equation (31), if the presented discretization is applied.

---

#### 4.5 Discretization of the Momentum Balance

---

The stationary momentum balance integrated over a single control volume  $P$  reads as

$$\underbrace{\int_S (\rho u_i u_j) n_j dS}_{\text{convective term}} - \underbrace{\int_S \left( \mu \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \right) n_j dS}_{\text{diffusive term}} = - \underbrace{\int_V \frac{\partial p}{\partial x_i} dV}_{\text{sourceterm pressure}} - \underbrace{\int_V \rho \beta (T - T_0) dV}_{\text{sourceterm temperature}} \quad (37)$$

where the different terms to be addressed individually in the following sections are indicated. Note that the form of this equation has been modified by using Gauss' integration theorem. The terms residing on the left will be treated in an implicit and due to deferred corrections in an explicit manner whereas the terms on the right will be treated exclusively in an explicit manner.

---

#### 4.5.1 Linearization and Discretization of the Convective Term

---

The convective term  $\rho u_i u_j$  of the Navier-Stokes equations is the reason for the non-linearity of the equations. In order to deduce a set of linear algebraic equations from the Navier-Stokes equations this term has to be linearized. As introduced in section (3.4), the non linearity will be dealt with by means of an iterative process, the Picard iteration. The part dependent on the non dominant dependent variable therefore will be approximated by its value from the previous iteration as  $\rho u_i^{(n)} u_j^{(n)} \approx \rho u_i^{(n)} u_j^{(n-1)}$ . However this linearization will not be directly visible because it will be covered by the mass flux  $\dot{m}_f = \iint_{S_f} \rho u_j^{(n-1)} n_j dS$ . Using the additivity of the Riemann integral the first step is to decompose the surface integral into individual contributions from each boundary face of the control volume  $P$

$$\iint_S \rho u_i u_j n_j dS = \sum_{f \in \{w,s,b,t,n,e\}} \iint_{S_f} \rho u_i u_j n_j dS = \sum_{f \in \{w,s,b,t,n,e\}} F_{i,f}^c$$

where  $F_{i,f}^c := \iint_{S_f} \rho u_i^{(n)} u_j^{(n-1)} n_j dS$  is the convective flux of the velocity  $u_i$  through the face  $S_f$ .

To improve diagonal dominance of the resulting linear system while maintaining the smaller discretization error of a higher order discretization, a blended discretization scheme is applied using a deferred correction. Since due to the non-linearity of the equations to be solved an iterative solution process is needed by all means, the overall convergence doesn't degrade noticeably when using a deferred correction. Blending and deferred correction result in a decomposition of the convective flux into a lower order approximation that is treated implicitly and the explicit difference between the higher and lower order approximation for the same convective flux. Since for coarse grid resolutions the use of higher order approximations may lead to oscillations of the solution which may degrade or even impede convergence, the schemes can be blended by a control factor  $\eta \in [0, 1]$ . To show the generality of this approach all further derivations are presented for the generic boundary face  $S_f$  that separates control volume  $P$  from its neighbour  $F \in NB(P)$ . This decomposition then leads to

$$F_{i,f}^c \approx \underbrace{F_{i,f}^{c,l}}_{\text{implicit}} + \eta \underbrace{[F_{i,f}^{c,h} - F_{i,f}^{c,l}]}_{\text{explicit}}^{(n-1)}.$$

Note that the convective fluxes carrying a  $l$  or  $h$  as exponent, already have been linearized and discretized. The discretization applied to the convective flux in the present work is using the midpoint integration rule and blends the upwind interpolation scheme with the linear interpolation scheme. Applied to above decomposition one can derive the following approximations

$$\begin{aligned} F_{i,f}^{c,l} &= u_{i,F} \min(\dot{m}_f, 0) + u_{i,P} \max(0, \dot{m}_f) \\ F_{i,f}^{c,h} &= u_{i,F} \gamma_f + u_{i,P} (1 - \gamma_f), \end{aligned}$$

where the variable values have to be taken from the previous iteration step  $(n-1)$  as necessary and the mass flux  $\dot{m}_f$  has been used as result of the linearization process. The results can now be summarized by presenting the convective contribution to the matrix coefficients  $a_{F,u_i}$  and  $a_{P,u_i}$  and the right hand side  $b_{P,u_i}$  which are calculated as

$$a_{F,u_i}^c = \min(\dot{m}_f, 0), \quad a_{P,u_i}^c = \sum_{F \in NB(P)} \max(0, \dot{m}_f) \quad (38a)$$

$$\begin{aligned} b_{P,u_i}^c &= \sum_{F \in NB(P)} \eta \left( u_{i,F}^{(n-1)} (\min(\dot{m}_f, 0) - \gamma_f) \right) \\ &\quad + \eta \left( u_{i,P}^{(n-1)} (\max(0, \dot{m}_f) - (1 - \gamma_f)) \right) \end{aligned} \quad (38b)$$

---

#### 4.5.2 Discretization of the Diffusive Term

---

The diffusive term contains the first partial derivatives of the velocity as result of the material constitutive equation that characterizes the behaviour of Newtonian fluids. As pointed out in section 3.3 directional derivatives can be discretized using central differences on orthogonal grids or in the more general case of non-orthogonal grids using central differences implicitly and a explicit deferred correction comprising the non-orthogonality of the grid. As seen in equation (7) the

diffusive term of the Navier-Stokes equations can be simplified using the mass balance in the case of an incompressible flow with constant viscosity  $\mu$ . To sustain the generality of the presented approach this simplification will be omitted.

As before, by using the additivity and furthermore linearity of the Riemann integral, the integration of the diffusive term will be divided into integration over individual boundary faces  $S_f$

$$\iint_S \left( \mu \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \right) n_j dS = \sum_{f \in \{w,s,b,t,n,e\}} \left[ \iint_{S_f} \mu \frac{\partial u_i}{\partial x_j} n_j dS + \iint_{S_f} \mu \frac{\partial u_j}{\partial x_i} n_j dS \right] = \sum_{f \in \{w,s,b,t,n,e\}} F_{i,f}^d,$$

where  $F_{i,f}^d$  denotes the diffusive flux through an individual boundary face. Section 3.3 only covered the non-orthogonal corrector for directional derivatives. Since the velocity is a vector field and not a scalar field, the results of section 3.3 may only be applied to the underlined term. The other term will be treated explicitly since it is considerably smaller than the underlined term and does not cause oscillations and thus will not derogate convergence. To begin with all present integrals will be approximated using the midpoint rule of integration. The diffusive flux  $F_{i,f}^d$  for a generic face  $S_f$  then reads

$$F_{i,f}^d \approx \mu \left( \frac{\partial u_i}{\partial x_j} \right)_f n_j S_f + \mu \left( \frac{\partial u_j}{\partial x_i} \right)_f n_j S_f.$$

Using central differences for the implicit discretization of the directional derivative and furthermore using the *orthogonal correction* approach from 3.3.2 the approximation can be derived as

$$\begin{aligned} F_{i,f}^d &\approx \mu \left( \frac{u_{P_i} - u_{F_i}}{\|\mathbf{x}_P - \mathbf{x}_F\|_2} - (\nabla u_i)_f^{(n-1)} \cdot (\Delta_f - \mathbf{S}_f) \right) + \mu \left( \frac{\partial u_j}{\partial x_i} \right)_f^{(n-1)} n_{f_i} \\ &= \mu \left( S_f \frac{u_{P_i} - u_{F_i}}{\|\mathbf{x}_P - \mathbf{x}_F\|_2} - \left( \frac{\partial u_i}{\partial x_j} \right)_f^{(n-1)} (\xi_{f_i} - n_{f_i}) S_f \right) + \mu \left( \frac{\partial u_j}{\partial x_i} \right)_f^{(n-1)} n_{f_i}, \end{aligned}$$

where the unit vector pointing in direction of the straight line connecting control volume  $P$  and control volume  $F$  is denoted as

$$\xi_f = \frac{\mathbf{x}_P - \mathbf{x}_F}{\|\mathbf{x}_P - \mathbf{x}_F\|_2}.$$

The interpolation of the cell center gradients to the boundary faces is performed as in (12). Now the contribution of the diffusive part to the matrix coefficients and the right hand side can be calculated as

$$a_{F,u_i}^d = -\frac{\mu S_f}{\|\mathbf{x}_P - \mathbf{x}_F\|_2}, \quad a_{P,u_i}^d = \sum_{F \in NB(P)} \frac{\mu S_f}{\|\mathbf{x}_P - \mathbf{x}_F\|} \quad (39a)$$

$$\begin{aligned} b_{F,u_i}^d &= \sum_{F \in NB(P)} \left( \frac{\partial u_i}{\partial x_j} \right)_f^{(n-1)} (\xi_{f_i} - n_{f_i}) S_f - \mu \left( \frac{\partial u_j}{\partial x_i} \right)_f^{(n-1)} n_{f_i} S_f \\ &= \left( \frac{\partial u_i}{\partial x_j} \right)_f^{(n-1)} \xi_{f_i} S_f - \mu \left( \left( \frac{\partial u_i}{\partial x_j} \right)_f^{(n-1)} - \left( \frac{\partial u_j}{\partial x_i} \right)_f^{(n-1)} \right) n_{f_i} S_f. \end{aligned} \quad (39b)$$

#### 4.5.3 Discretization of the Source Terms

Since in the segregated solution approach in every equation all other variables but the dominant one are treated as constants and furthermore the source terms in equation (37) do not depend on the dominant variable the discretization is straightforward. The source terms of the momentum balance are discretized using the midpoint rule of integration, which leads to the source term

$$-\iiint_V \frac{\partial p}{\partial x_i} dV - \iiint_V \rho \beta (T - T_0) dV \approx -\left( \frac{\partial p}{\partial x_i} \right)_P^{(n-1)} V_P - \rho \beta (T_P^{(n-1)} - T_0) V_P = b_{P,u_i}^{sc} \quad (40)$$

---

#### 4.6 Discretization of the Pressure Correction Equation

---

#### 4.7 Discretization of the Temperature Equation

---

The discretization of the temperature equation is performed by the same means as for the momentum balance. The only difference is a simpler diffusion term. The integral form of the temperature equation after applying the Gauss' theorem of integration is

$$\underbrace{\iint_S \rho u_j T n_j dS}_{\text{advective term}} - \underbrace{\iint_S \kappa \frac{\partial T}{\partial x_j} n_j dV}_{\text{diffusive term}} = \underbrace{\iiint_V q_T dV}_{\text{source term}}.$$

Proceeding as in the previous subsections one can now discretize the advective, the diffusive term and the source term. Since this process does not provide further insight, just the final results will be presented. The discretization yields the matrix coefficients as

$$a_{F,T} = \min(\dot{m}_f, 0) + \frac{\kappa S_f}{\|\mathbf{x}_p - \mathbf{x}_F\|_2} \quad (41a)$$

$$a_{P,T} = \sum_{F \in NB(P)} \max(0, \dot{m}_f) - \frac{\kappa S_f}{\|\mathbf{x}_p - \mathbf{x}_F\|_2} \quad (41b)$$

$$\begin{aligned} b_{P,T} = & \sum_{F \in NB(P)} \eta \left( T_F^{(n-1)} (\min(\dot{m}_f, 0) - \gamma_f) \right) \\ & + \eta \left( T_P^{(n-1)} (\max(0, \dot{m}_f) - (1 - \gamma_f)) \right) \\ & + \sum_{F \in NB(P)} \left( \frac{\partial T}{\partial x_j} \right)_f^{(n-1)} (\xi_{f_j} - n_{f_j}) S_f \\ & + q_{T_P} V_P. \end{aligned} \quad (41c)$$

Again it is possible though not always necessary, as in the case of the velocities, to under-relax the solution of the resulting linear system with a factor  $\alpha_T$ . This can be accomplished as shown in the previous sections.

---

#### 4.8 Boundary Conditions

---

#### 4.9 Treatment of the Singularity of the Pressure Correction Equation with Neumann Boundaries

---

It has to be noted that the derived pressure correction equation is a Poisson equation. As can be proven ?? the linear  $N \times N$  systems surging from the presented discretization on a grid with  $N$  control volumes have a nullspace of dimension one, i.e.

$$\text{null}(A_{p'}) = \text{span}(\mathbb{1}),$$

where  $\mathbb{1} = (1)_{i=1,\dots,N} \in \mathbb{R}^N$  is the vector spanning the nullspace. This singularity accounts for the property of incompressible flows, that pressure can only be determined up to a constant. To fix this constraint various possibilities exist [11]. A common method is to set the pressure correction to zero in one reference control volume and hence at one reference point in the problem domain. This can be done before solving the system by applying this Dirichlet-type condition, or it can be done afterwards when pressure is calculated from the pressure correction. This approach is not suitable for grid convergence studies since without proper interpolation it is not guaranteed that the reference pressure correction is taken at the correct location.

Since some comparisons performed in the present work rely on grid convergence studies another approach for reducing the lose constraint of the pressure correction system has been used: The reference pressure correction is taken to be the mean value of the pressure correction over the domain

$$p'_{\text{ref}} = \frac{\iiint_V p' dV}{\iiint_V dV} \approx \frac{\sum_{p=1}^N p'_p V_p}{\sum_{p=1}^N V_p}$$

such that the net pressure correction amounts to zero. This modifies equation (32) to

$$p_p^{(n)} = p_p^{(n-1)} + \alpha_p (p'_p - p'_{\text{ref}}) \quad (42)$$


---



#### 4.10 Structure of the Assembled Linear Systems

The objective of a finite volume method is to create a set of linear algebraic equations by discretizing partial differential equations. For the momentum balance all necessary components have been calculated. Taking all contributions together leads to the following linear algebraic equation for each control volume  $P$

$$a_{p,u_i} u_{p_i} + \sum_{F \in NB(P)} a_F u_{F_i} = b_{p,u_i},$$

where the coefficients are composed as

$$a_{p,u_i} = a_{p,u_i}^c - a_{p,u_i}^d \quad (43)$$

$$a_{F,u_i} = a_{F,u_i}^c - a_{F,u_i}^d \quad (44)$$

$$b_{p,u_i} = b_{p,u_i}^c - b_{p,u_i}^d + b_{p,u_i}^{sc}. \quad (45)$$

In the case of control volumes located at boundaries some of the coefficients will be calculated in a different manner. This aspect will be addressed in a later section. For the decoupled iterative solution process of the Navier-Stokes equations it is necessary to reduce the change of each dependent variable in each iteration. Normally this is done by a *under-relaxation* technique, a convex combination of the solution of the linear system present iteration ( $n$ ) and from the previous iteration ( $n-1$ ) with the under-relaxation parameter  $\alpha_{u_i}$ . Generally speaking this parameter can be chosen individually for each equation. Since there are no rules for choosing this parameters in a general setting the under-relaxation parameter for the velocities is chosen to be equal for all three velocities,  $\alpha_{u_i} = \alpha_u$ . This has the further advantage that, in case the boundary conditions are implemented with the same intention, the linear system for each of the velocities remains unchanged except for the right hand side. This helps to increase memory efficiency.

Let the solution for the linear system without under-relaxation be denoted as

$$\tilde{u}_{p_i}^{(n)} := \frac{b_{p,u_i} - \sum_{F \in NB(P)} a_F u_{F_i}}{a_{p,u_i}},$$

Which is only a formal expression. A convex combination as described yields

$$\begin{aligned} u_{p_i}^{(n)} &:= \alpha_u \tilde{u}_{p_i}^{(n)} + (1 - \alpha_u) u_{p_i}^{(n-1)} \\ &= \alpha_u \frac{b_{p,u_i} - \sum_{F \in NB(P)} a_F u_{F_i}}{a_{p,u_i}} + (1 - \alpha_u) u_{p_i}^{(n-1)}, \end{aligned}$$

an expression that can be modified to derive a linear system whose solution is the under-relaxed velocity

$$\frac{a_{p,u_i}}{\alpha_u} u_{i,p} + \sum_{F \in NB(P)} a_{F,u_i} u_{i,F} = b_{p,u_i} + \frac{(1 - \alpha_u) a_{p,u_i}}{\alpha_u} u_{i,p}^{(n-1)}.$$

It must be noted that under-relaxation has not been accounted for in the derivation of the Rhie-Chow interpolation method (REFERENCE). As it has been shown the results depend on the choice of the under-relaxation factor. However under-relaxation is necessary for overall convergence, so in order to be able to compare the results of the different solver algorithms this dependency has to be eliminated. Subsection (REFERENCE) will present a common approach to resolve this dependency.

---

## 5 Finite Volume Method for Incompressible Flows – Coupled Approach

---

Since the antecedent section already discussed the discretization of the momentum balance the focus of this section will be on highlighting the differences and presenting various approaches to incorporate different degrees of velocity-temperature and temperature-velocity/pressure coupling. It should be noted that the discretization of the equations to be solved is not changed in any way, so the presented differences only are due to difference in the solution algorithm. As in the previous section the final forms of the presented equations are presented as they are implemented in the developed solver framework.

---

### 5.1 The Coupled Algorithm

---

---

#### 5.1.1 Pressure Equation

---

---

#### 5.1.2 Characteristic Properties of Coupled Solution Methods

---

No Underrelaxation needed, higher memory requirements

Bad condition, singularity, usually faster convergence if efficient linear solver is chosen, coupling in Buoyancy flows (s.a. Peric page 448, Galpin Raithby) Design of algorithm does not need to enforce continuity (is inherently fulfilled because of the coupling of the equations)

Explicitly mention the differences

- Implicit treatment of Pressure Gradient
- Implicit Treatment of Temperature possible
- Boussinesq approximation brings velocity-to-temperature-coupling (vakilipour), Newton-Raphson Linearization
- Temperature dependent densities also possible

---

### 5.2 Coupling the Temperature Equation

---

---

#### 5.2.1 Decoupled Approach

---

---

#### 5.2.2 Velocity-Temperature Coupling

---

---

#### 5.2.3 Temperature-Velocity/Pressure Coupling – Newton-Raphson Linearization

---

---

### 5.3 Boundary Conditions on Domain and Block Boundaries

---

---

#### 5.3.1 Dirichlet Boundary Condition for Velocity

---

---

#### 5.3.2 Wall Boundary Condition

---

---

#### 5.3.3 Block Boundary Condition

---

---

### 5.4 Assembly of Linear Systems – Final Form of Equations

---

---

## 6 CAFFA Framework

---

CAFFA is an acronym and stands for Computer Aided Fluid Flow Analysis. Based on Peric `caffa 2d` code, 3 dimensional extension to blockstructured grids. Characteristic is the parallelisation with PETSc and the fully implicit treatment of arbitrary block boundaries.

---

### 6.1 PETSc Framework

---

PETSc is an acronym for Portable Extensible Toolkit for Scientific Calculations and is a software library. Keep in mind not to copy the manual

---

#### 6.1.1 About PETSc

---

Bell Prize, MPI Programming

---

#### 6.1.2 Basic Data Types

---

Vec, Mat (Different Matrix Types and Their effect on complex methods)

---

#### 6.1.3 KSP and PC Objects and Their Usage

---

Singularities

---

#### 6.1.4 Profiling

---

PETSc Log

---

#### 6.1.5 Common Errors

---

Optimization, Interfaces, (ROWMAJOR, COLUMNMAJOR), Compiler Errors not helpful, Preallocation vs. Mallocs

---

### 6.2 Grid Generation and Conversion

---

Generation of block structured locally refined grids with non-matching block interfaces, neighbouring relations are represented by a special type of boundary conditions; Random number generator to move grid points within a epsilon neighbourhood while maintaining the grid intact. Show in a graph how preallocation impacts on runtime.

---

### 6.3 Preprocessing

---

Matching algorithm – the idea behind clipper and the used projection technique; alt.: Opencascade. Efficient calculation of values for discretization. Important for dynamic mesh refinement, arbitrary polygon matching, parallelizable due to easier interface

---

### 6.4 Implementation Details of CAFFA

---

---

#### 6.4.1 MPI Programming Model

---

Basic idea of distributed memory programming model, emphasize the differences to shared memory model. Have a diagram at hand that shows how CAFFA sequentially works (schedule) and point out the locations where and of which type (global reduce, etc.) communication is, or when synchronization is necessary.

- after each solve
- pressure reference
- error calculation
- gradient calculation

Point out that one should try to minimize the number of this points such that parallel performance stays high. Better to calculate Velocity and Pressure Gradients at once not by separately calling this routine.

---

## 6.4.2 Convergence Control

---

Explain how the criterion for convergence is met

---

## 6.4.3 Modi of Calculation

---

there are different modi of calculation, (NS segregated, then scalar; NS and Scalar Segregated; NS coupled and Scalar segregated; Fully coupled (watch out with fully coupled, this term seems to have already another meaning)). Note that for comparison of solvers it is crucial to develop programs on the same basis. This establishes comparability.

---

## 6.4.4 Indexing of Variables and Treatment of Boundary Values

---

Describe MatZeroValues and how it is used to simplify the code. Also loose a word on PCREDISTRIBUTE its advantages (no boundary values involved, do not have to be reset when system is solved with high tolerance) and downsides (preliminary tests showed bad scaling behaviour (PROVE)). Compliance of PETSc zero based indexing and CAFFA indexing which considers boundary values.

---

## 6.4.5 Field Interlacing

---

Realization through special arrangement of variables and the use of index sets (subvector objects) and/or preprocessor directives. Advantages (there was a paper I cited in my thesis). Note that not all variables are interlaced (Velocities are, but their gradients are not). Great impact on Matrix structure.

---

## 6.4.6 Domain Decomposition, Exchange of Ghost Values and Parallel Matrix Assembly

---

- Ghost values are stored in local representations of the global vector (state the mapping for those entries).
- Matrix coefficients are calculated on one processor and sent to the neighbour.
- Preallocation as crucial aspect for program performance. For the coupled system the matrix is assembled in a 2-3 step process to save memory for coefficients.
- Present a simple method for balancing the matrix related load by letting PETSc take care of matrix distribution.
- Use Spy function of Matlab to visualize the sparse matrices. Point out advantages of calculating coefficients for the neighbouring cells locally (no need to update mass fluxes, geometric data doesn't need to be shared, small communication overhead since processors assemble matrix parts that don't belong to them (visualize)).
- Paradigm: Each time new information is available perform global updates. Advantages of using matrices: Show structure of matrix when using arbitrary matching vs. higher memory requirements vs. better convergence

---

## 6.5 Postprocessing

---

Visualization of Results with Paraview and Tecplot Export matrices as binaries and visualize them using matlab scripts.

---

## 7 Verification of the developed CAFFA Framework

---

Different parts, describe incremental approach, only present final results. Refer to next section for Validation of CAFFA

---

### 7.1 Theoretical Discretization Error

---

present the Taylor-Series Expansion

---

### 7.2 Method of Manufactured Solutions

---

basically sum up the important points of salari's technical report, symmetry of solution/domain/grid is bad point out that mms is not able to detect errors in the physical model Also loose a word or two about discontinuous manufactured solutions

---

### 7.3 Exact and Manufactured Solutions for the Navier-Stokes Equations and the Energy Equation

---

Not always there is an exact solution. Divergence free approach. Presentation of the used manufactured solution. What if solution is not divergence free? Derivation of equations and modifications to continuity equation. analyze the problem of too complicated manufactured solutions. also use temperature dependent density function. Explain why global mass conservation in a discrete sense is important and how it can be achieved. Special domain, vanishing manufactured solution or symmetric manufactured solutions if a higher approximation of boundary fluxes is not feasible.

- <http://scicomp.stackexchange.com/questions/6943/manufactured-solutions-for-incompressible-navier-stokes>
- <http://link.springer.com/article/10.1007/BF00948290>
- <http://physics.stackexchange.com/questions/60476/exact-solutions-to-the-navier-stokes-equations>
- <http://www.annualreviews.org/doi/pdf/10.1146/annurev.fl.23.010191.001111>

---

### 7.4 Measurement of Error and Calculation of Order

---

Different error measures (L2-Norm, completeness of function space, consistency etc.)

---

#### 7.4.1 Testcase on Single Processor on Orthogonal Locally Refined Grid

---

---

#### 7.4.2 Testcase on Multiple Processors on Non-Orthogonal Locally Refined Grid

---

Give a measure of the grid quality.

---

### 7.5 Independence of Under-Relaxation Factor

---

---

## 8 Comparison of Solver Concepts

---

### 8.1 Convergence Behaviour on Locally Refined Block Structured Grids with Different Degrees of Coupling

---

Show how the implicit treatment of block boundaries maintains (high) convergence rates. Plot Residual over number of iterations.

### 8.2 Parallel Performance

---

#### 8.2.1 Employed Hardware and Software – The Lichtenberg-High Performance Computer

---

- Networking
- Mem Section and processes in between islands (calculating across islands)
- Versioning information (PETSc, INTEL COMPILERS, CLIPPER, MPI IMPLEMENTATION, BLAS/LAPACK)
- Software not designed to perform well on desktop PCs.

#### 8.2.2 Measures of Performance

---

- Maße definieren
- Nochmal Hager, Wellein studieren
- Guidelines for measuring performance (bias through system processes or user interaction), only measure calculation time do not consider I/O in the beginning and the end
- Cite Schäfer and Peric with their different indicators for parallel efficiency, load balancing and numerical efficiency

#### 8.2.3 Preliminary Upper Bounds on Performance – The STREAM Benchmark

---

Pinning of processes (picture), preliminary constraints by hardware and operating systems, identification of bottlenecks and explain possible workarounds, history and results of STREAM. Bandwidth as Bottleneck, how to calculate a Speedup estimate based on the measured bandwidth. PETSc Implementation of STREAM

#### 8.2.4 Discussion of Results for Parallel Efficiency

---

#### 8.2.5 Speedup Measurement for Analytic Test Cases

---

### 8.3 Test Cases with Varying Degree of Non-Linearity

---

As Peric says I want to prove that the higher the non-linearity of NS, the better relative convergence rates can be achieved with a coupled solver. Fi

#### 8.3.1 Transport of a Passive Scalar – Forced Convection

---

#### 8.3.2 Buoyancy Driven Flow – Natural Convection

---

#### 8.3.3 Flow with Temperature Dependent Density – A Highly Non-Linear Test Case

---

Maybe I could consider two test cases, one with oscillating density and one with a quadratic polynomial. Interesting would be also to consider the dependence of convergence on another scalar transport equation

### 8.4 Realistic Testing Scenarios – Benchmarking

---

Also consider simple load balancing by distributing matrix rows equally

---

#### 8.4.1 Flow Around a Cylinder 3D – Stationary

---

Describe Testing Setup (Boundary conditions and grid). Present results and compare them with literature.

---

#### 8.4.2 Flow Around a Cylinder 3D – Instationary

---

- [http://www.featflow.de/en/benchmarks/cfdbenchmarking/flow/dfg\\_flow3d/dfg\\_flow3d\\_configuration.html](http://www.featflow.de/en/benchmarks/cfdbenchmarking/flow/dfg_flow3d/dfg_flow3d_configuration.html)

Describe Testing Setup (Boundary conditions and grid). Present results and compare them with literature.

---

#### 8.4.3 Heat-Driven Cavity Flow

---

- [http://www.featflow.de/en/benchmarks/cfdbenchmarking/mit\\_benchmark.html](http://www.featflow.de/en/benchmarks/cfdbenchmarking/mit_benchmark.html)

Describe Testing Setup (Boundary conditions and grid). Present results and compare them with literature.

---

#### 8.5 Realistic Testing Scenario – Complex Geometry

---

---

## 9 Conclusion and Outlook

---

Turbulence (turbulent viscosity has to be updated in each iteration), Multiphase (what about discontinuities), GPU-Accelerators, Load-Balancing, dynamic mesh refinement, Conjugate Heat Transfer with other requirements for the numerical grid, grid movement, list some papers here) Identify the optimal regimes / conditions for maximizing performance. Each solver concept has its strengths and weaknesses. Try other variants of Projection Methods like SIMPLEC, SIMPLER, PISO or PIMPLE (OpenFOAM)



---

## References

---

- [1] BALAY, S., ABHYANKAR, S., ADAMS, M. F., BROWN, J., BRUNE, P., BUSCHELMAN, K., ELJKHOUT, V., GROPP, W. D., KAUSHIK, D., KNEPLEY, M. G., MCINNES, L. C., RUPP, K., SMITH, B. F. AND ZHANG, H. PETSc users manual. Tech. Rep. ANL-95/11 - Revision 3.5, Argonne National Laboratory, 2014.
- [2] BALAY, S., ABHYANKAR, S., ADAMS, M. F., BROWN, J., BRUNE, P., BUSCHELMAN, K., ELJKHOUT, V., GROPP, W. D., KAUSHIK, D., KNEPLEY, M. G., MCINNES, L. C., RUPP, K., SMITH, B. F. AND ZHANG, H. PETSc Web page. <http://www.mcs.anl.gov/petsc>, 2014.
- [3] BALAY, S., GROPP, W. D., MCINNES, L. C. AND SMITH, B. F. Efficient management of parallelism in object oriented numerical software libraries. In *Modern Software Tools in Scientific Computing* (1997), E. Arge, A. M. Bruaset and H. P. Langtangen, Eds., Birkhäuser Press, pp. 163–202.
- [4] CHEN, Z. AND PRZEKOWAS, A. A coupled pressure-based computational method for incompressible/compressible flows. *Journal of Computational Physics* 229, 24 (2010), 9150 – 9165.
- [5] CHOI, S. K. Note on the use of momentum interpolation method for unsteady flows. *Numerical Heat Transfer, Part A: Applications* 36, 5 (1999), 545–550.
- [6] CHOI, S.-K., KIM, S.-O., LEE, C.-H. AND CHOI, H.-K. Use of the momentum interpolation method for flows with a large body force. *Numerical Heat Transfer, Part B: Fundamentals* 43, 3 (2003), 267–287.
- [7] CHRISTON, M. A., GRESHO, P. M. AND SUTTON, S. B. Computational predictability of time-dependent natural convection flows in enclosures (including a benchmark solution). *International Journal for Numerical Methods in Fluids* 40, 8 (2002), 953–980.
- [8] DAHMEN, W. AND REUSKEN, A. *Numerik für Ingenieure und Naturwissenschaftler*, 2. ed. Springer Verlag, Berlin, 2008.
- [9] DARWISH, M., SRAJ, I. AND MOUKALLED, F. A coupled finite volume solver for the solution of incompressible flows on unstructured grids. *Journal of Computational Physics* 228, 1 (2009), 180 – 201.
- [10] FALK, U. AND SCHÄFER, M. A fully coupled finite volume solver for the solution of incompressible flows on locally refined non-matching block-structured grids. In *Adaptive Modeling and Simulation 2013* (Barcelona, Spain, June 2013), J. P. M. de Almeida, P. Diez, C. Tiago and N. Parez, Eds., pp. 235–246.
- [11] FERZIGER, J. H. AND PERIĆ, M. *Numerische Strömungsmechanik*. Springer Verlag, Berlin, 2002.
- [12] GALPIN, P. F. AND RAITHEY, G. D. Numerical solution of problems in incompressible fluid flow: Treatment of the temperature-velocity coupling. *Numerical Heat Transfer* 10, 2 (1986), 105–129.
- [13] GALPIN, P. F. AND RAITHEY, G. D. Numerical solution of problems in incompressible fluid flow: Treatment of the temperature-velocity coupling. *Numerical Heat Transfer* 10, 2 (1986), 105–129.
- [14] GRESHO, P. M. AND SANI, R. L. On pressure boundary conditions for the incompressible navier-stokes equations. *International Journal for Numerical Methods in Fluids* 7, 10 (1987), 1111–1145.
- [15] HAGER, G. AND WELLEIN, G. *Introduction to High Performance Computing for Scientists and Engineers*. CRC, Boca Raton, 2011.
- [16] HUI, W. Exact solutions of the unsteady two-dimensional navier-stokes equations. *Journal of Applied Mathematics and Physics ZAMP* 38, 5 (1987), 689–702.
- [17] JASAK, H. *Error Analysis and Estimation for the Finite Volume Method with Applications to Fluid Flows*. PhD thesis, Imperial College of Science, Technology and Medicine, Jun 1996.
- [18] KUNDU, P. K., COHEN, I. M. AND DOWNLING, D. R. *Fluid Mechanics*, 5 ed. Elsevier, 2012.
- [19] LI, W., YU, B., WANG, X.-R. AND SUN, S.-Y. Calculation of cell face velocity of non-staggered grid system. *Applied Mathematics and Mechanics* 33, 8 (2012), 991–1000.
- [20] MAJUMDAR, S. Role of underrelaxation in momentum interpolation for calculation of flow with nonstaggered grids. *Numerical Heat Transfer* 13, 1 (1988), 125–132.

- 
- [21] MEISTER, A. *Numerik linearer Gleichungssysteme*, 4. ed. Vieweg+Teubner, Wiesbaden, 2011.
- [22] MILLER, T. F. AND SCHMIDT, F. W. Use of a pressure-weighted interpolation method for the solution of the incompressible navier-stokes equations on a nonstaggered grid system. *Numerical Heat Transfer* 14, 2 (1988), 213–233.
- [23] PATANKAR, S. AND SPALDING, D. A calculation procedure for heat, mass and momentum transfer in three-dimensional parabolic flows. *International Journal of Heat and Mass Transfer* 15, 10 (1972), 1787 – 1806.
- [24] PERIĆ, M. Analysis of pressure-velocity coupling on nonorthogonal grids. *Numerical Heat Transfer* 17 (Jan. 1990), 63–82.
- [25] RAMAMURTI, R. AND LÖHNER, R. A parallel implicit incompressible flow solver using unstructured meshes. *Computers & Fluids* 25, 2 (1996), 119 – 132.
- [26] RHIE, C. M. AND CHOW, W. L. Numerical study of the turbulent flow past an airfoil with trailing edge separation. *AIAA Journal* 21 (Nov. 1983), 1525–1532.
- [27] SALARI, K. AND KNUPP, P. Code verification by the method of manufactured solutions. Tech. Rep. SAND2000-1444, Sandia National Labs., Albuquerque, NM (US); Sandia National Labs., Livermore, CA (US), Jun 2000.
- [28] SCHÄFER, M. *Numerik im Maschinenbau*. Springer Verlag, Berlin, 1999.
- [29] SCHÄFER, M. AND TUREK, S. Recent benchmark computations of laminar flow around a cylinder, 1996.
- [30] SHEU, T. W. H. AND LIN, R. K. Newton linearization of the incompressible navier–stokes equations. *International Journal for Numerical Methods in Fluids* 44, 3 (2004), 297–312.
- [31] SPURK, J. H. AND AKSEL, N. *Strömungslehre: Einführung in die Theorie der Strömungen*, 8. ed. Springer Verlag, Berlin, 2010.
- [32] VAKILIPOUR, S. AND ORMISTON, S. J. A coupled pressure-based co-located finite-volume solution method for natural-convection flows. *Numerical Heat Transfer, Part B: Fundamentals* 61, 2 (2012), 91–115.
- [33] VAN DOORMAAL, J. P. AND RAITHBY, G. D. Enhancements of the simple method for predicting incompressible fluid flows. *Numerical Heat Transfer* 7, 2 (1984), 147–163.
- [34] ZHANG, S., ZHAO, X. AND BAYYUK, S. Generalized formulations for the rhie–chow interpolation. *Journal of Computational Physics* 258, 0 (2014), 880 – 914.