


1. Transmission
2. Nut
3. Stud
4. Locking lugs

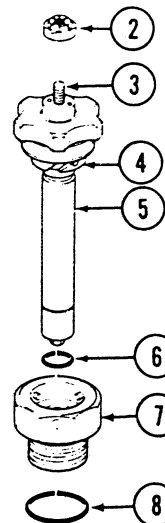

DETAIL A

5. Chip detector element
6. Packing
7. Chip detector housing
8. Packing

TORQUE
 280 TO 300 IN-LBS
 (31.7 TO 33.9 Nm)
LOCKWIRE
 (MS20995C32)

Figure 63-19. Main input quill electric chip detector