


LEFT CYCLIC SWASHPLATE
HORN/BOOST CYLINDER
ATTACHMENT

MAGNETIC RPM SENSOR
BRACKET LOCATION

TORQUE
75 to 95 IN-LBS
(8.475 to 10.735 Nm)

LOCATION OF MAGNETIC RPM SENSOR

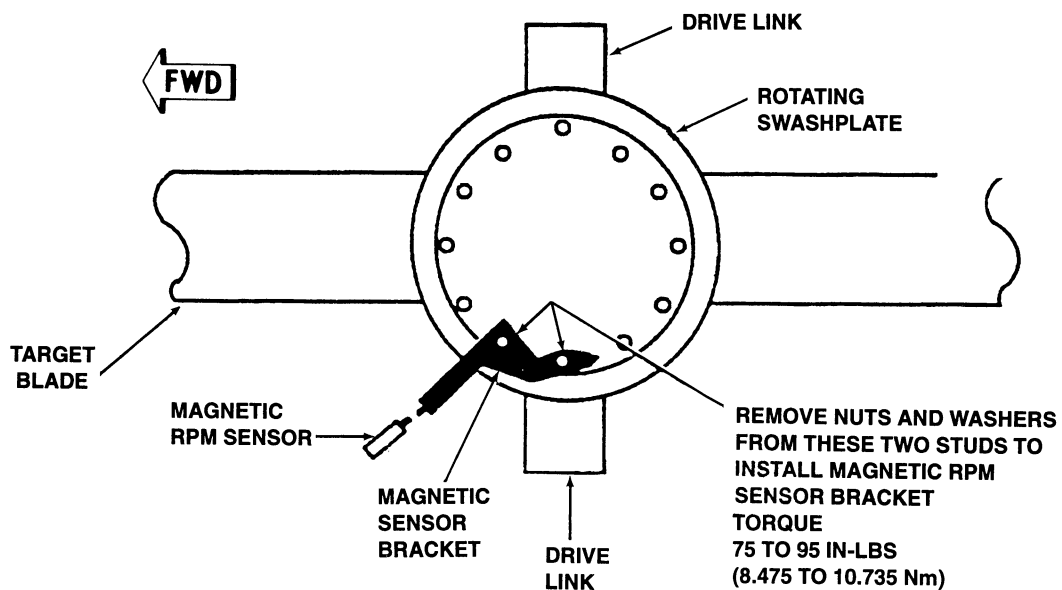

MAGNETIC RPM SENSOR INSTALLATION

212-M-18-7

Figure 18-7. Magnetic pickup and interrupter