



ACCELEROMETER
LOCATED AT
12 O'CLOCK WITH
CONNECTOR UP

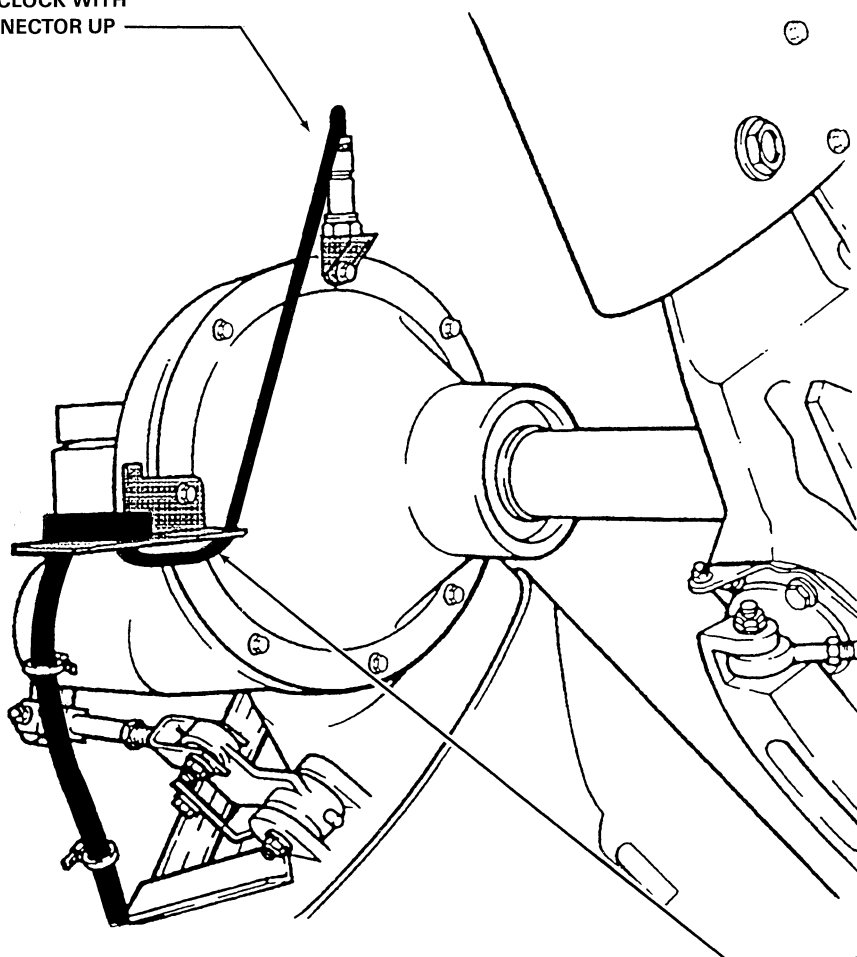

OPTICAL SENSOR
LOCATED AT 9 O'CLOCK
WITH LENS TOWARD TAIL
ROTOR

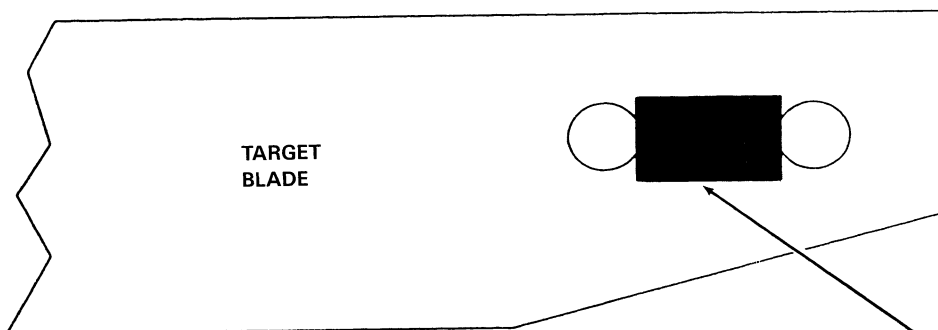

TARGET
BLADE

REFLECTIVE TAPE
LOCATED BETWEEN
BLADE BOLTS ON SIDE OF
TARGET BLADE NEXT TO TAIL FIN

212-M-18-21

Figure 18-21. Accelerometer and optical sensor installation - Tail rotor