

1. Crosstube
2. Upper support
3. Lower support
4. U-bolt
5. Steel washer
6. Nut

**S** SEALANT (C-251)

**T** 80 TO 100 IN-LBS  
(9.04 TO 11.30 Nm)

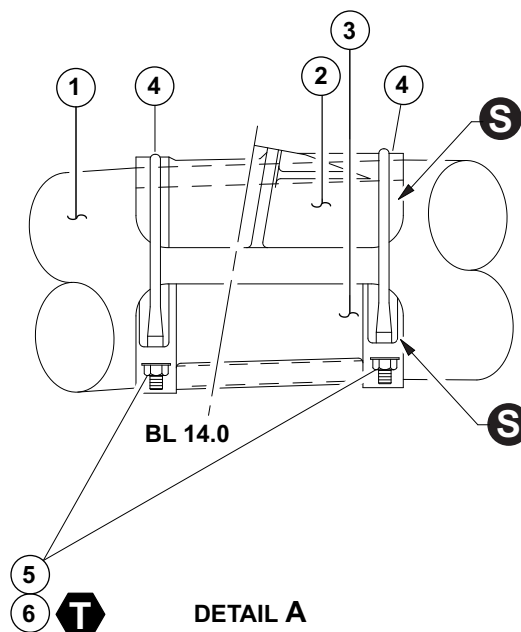


Figure 32-13. Two-piece Supports with U-bolts

212\_MM\_32\_0013