


Transducer with threaded end.

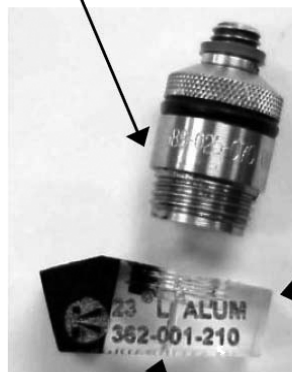


NOTE:

Use a drop of light oil between the transducer and the wedge in order to remove any trapped air.

VIEW A




TOP VIEW

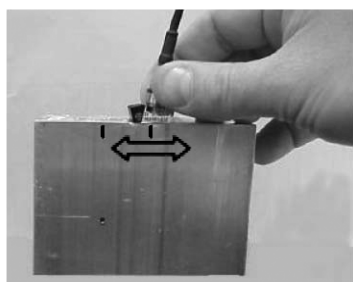

SIDE VIEW


The reflected signal from the "side drilled hole" of the standard.

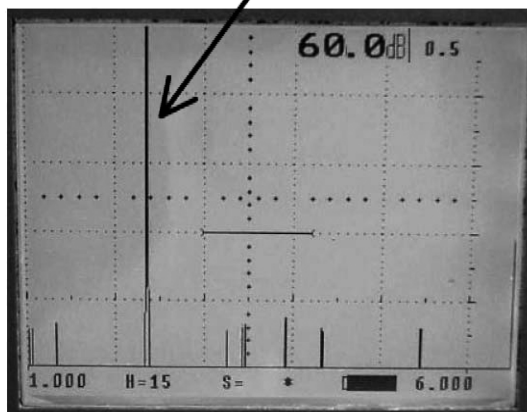


VIEW B

212_MM_62_0002



Figure 62-11. Ultrasonic Test Equipment Calibration (Sheet 1 of 2)

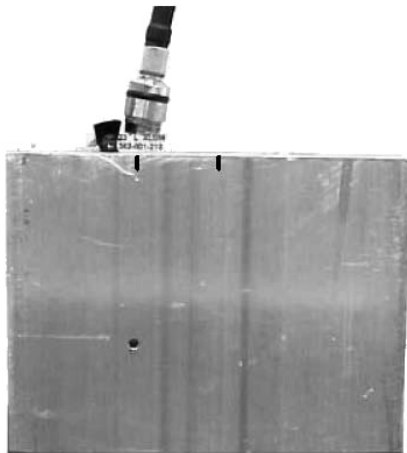

The reflected signal from the
"corner" of the standard.

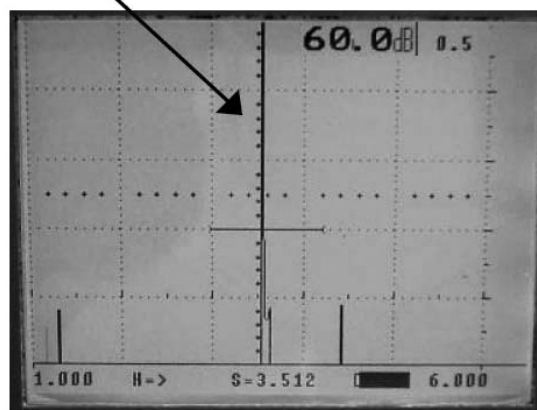

VIEW C

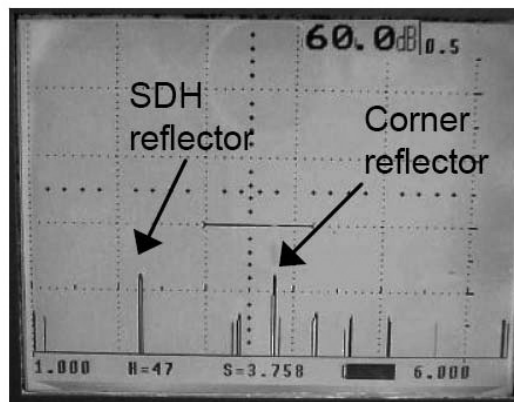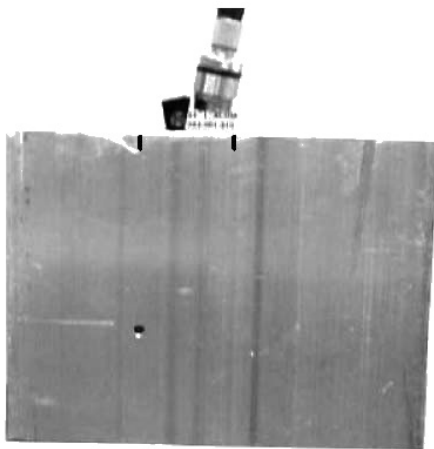

VIEW D

212_MM_62_0003

Figure 62-11. Ultrasonic Test Equipment Calibration (Sheet 2 of 2)