


DETAIL A

- 1. Nut
- 2. Steel washer
- 3. Spacer
- 4. Steel washer
- 5. Washer
- 6. Jackscrew holes

- 7. Tail rotor drive quill
- 8. Packing
- 9. Seal
- 10. Coupling
- 11. Sump assembly

SEE DETAIL A

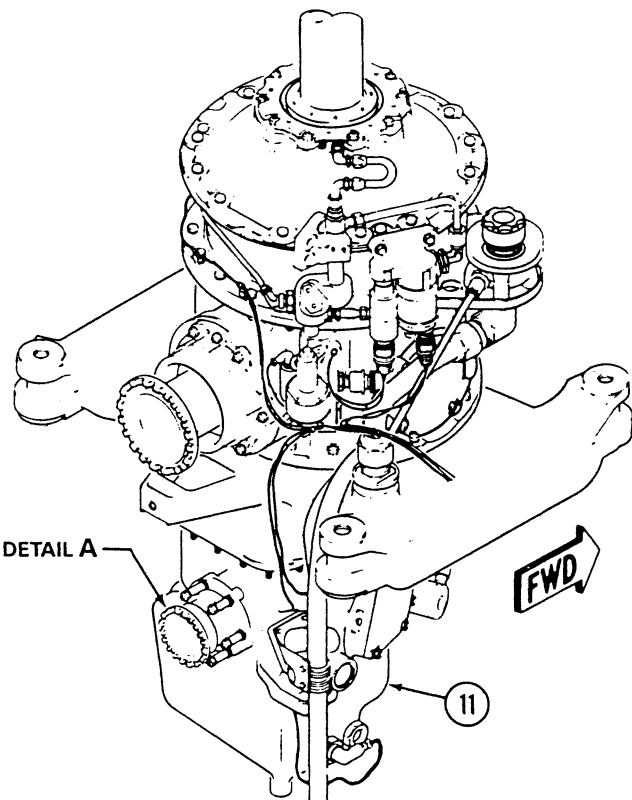

NOTE



Location of temperature indicator TEMP-PLATES. 6000-1 TEMP-PLATE (red border) 2 required -180 degrees apart. Refer to BHT-212-CR&O for installation procedures.

212-M-63-44

Figure 63-44. Tail rotor drive quill