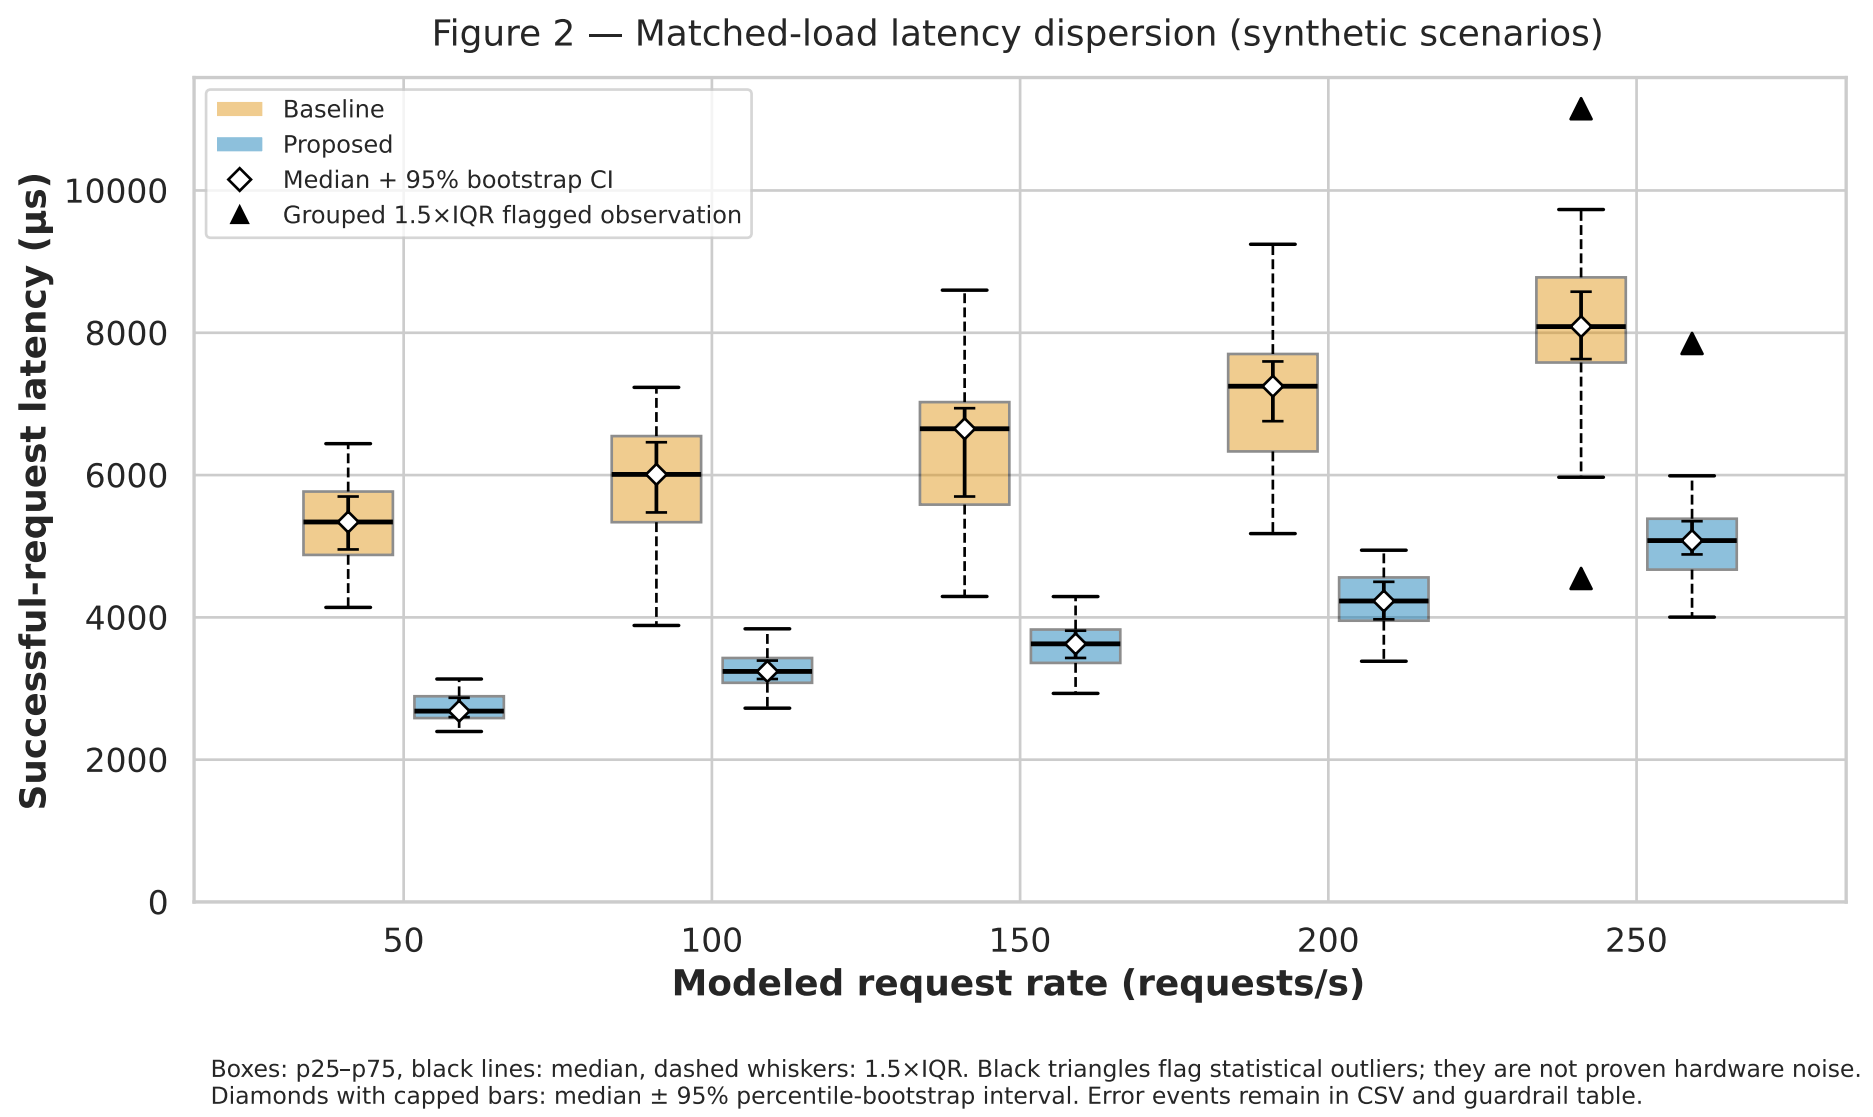
Figure 2 — Matched-load latency dispersion (synthetic scenarios)
Baseline
Proposed
Median + 95% bootstrap CI
Grouped 1.5×IQR flagged observation
Successful-request latency (µs)
0
2000
4000
6000
8000
10000
50
100
150
200
250
Modeled request rate (requests/s)
Boxes: p25–p75, black lines: median, dashed whiskers: 1.5×IQR. Black triangles flag statistical outliers; they are not proven hardware noise.
Diamonds with capped bars: median ± 95% percentile-bootstrap interval. Error events remain in CSV and guardrail table.