

Network Connection Baseline Report

Complete local history from July 02, 2026 00:00 through July 06, 2026 11:26 (America/Hermosillo). Generated July 6, 2026.

NETWORK CONNECTION BASELINE

A compact benchmark for future reports

Jul 02, 2026 00:00 to Jul 06, 2026 11:26 (America/Hermosillo)

Median download

297.4 Mbps

Median upload

64.9 Mbps


Median idle latency

52.0 ms

Healthy full tests

98.2%

Daily median throughput

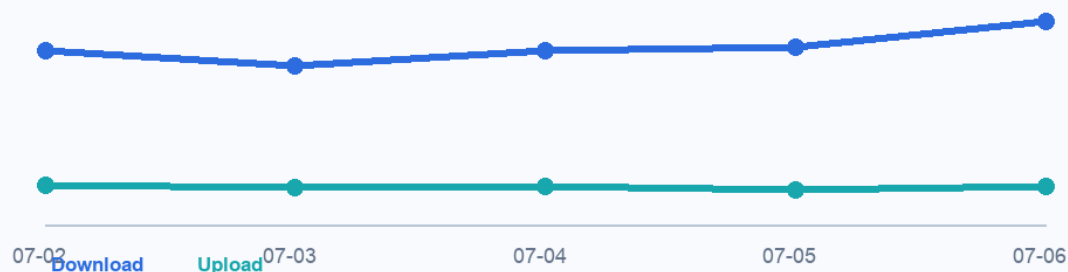

Reliability

Full-test health **98.22%**

Continuous ping success **99.92%**

DNS + HTTPS success **100.00%**

Bottom line. The connection was broadly reliable: 98.2% of complete tests were healthy, continuous ping success exceeded 99.9%, and all sampled DNS and HTTPS checks succeeded. Throughput varied materially, especially download speed, and three complete tests were degraded by packet loss or elevated tail latency.

1. Comparable baseline metrics

Use the same rows in every future report. Medians describe typical performance; P10/P90 and P95 expose variability without allowing rare extreme samples to dominate the comparison.

Metric	Typical	Lower / upper reference	Observed range	Future interpretation
Download throughput	297.4 Mbps	P10 212.8 / P90 363.2 Mbps	26.9 - 406.5 Mbps	Higher is better
Upload throughput	64.9 Mbps	P10 47.2 / P90 79.3 Mbps	22.0 - 91.2 Mbps	Higher is better
Idle latency	52.0 ms	P95 67.0 ms	Complete-run measurements	Lower is better
Tail latency (run p95)	32.5 ms	P95 of run values 52.8 ms	Complete-run measurements	Lower is better
Jitter	4.2 ms	P95 10.8 ms	Complete-run measurements	Lower is better
Packet loss	0.06% mean	Non-zero in 1.2% of runs	Complete-run measurements	Lower is better
Healthy full tests	98.22%	166 of 169	3 degraded; 0 failed	Higher is better
Continuous ping success	99.923%	Router + internet + IPv6	All lightweight ping samples	Higher is better
DNS + HTTPS success	100.000%	Combined service checks	All lightweight checks	Higher is better

Daily comparison

Local date	Full tests	Healthy	Median down	Median up	Median idle	Median run p95	Mean loss
2026-07-02	52	98.1%	299.7 Mbps	67.4 Mbps	49.5 ms	33.9 ms	0.10%
2026-07-03	41	100.0%	274.1 Mbps	63.1 Mbps	49.5 ms	31.7 ms	0.00%
2026-07-04	43	97.7%	298.4 Mbps	66.4 Mbps	54.2 ms	31.4 ms	0.12%
2026-07-05	26	96.2%	304.8 Mbps	60.3 Mbps	54.7 ms	33.1 ms	0.00%
2026-07-06	7	100.0%	349.2 Mbps	65.3 Mbps	55.6 ms	31.3 ms	0.00%

Caution: July 2 and July 6 are partial local days. Compare full periods of equal duration whenever possible.

2. Reliability and incidents

Sample type	Samples	Success	Median latency	P95 latency	Maximum	Interpretation
Router ping	20,256	99.965%	3.7 ms	8.9 ms	902,484.9 ms	Outliers shown separately from robust percentiles
Internet ping	20,256	99.862%	23.9 ms	36.5 ms	398.0 ms	Outliers shown separately from robust percentiles
IPv6 ping	5,055	100.000%	23.9 ms	36.0 ms	14,172.2 ms	Outliers shown separately from robust percentiles
DNS lookup	1,014	100.000%	30.0 ms	51.3 ms	902,564.0 ms	Outliers shown separately from robust percentiles
HTTPS request	1,014	100.000%	219.4 ms	292.1 ms	4,424.6 ms	Outliers shown separately from robust percentiles
Route state	1,014	100.000%	N/A	N/A	N/A	Availability check

Degraded complete tests

Local time	Status	Download	Upload	Idle latency	Reason
2026-07-02 23:55	Degraded	351.7 Mbps	90.0 Mbps	43.2 ms	Packet loss is 5.0%; p95 latency is 279 ms
2026-07-04 12:58	Degraded	316.8 Mbps	68.0 Mbps	59.2 ms	Packet loss is 5.0%
2026-07-05 23:06	Degraded	318.4 Mbps	26.0 Mbps	63.6 ms	p95 latency is 166 ms

Outlier handling

A handful of lightweight samples contain extreme elapsed times near 15 minutes. These can occur when the Mac sleeps, wakes, or a command stalls. They remain part of the maximum column for transparency, but medians and percentiles are the primary comparison statistics. No records were deleted or altered.

Observed limitations

Loaded latency and responsiveness were not recorded in these 169 complete runs, so this report does not infer them. The observation window is only about 4.5 days and includes two partial days; it is a useful baseline, not a long-term service-level conclusion.

3. Methodology and future comparison template

Data source and coverage

Read-only analysis of the local SQLite database. Coverage: 169 complete tests and 48,609 lightweight samples across 4.48 days. Database integrity check: ok. The report excludes interface names, route signatures, resolver or gateway addresses, traceroute details, proxy/VPN hints, and raw errors.

Recommended comparison rules

- Use equal-length windows, ideally 7 or 30 complete local days.
- Compare medians first; use P10/P90 for throughput and P95 for latency/jitter variability.
- Keep full-test health, ping success, and DNS/HTTPS success as separate reliability measures.
- Flag a meaningful change when a core median moves by at least 10%, or reliability changes by at least 0.5 percentage points, while sample counts remain comparable.
- List degraded events and missing metrics explicitly. Do not substitute zero for missing data.

Side-by-side scorecard for the next report

Metric	This baseline	Future period	Change	Preferred direction
Median download	297.4 Mbps			Higher
Median upload	64.9 Mbps			Higher
Median idle latency	52.0 ms			Lower
Median run p95 latency	32.5 ms			Lower
Median jitter	4.2 ms			Lower
Mean packet loss	0.06%			Lower
Healthy full tests	98.22%			Higher
Continuous ping success	99.923%			Higher
DNS + HTTPS success	100.000%			Higher

Assessment

This baseline indicates a fast connection with strong availability but noticeable throughput variation and occasional tail-latency or packet-loss degradation. The highest-value next comparison is a complete seven-day window using the same metrics, especially if it captures both busy and quiet hours.