

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Pinout view

System view

Q



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WWDG


Analog >

Timers >

Connectivity >

Computing >

Middleware and Software Pac...>

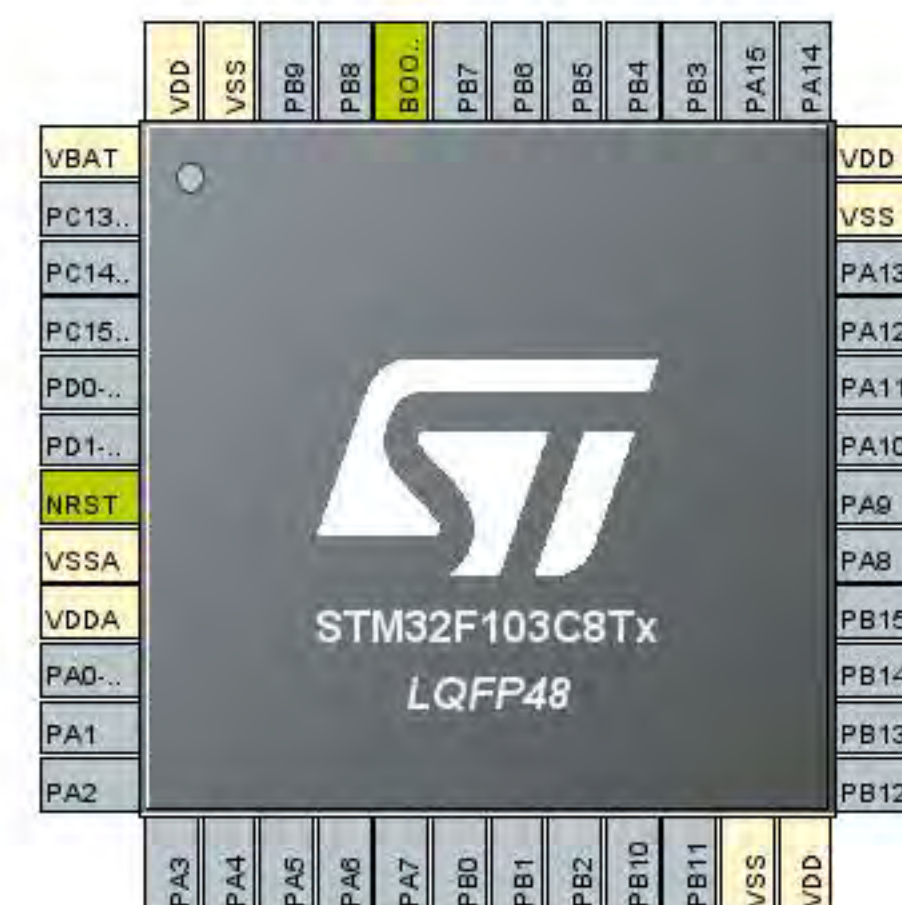

Q

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Q



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WWDG

Analog >

Timers >

Connectivity >

Computing >

Middleware and Softwa...>

SYS Mode and Configuration

Mode

Debug No Debug

☐ Sys No Debug

Timeba Serial Wire

JTAG (4 pins)

JTAG (5 pins)


Trace Asynchronous Sw

Configuration

Warning: This peripheral has no parameters to be configured.

Pinout view

System view

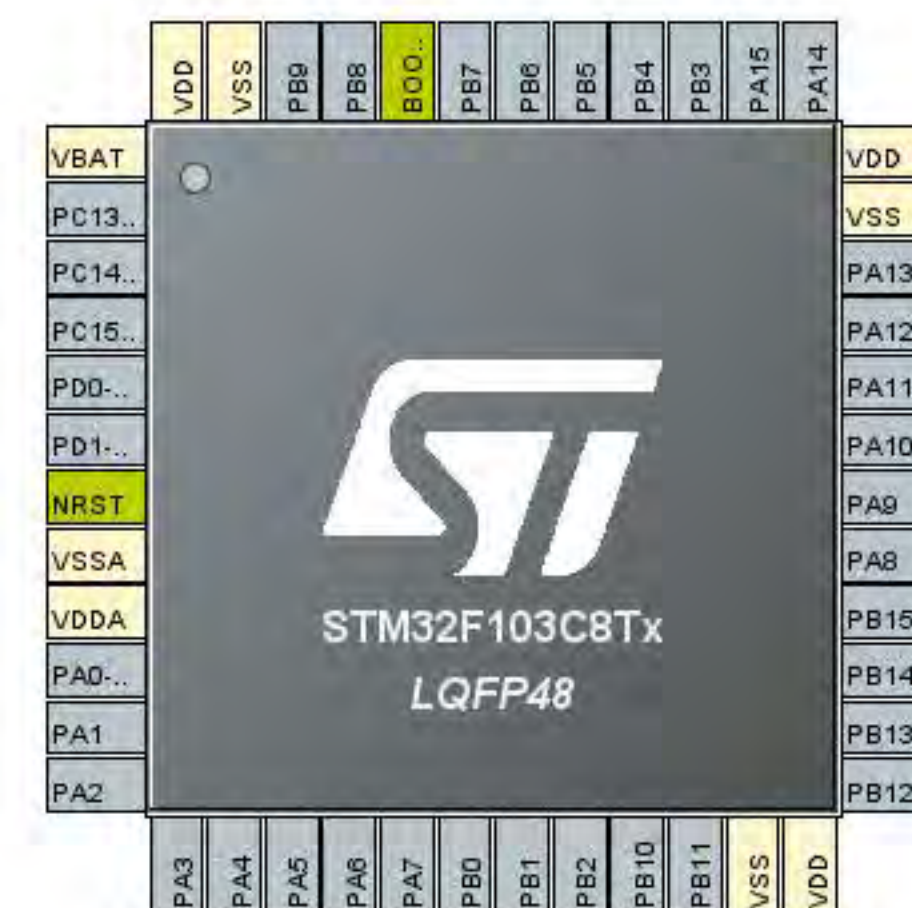

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WWDG

Analog >

Timers >

Connectivity >

Computing >

Middleware and Softwa...>

SYS Mode and Configuration

Mode

Debug Serial Wire

☐ System Wake-Up


Timebase Source SysTick

Configuration

Warning: This peripheral has no parameters to be configured.

Pinout view

System view

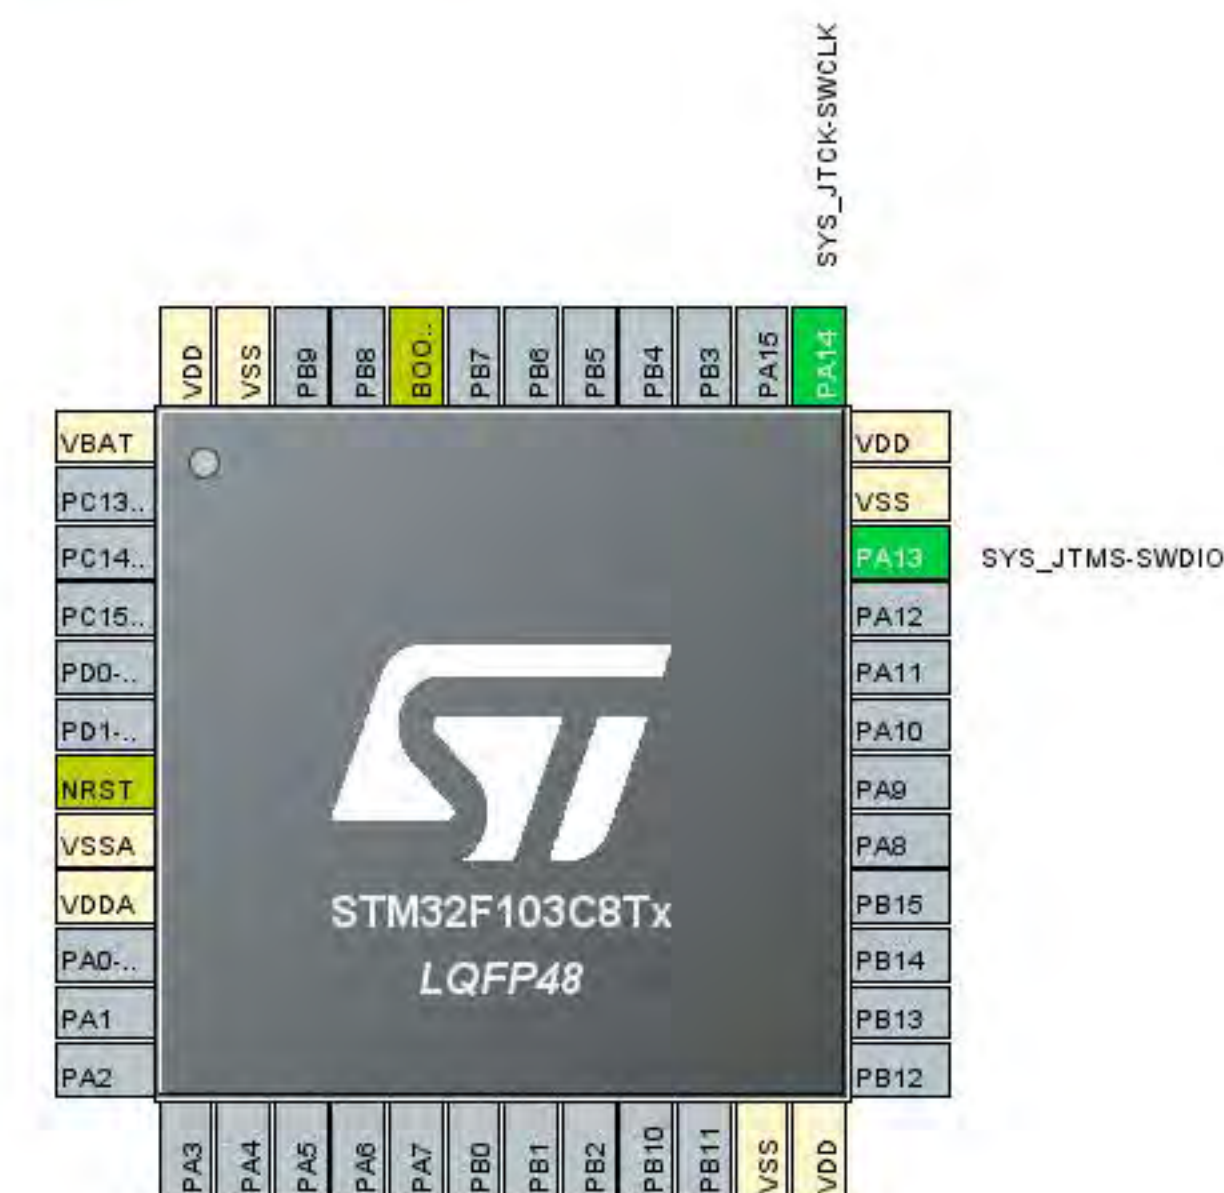

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Q



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WW

RCC :

[Reset and Clock Controller details and documentation \(Ctrl+d\)...](#)

Analog >

Timers >

Connectivity >

Computing >

Middleware and Softwa...>

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Disable

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

✓ Parameter Settings ✓ User Constants ✓ NVIC Settings

Configure the below parameters :

Q Search (Ctrl+F)



System Parameters


VDD voltage (V) 3.3 V

Prefetch Buffer Enabled

Flash Latency(WS) 0 WS (1 CPU cycle)

Pinout view

System view

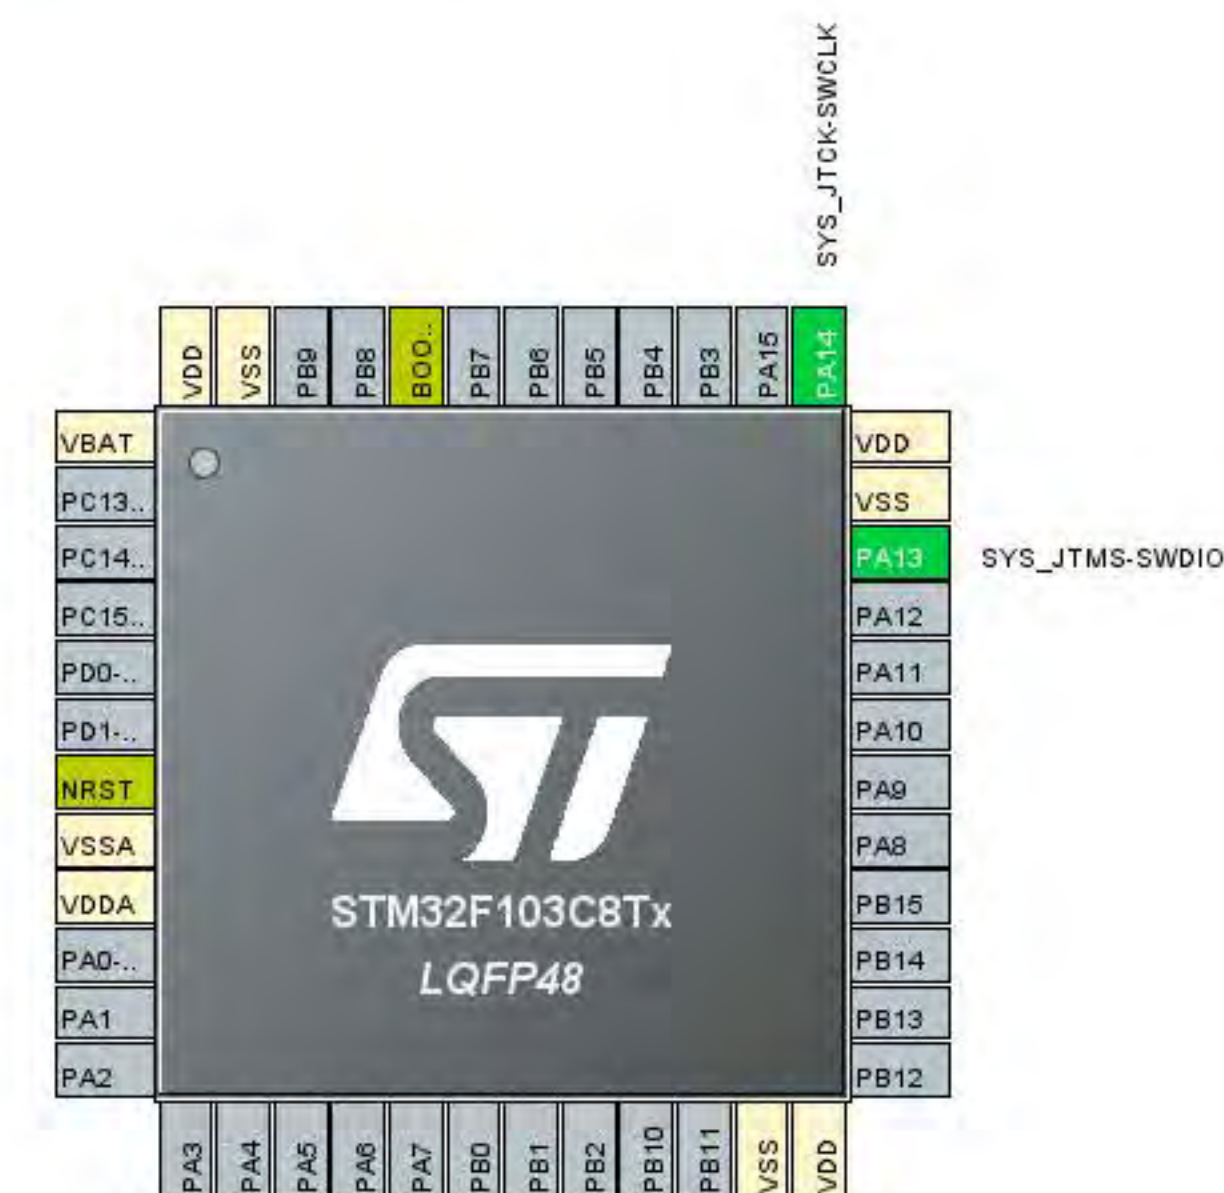

Pinout & Configuration


Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

RCC

✓ SYS

WWDG

Analog >

Timers >

Connectivity >

Computing >

Middleware and Softwa...>

RCC Mode and Configuration

Mode

- High Speed Clock (HSE) Disable
- Low Speed Clock (LSE) Disable
- ☐ Master Clock Output
- BYPASS Clock Source
- Crystal/Ceramic Resonator

Configuration

Reset Configuration

☒ Parameter Settings ☒ User Constants ☒ NVIC Settings

Configure the below parameters :

Search (Ctrl+F)

System Parameters


VDD voltage (V) 3.3 V

Prefetch Buffer Enabled

Flash Latency(WS) 0 WS (1 CPU cycle)

Pinout view

System view

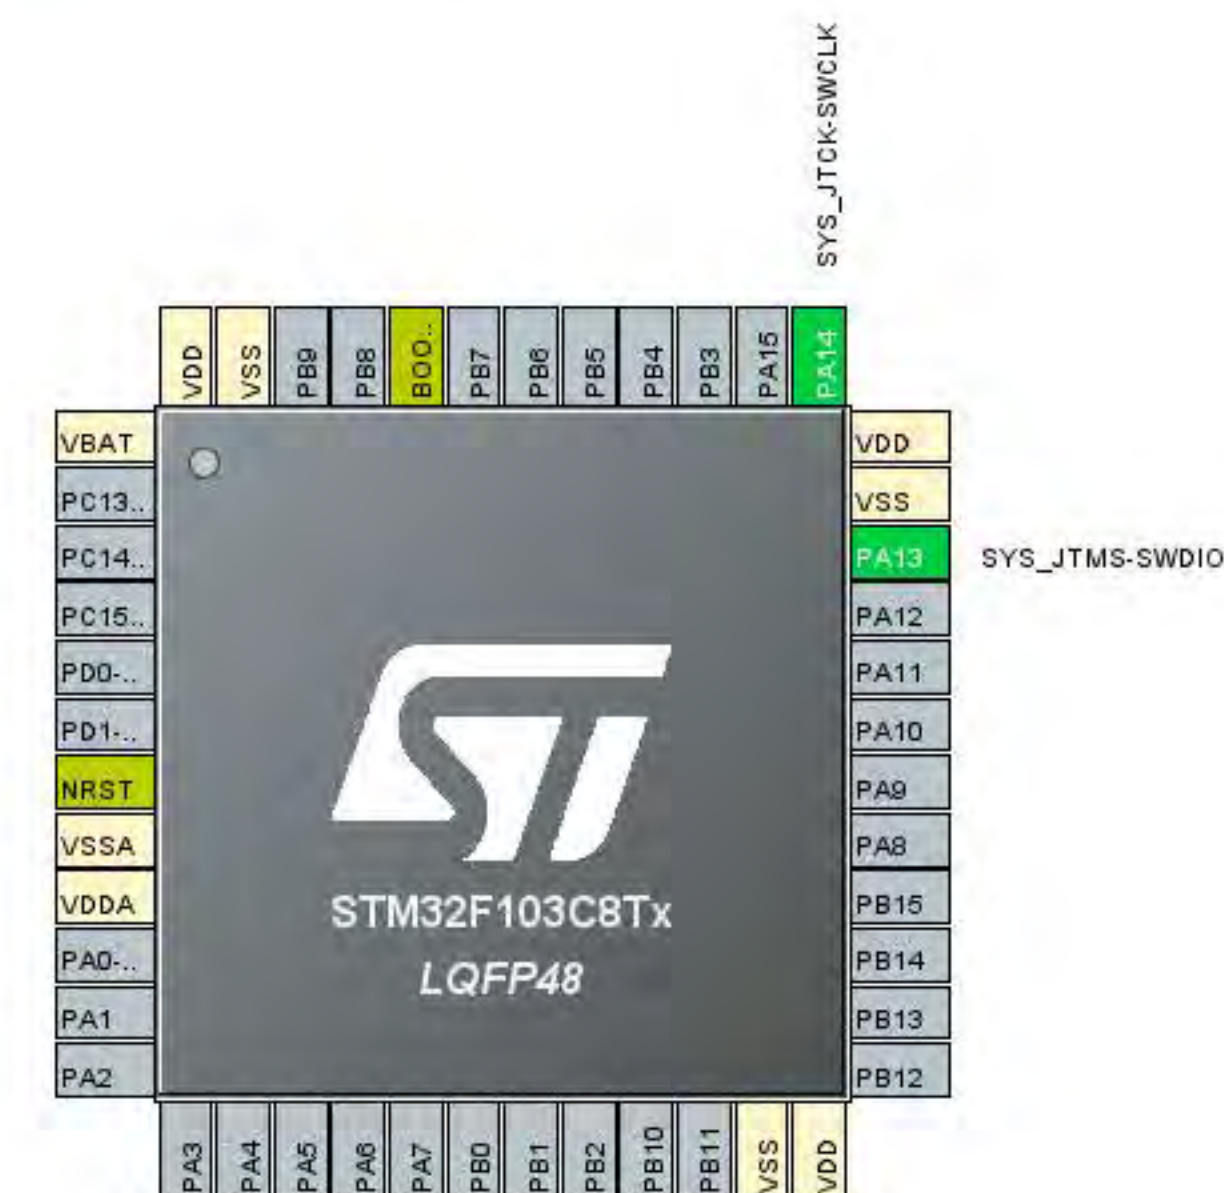

Pinout & Configuration


Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog >

Timers >

RTC

TIM1

TIM2

TIM3

TIM4

TIM3 :

General purpose timer

[details and documentation \(Ctrl+d\)](#)

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator

Low Speed Clock (LSE) Disable

☐ Master Clock Output

Configuration

Reset Configuration

✓ NVIC Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)

Parameters

VDD voltage (V)


3.3 V

Prefetch Buffer

Enabled

Pinout view

System view

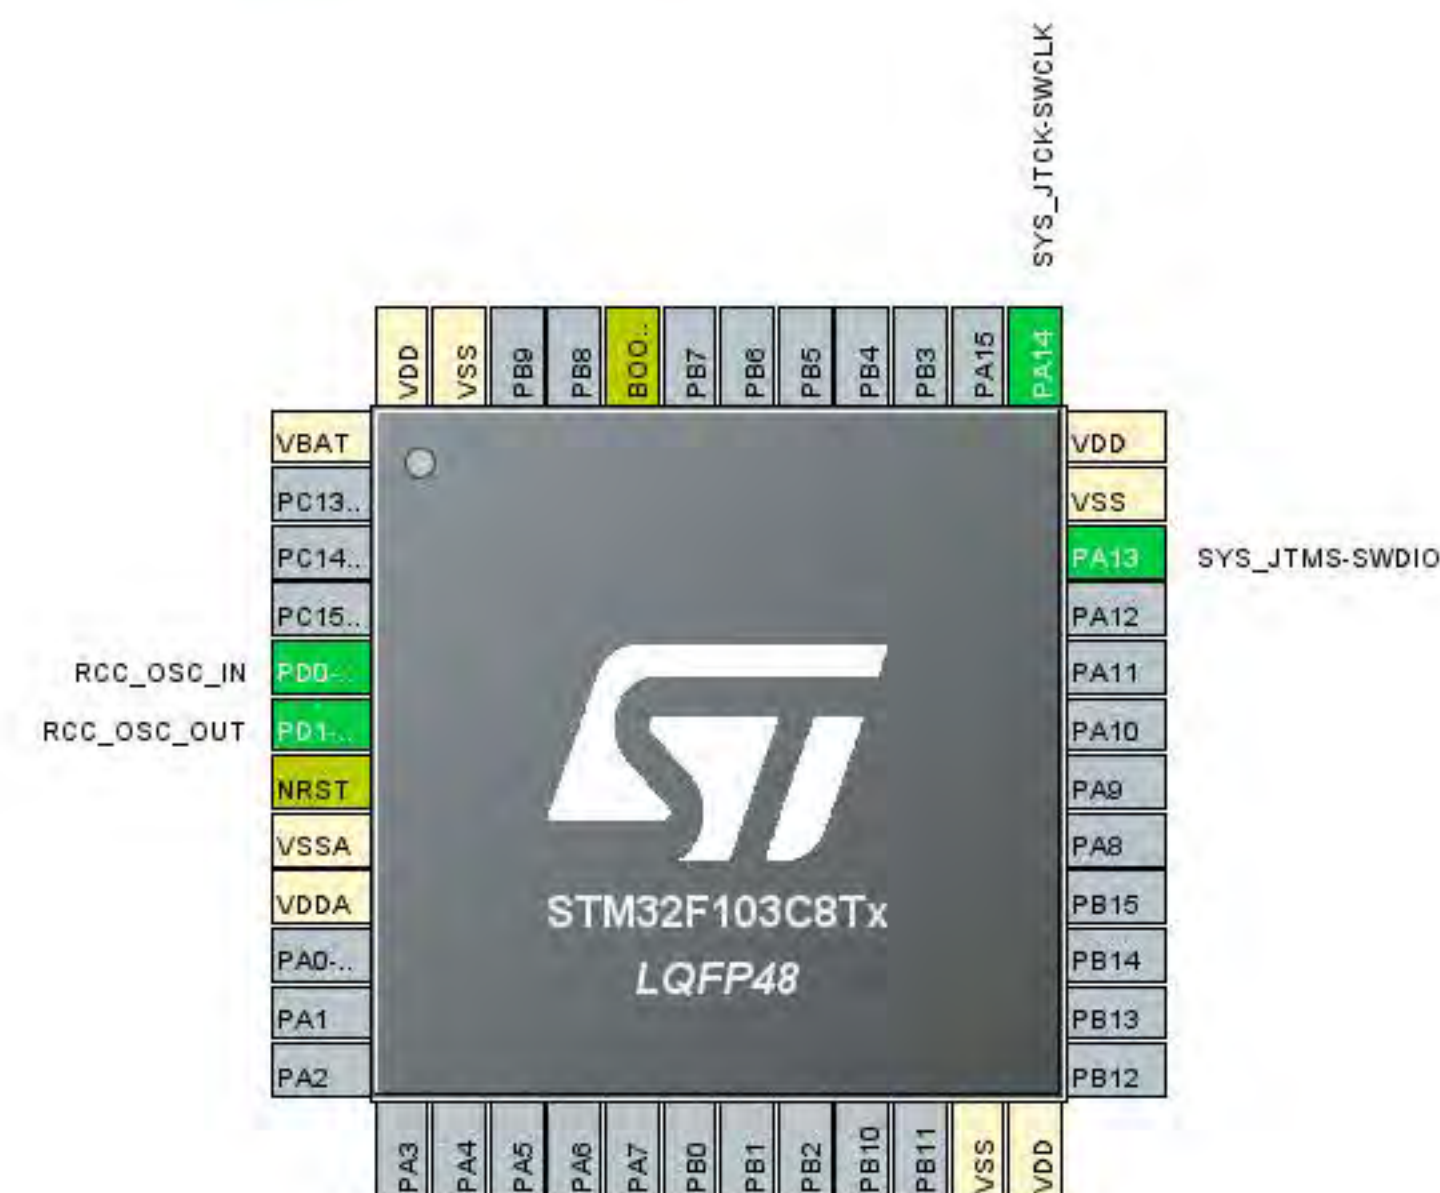

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Q



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Channel1 Disable

Channel2 Disable

Channel3 Disable

Channel4 Disable

Combined Channels Disable

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Q Search (Ctrl+F)




Counter Settings

Prescaler (PSC - 16 bits...) 0

Counter Mode Up

Pinout view

System view

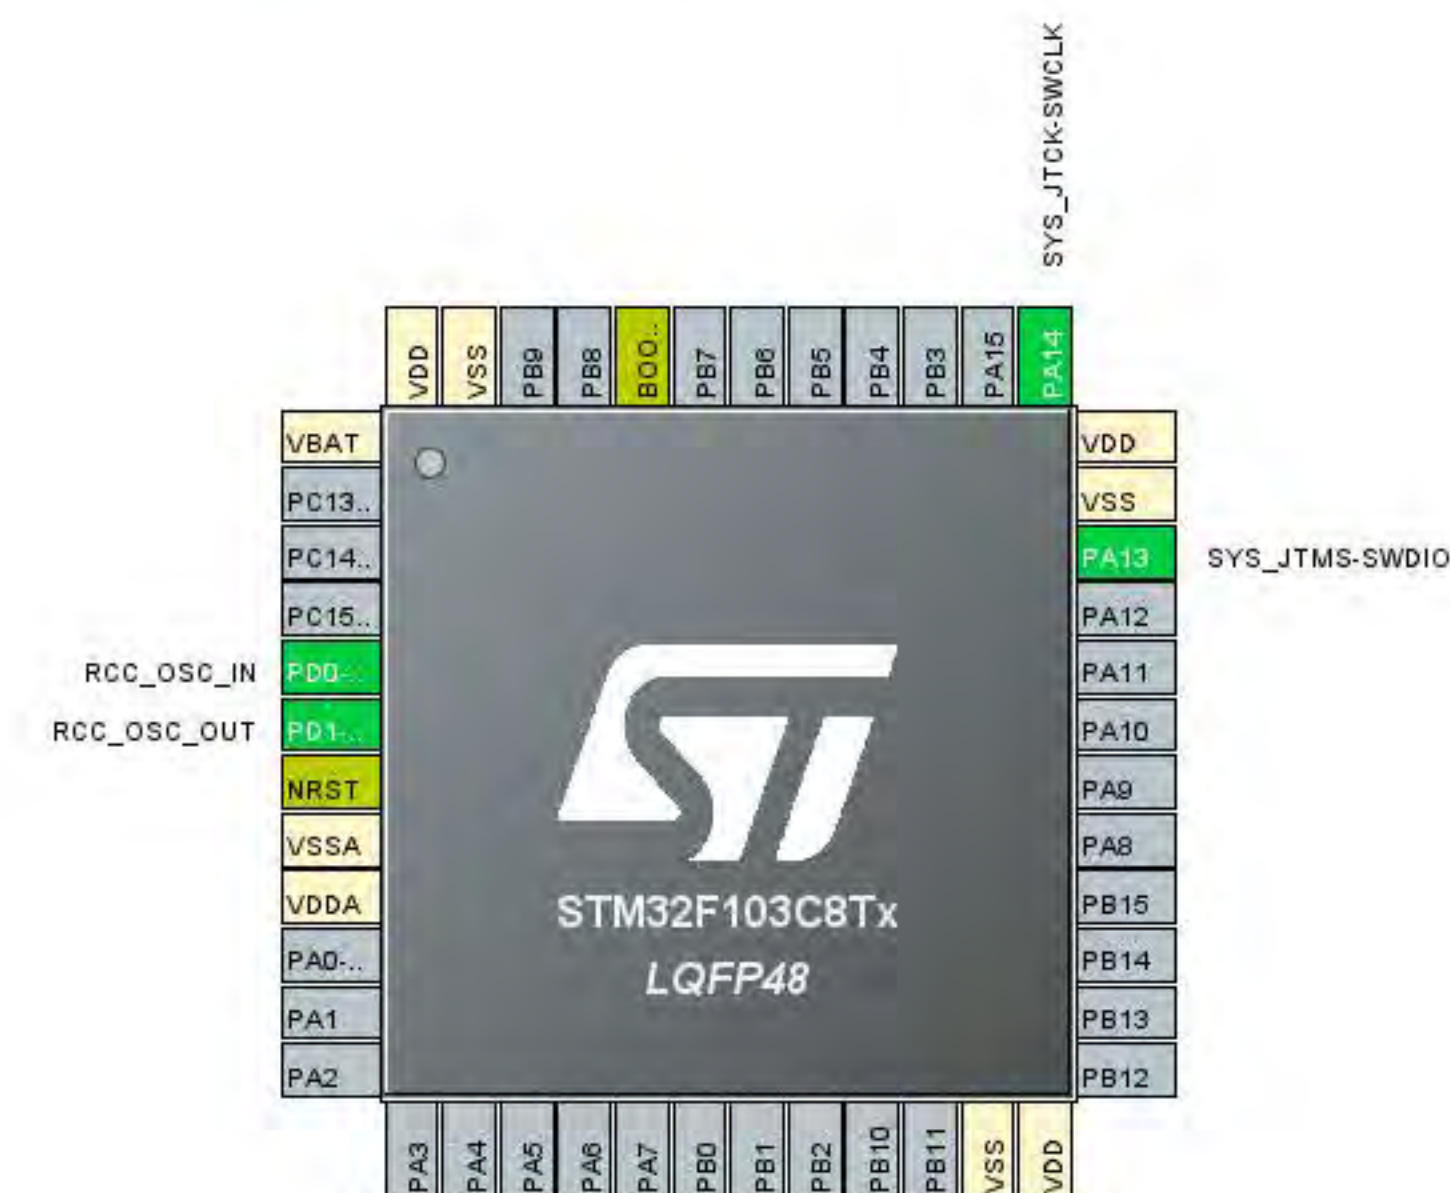

Pinout & Configuration


Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits ... 7199

Counter Mode Up

Counter Period (AutoRelo... 4999

Internal Clock Division (C... No Division

auto-reload preload Disable


Trigger Output (TRGO) Paramet...

Master/Slave Mode (MS... Disable (Trigger input effect not del...

Trigger Event Selection Reset (UG bit from TIMx_EGR)

Pinout view

System view

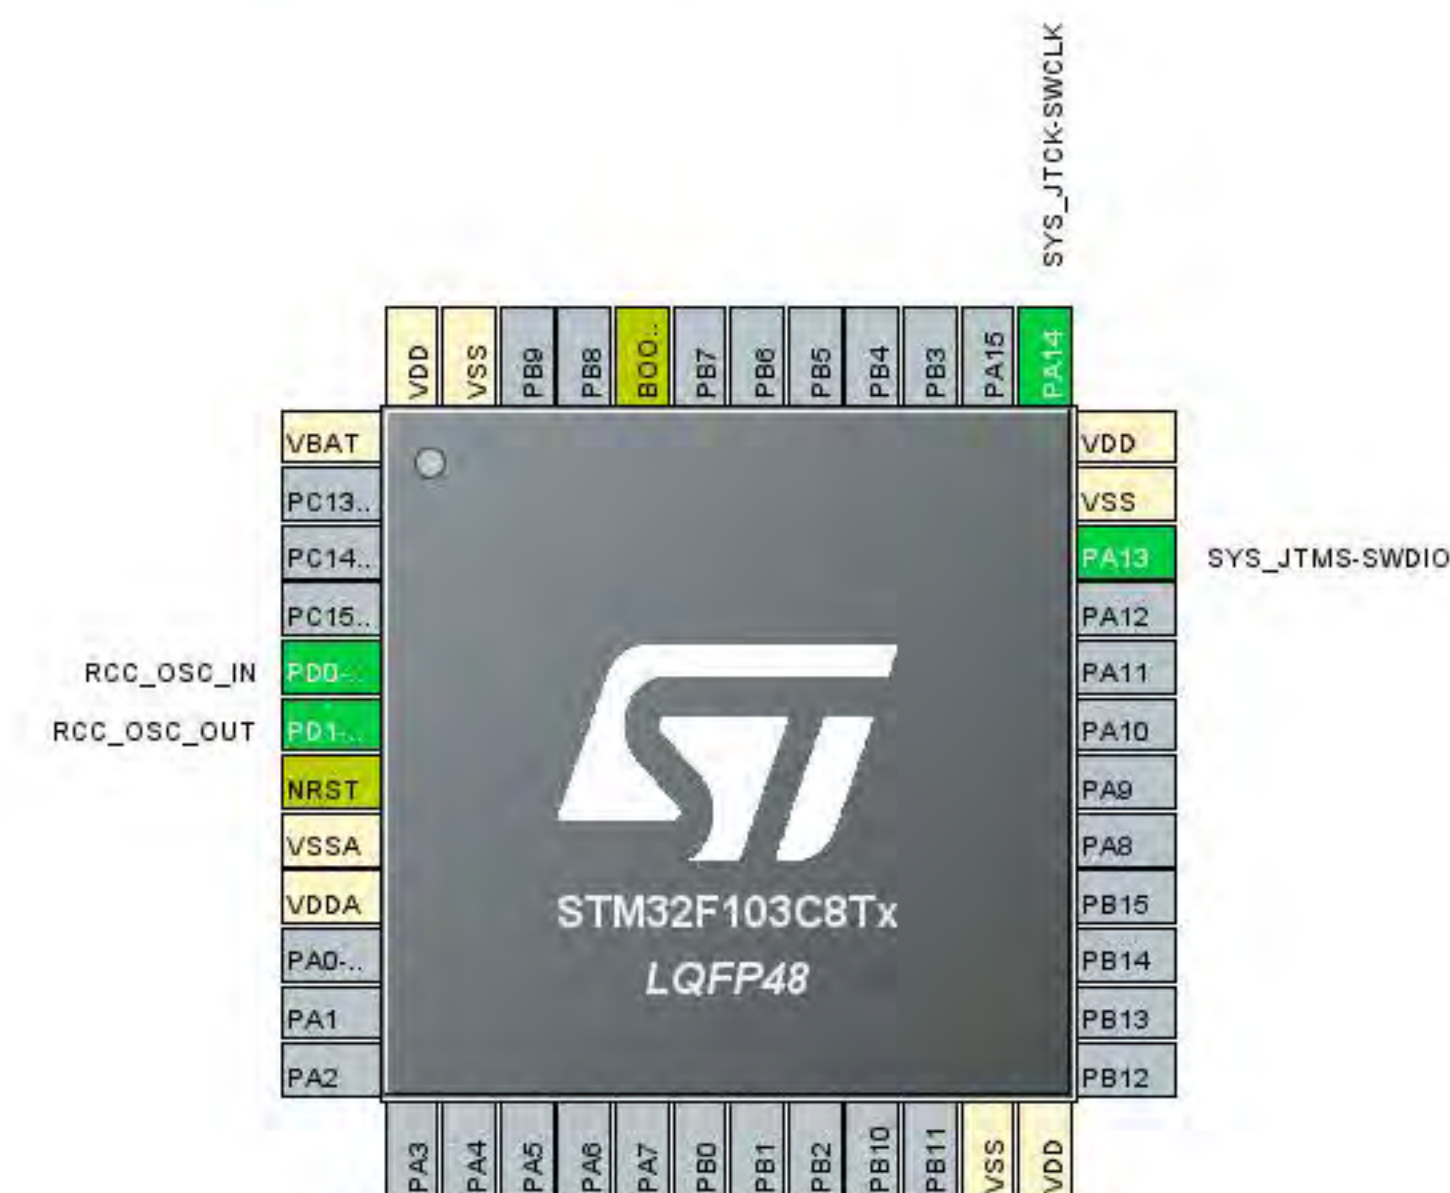

Pinout & Configuration


Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

TIM3 Mode and Configuration

Mode

Slave Mode Disable

Trigger Source Disable

☒ Internal Clock

Configuration

Reset Configuration

✓ NVIC Settings

✓ DMA Settings


✓ Parameter Settings

✓ User Constants

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

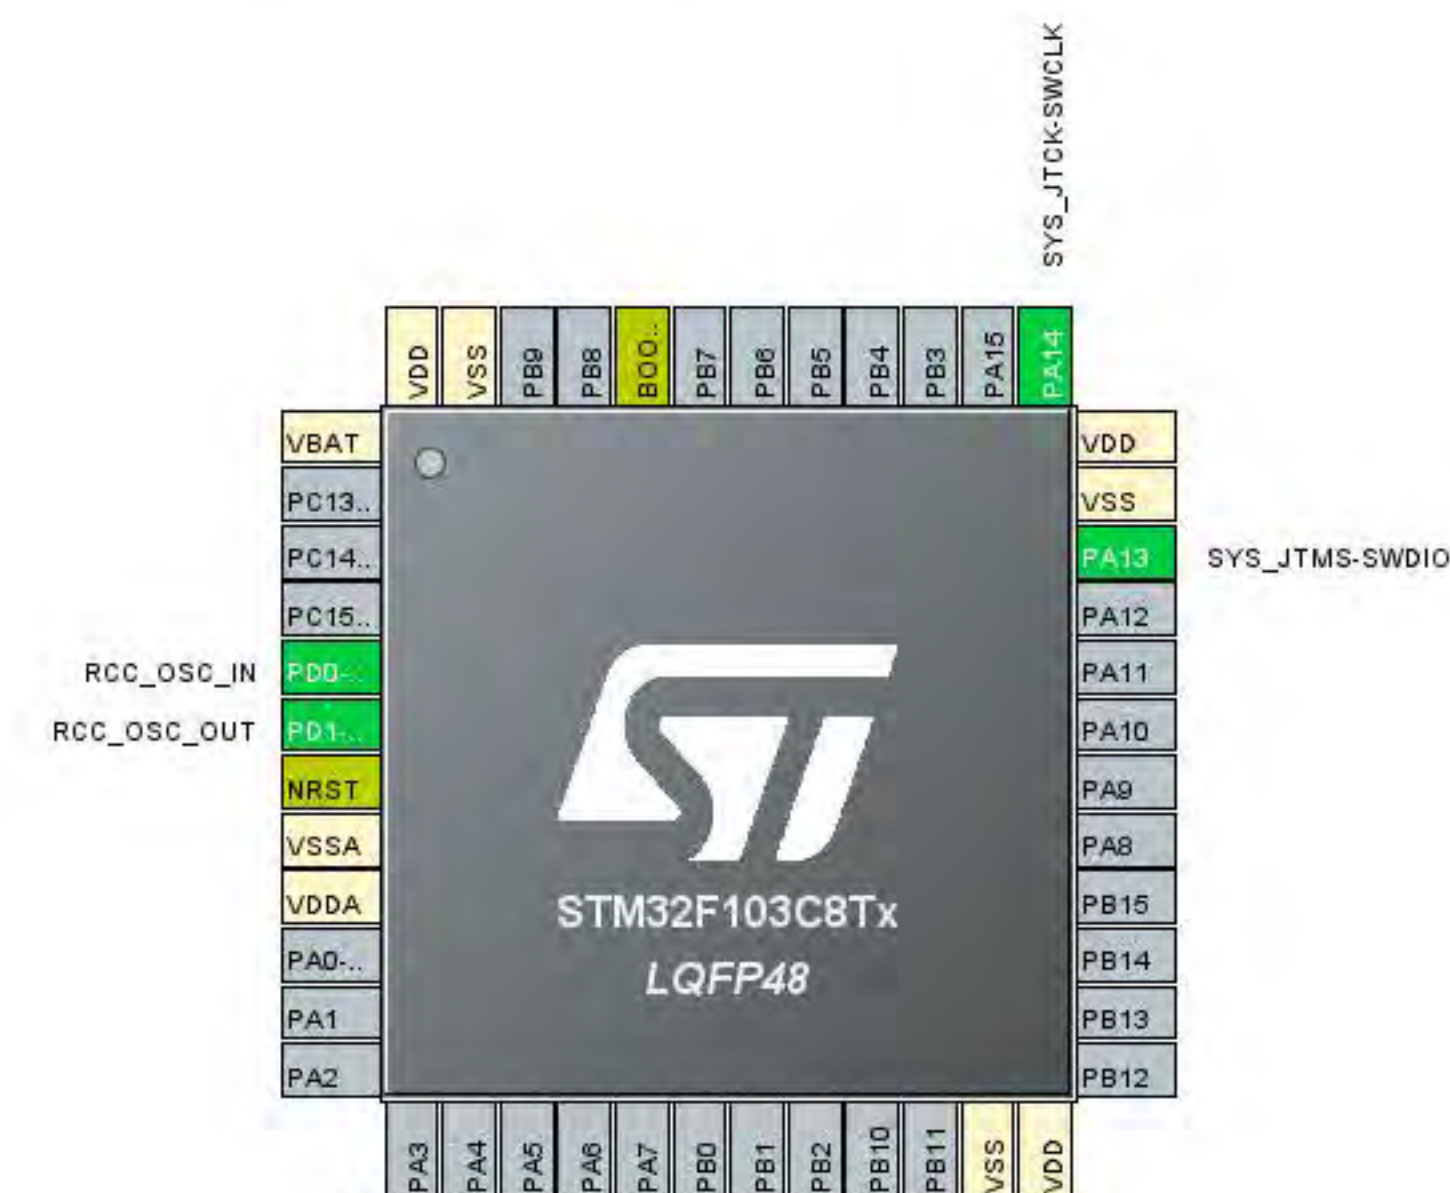

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

I2C2 Mode and Configuration

Mode

I2C Disable

Configuration

Q



Categories A->Z

TIM1

TIM2

✓ TIM3

TIM4

Connectivity

CAN

I2C1

I2C2

SPI1

SPI2

USART

USART

USART3

USB

Computing

Middleware and Softw...>


I2C2 :

Inter Integrated Circuit

[details and documentation \(Ctrl+d\)...](#)

Pinout view

System view

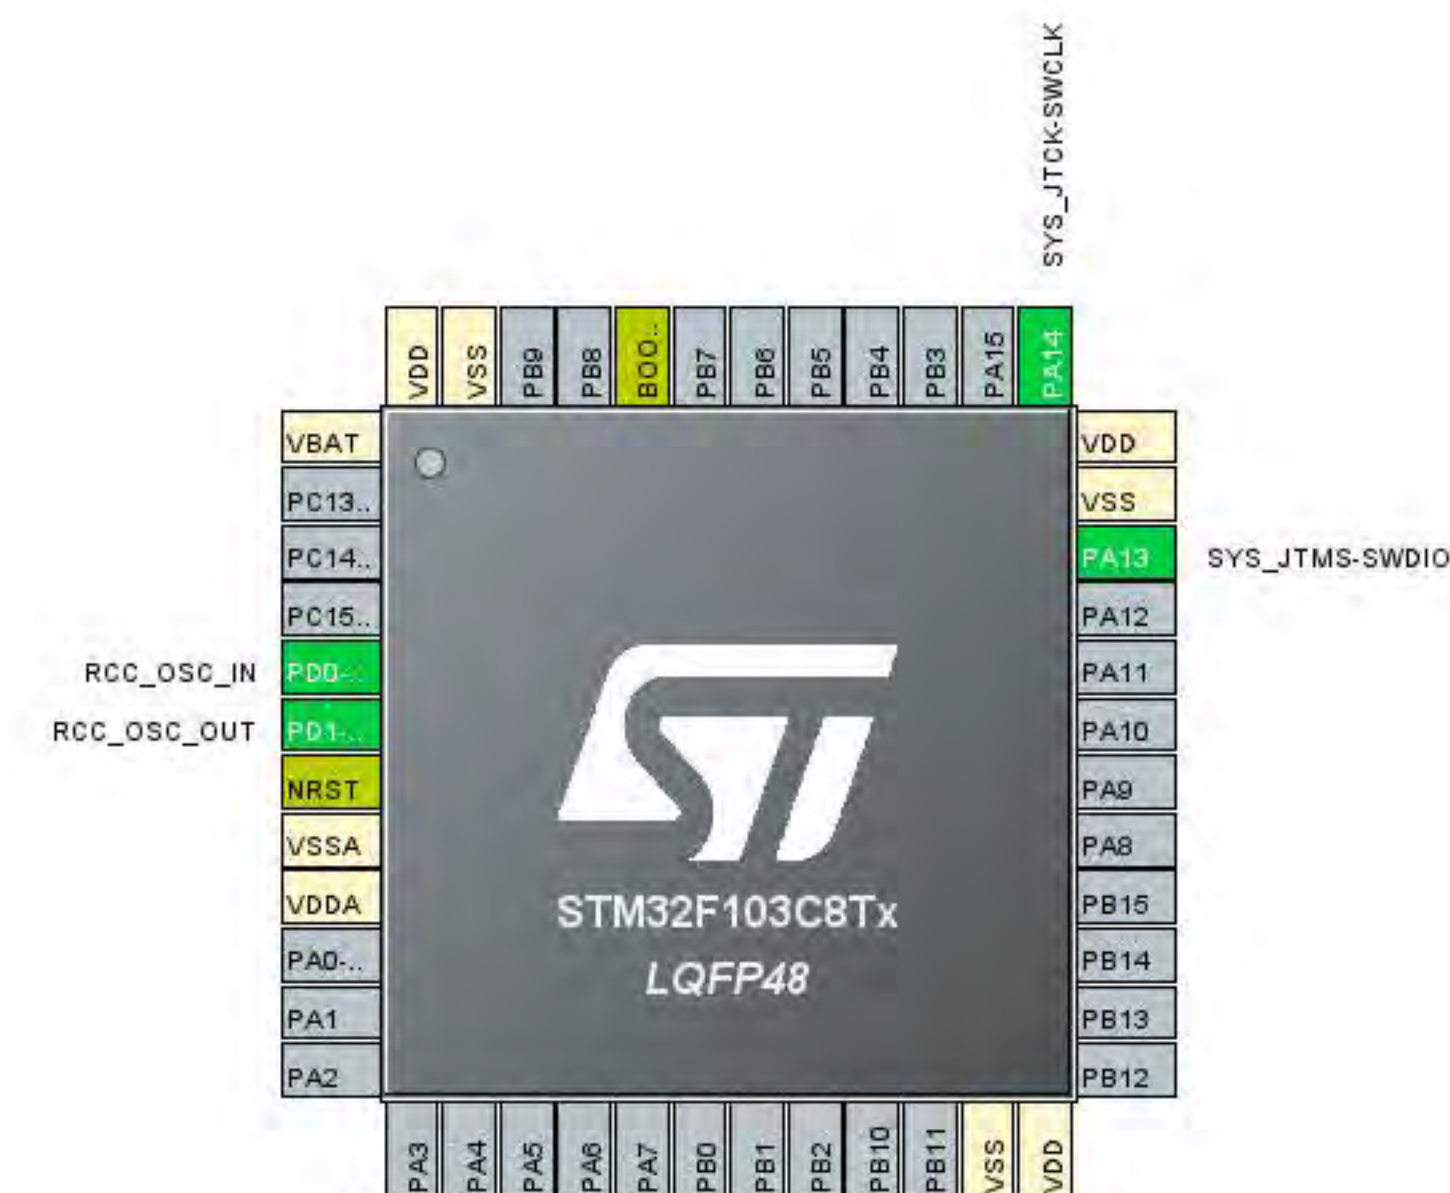

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Q



Categories A->Z

TIM1
TIM2
✓ TIM3
TIM4

Connectivity

CAN
I2C1
I2C2
SPI1
SPI2
USART1
USART2
USART3
USB

Computing

Middleware and Softw...>


I2C2 Mode and Configuration

Mode

I2C Disable
Disable
I2C
SM Bus-Alert-mode
SM Bus-two-wire-Interface

Pinout view

System view

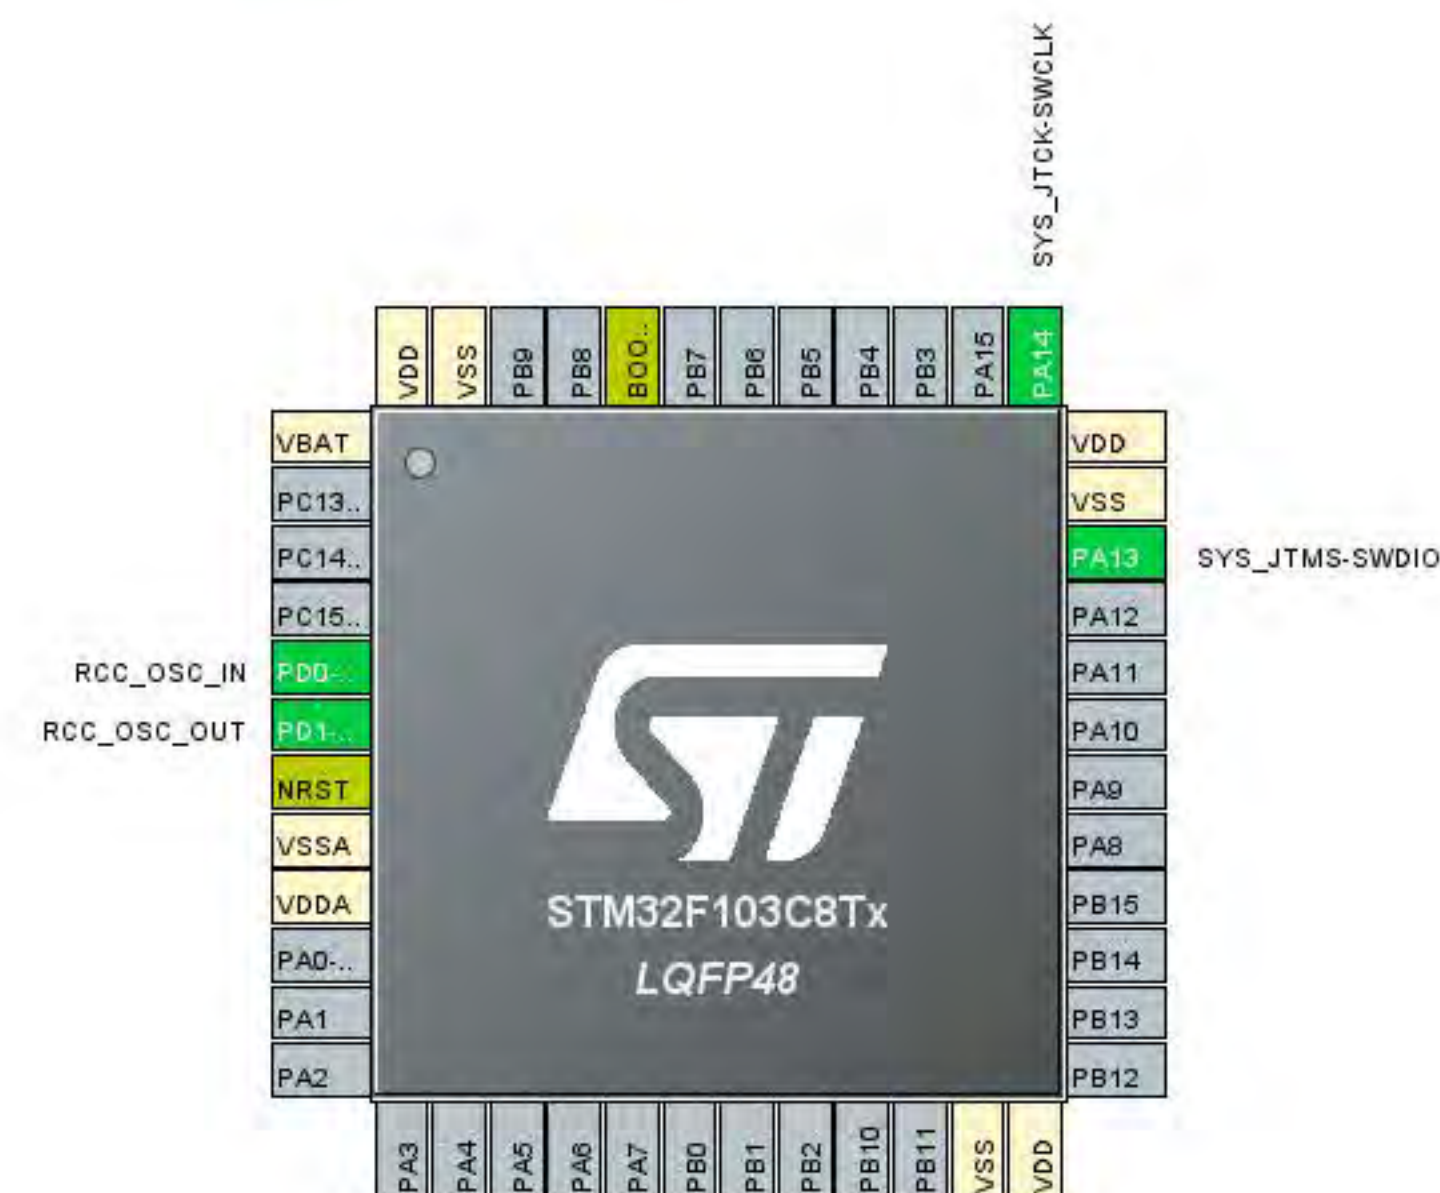

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

I2C2 Mode and Configuration

Mode

I2C

I2C

Configuration

✓ NVIC Settings

✓ DMA Settings

✓ GPIO Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)



Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length ...

7-bit

Dual Address Acknowled...

Disabled

Primary slave address


0

General Call address det...

Disabled

Pinout view

System view

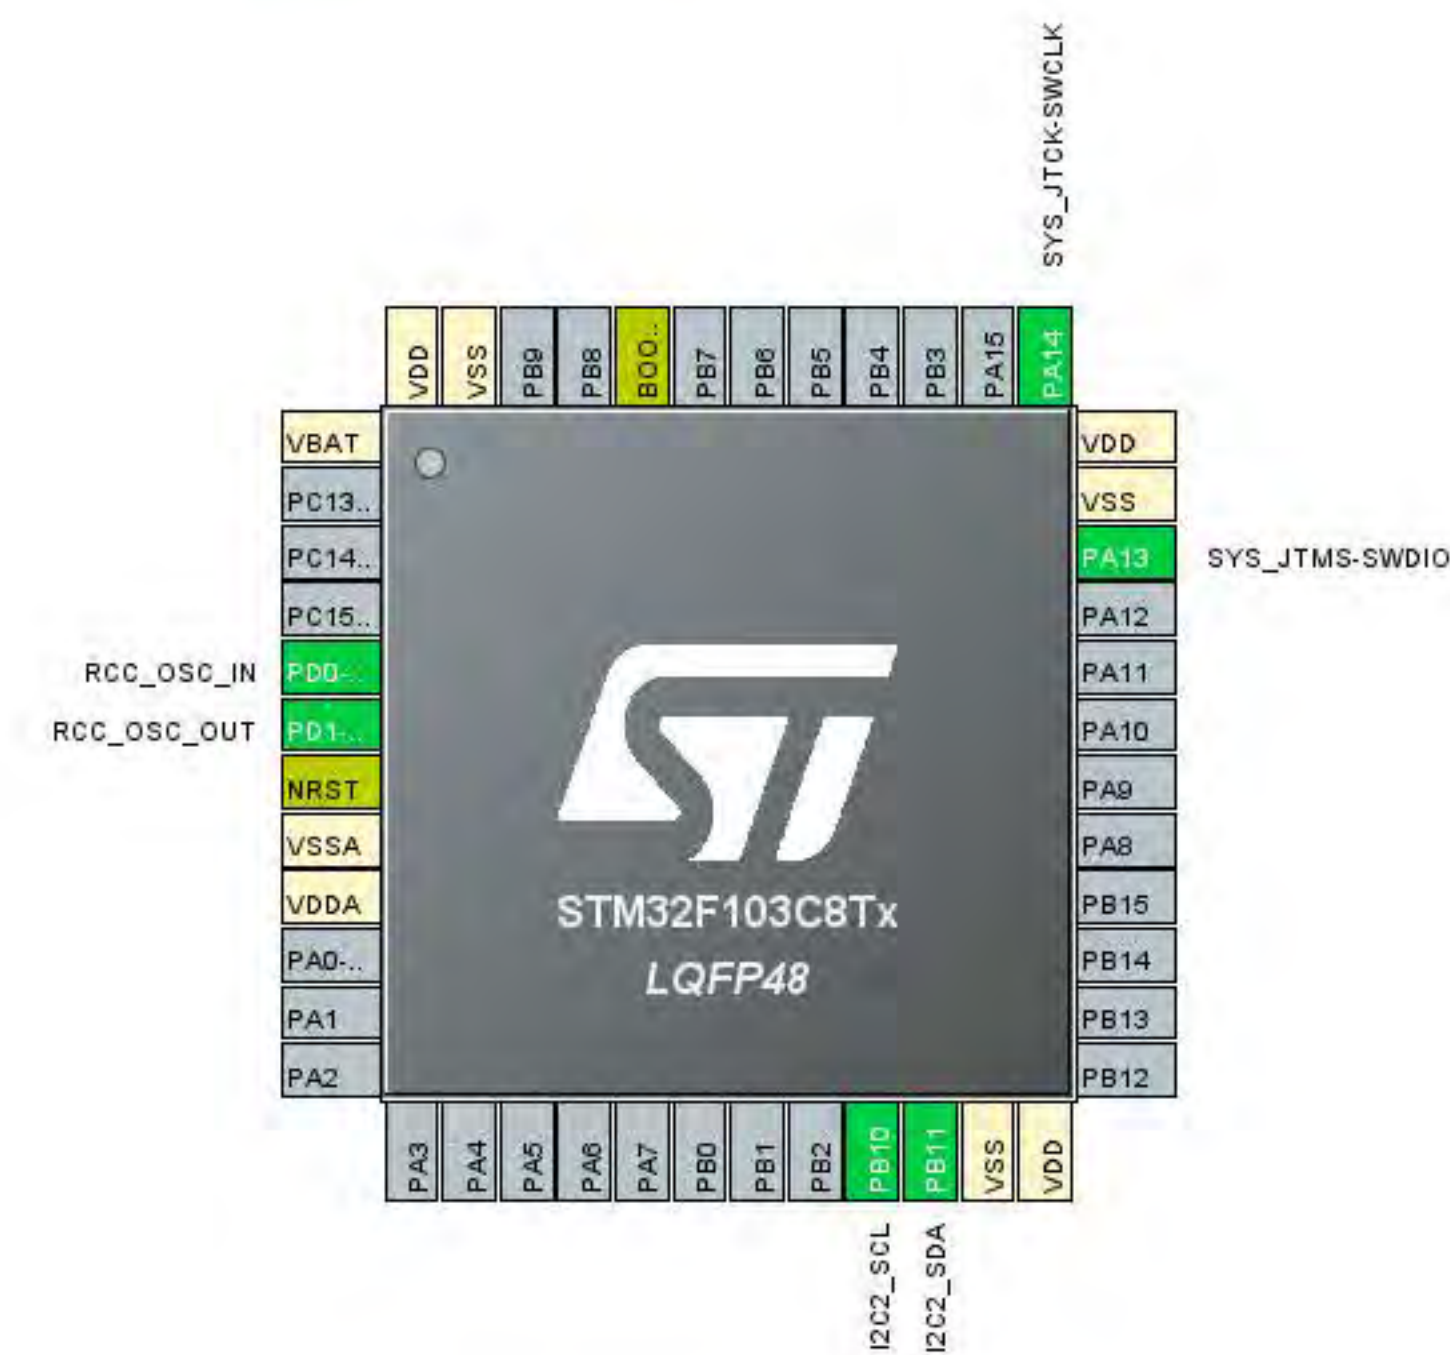

Pinout & Configuration


Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB10	I2C2_S...	n/a	Alterna...	n/a	High		☐
PB11	I2C2_S...	n/a	Alterna...	n/a	High		☐

Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view

System view

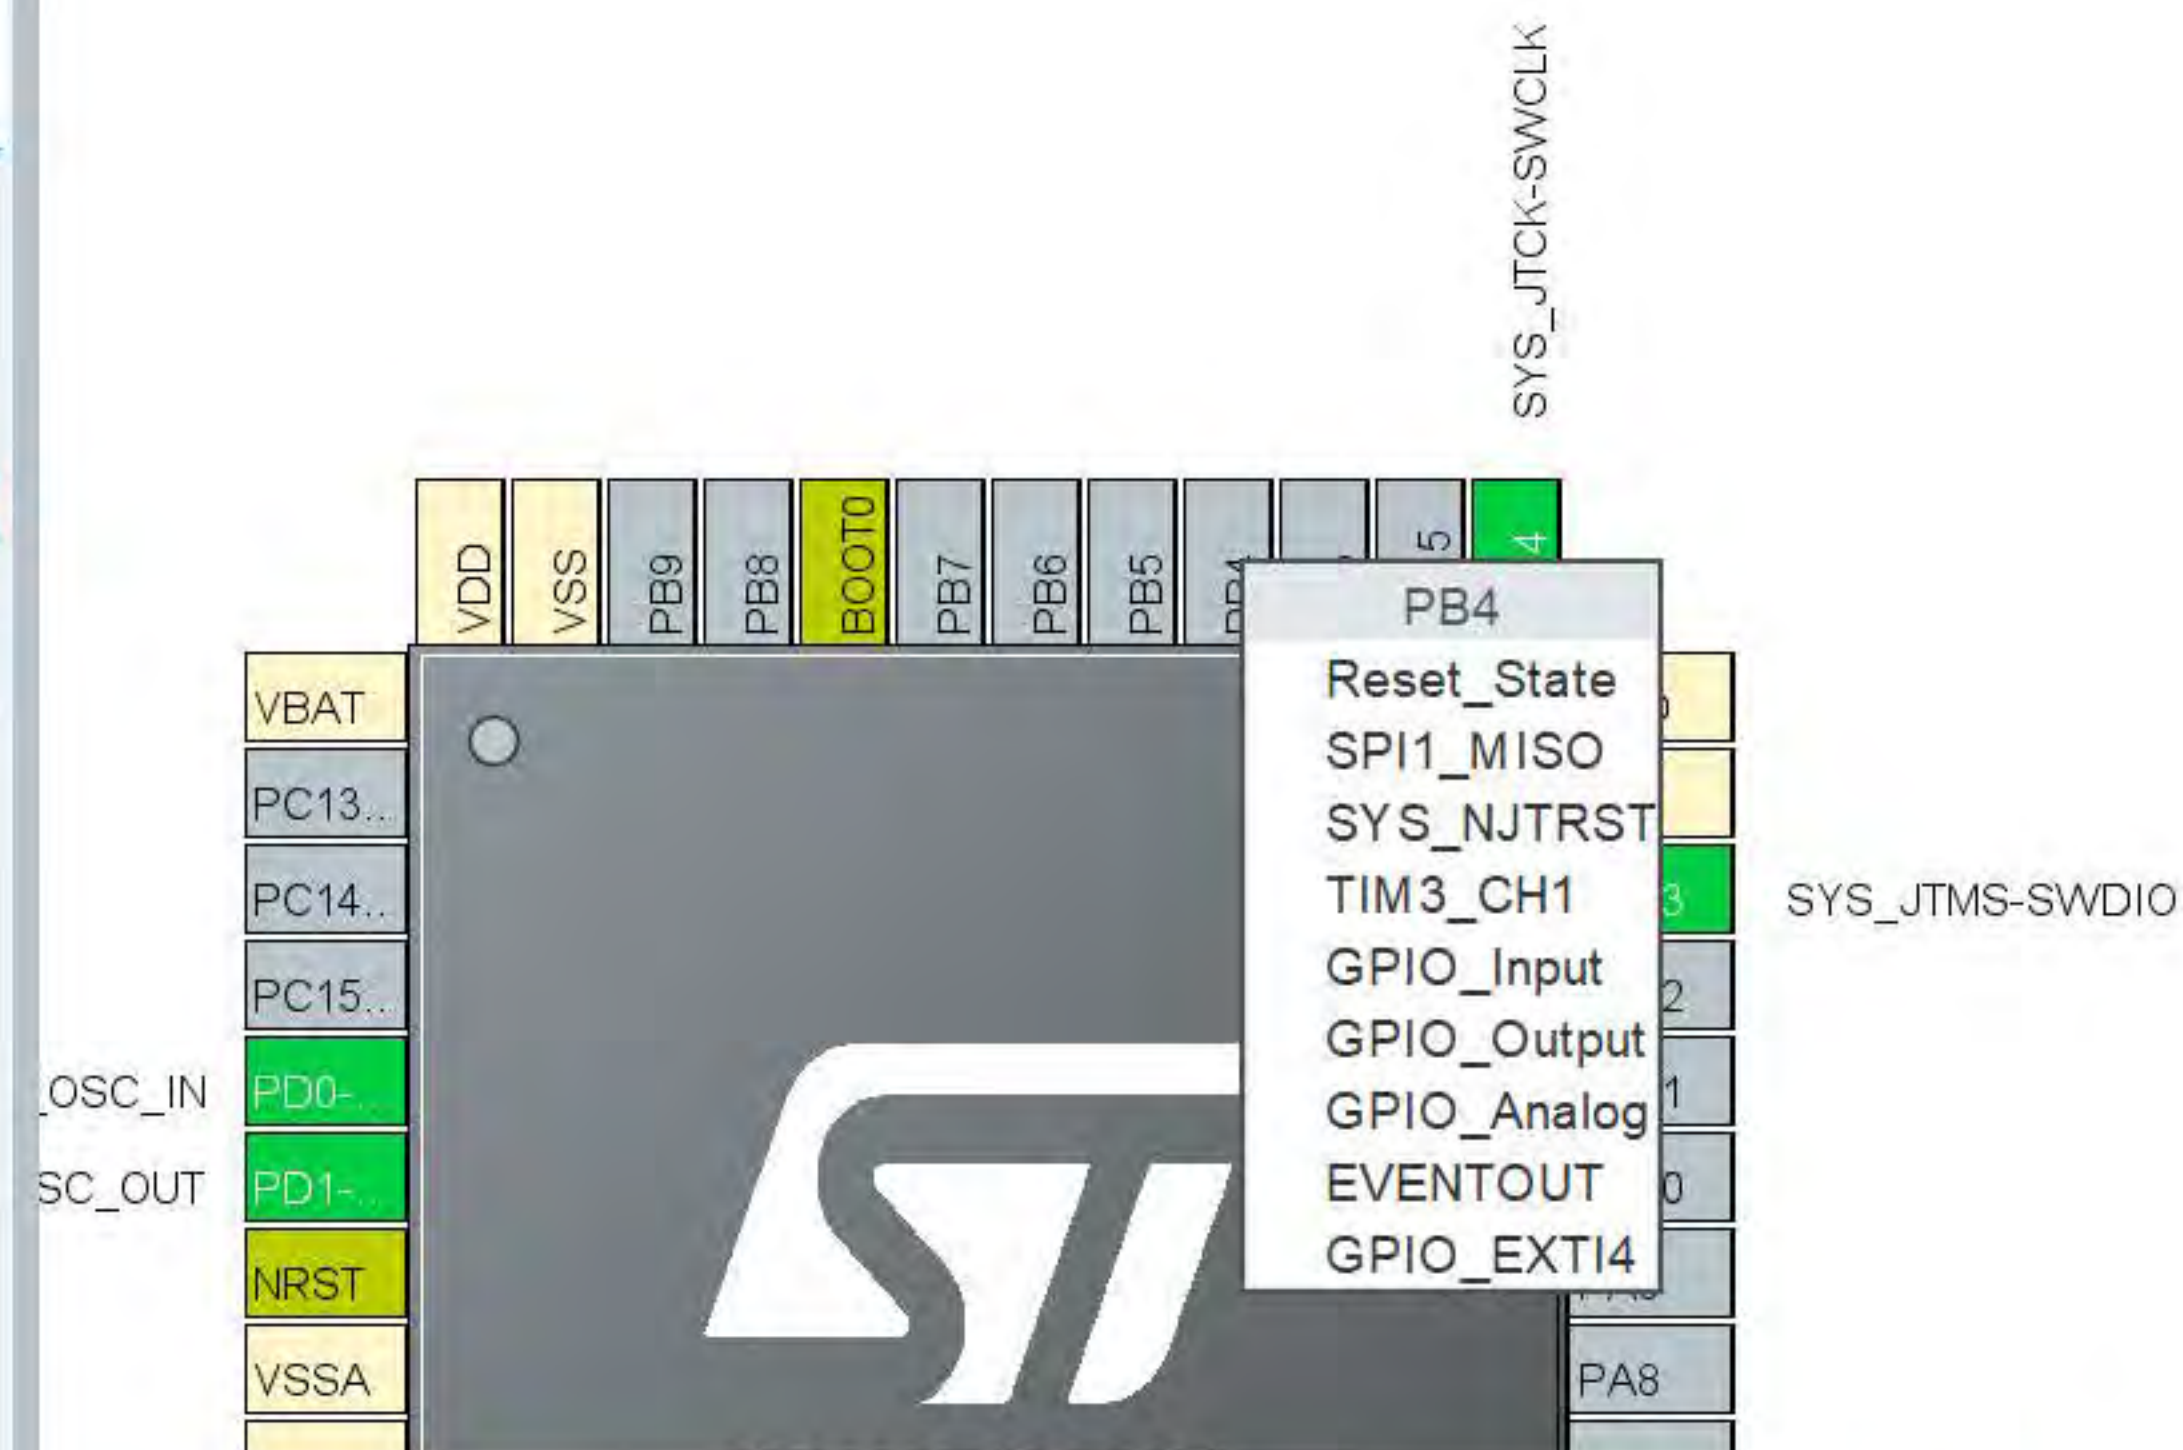

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	No pull...	n/a		☐

Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view

System view

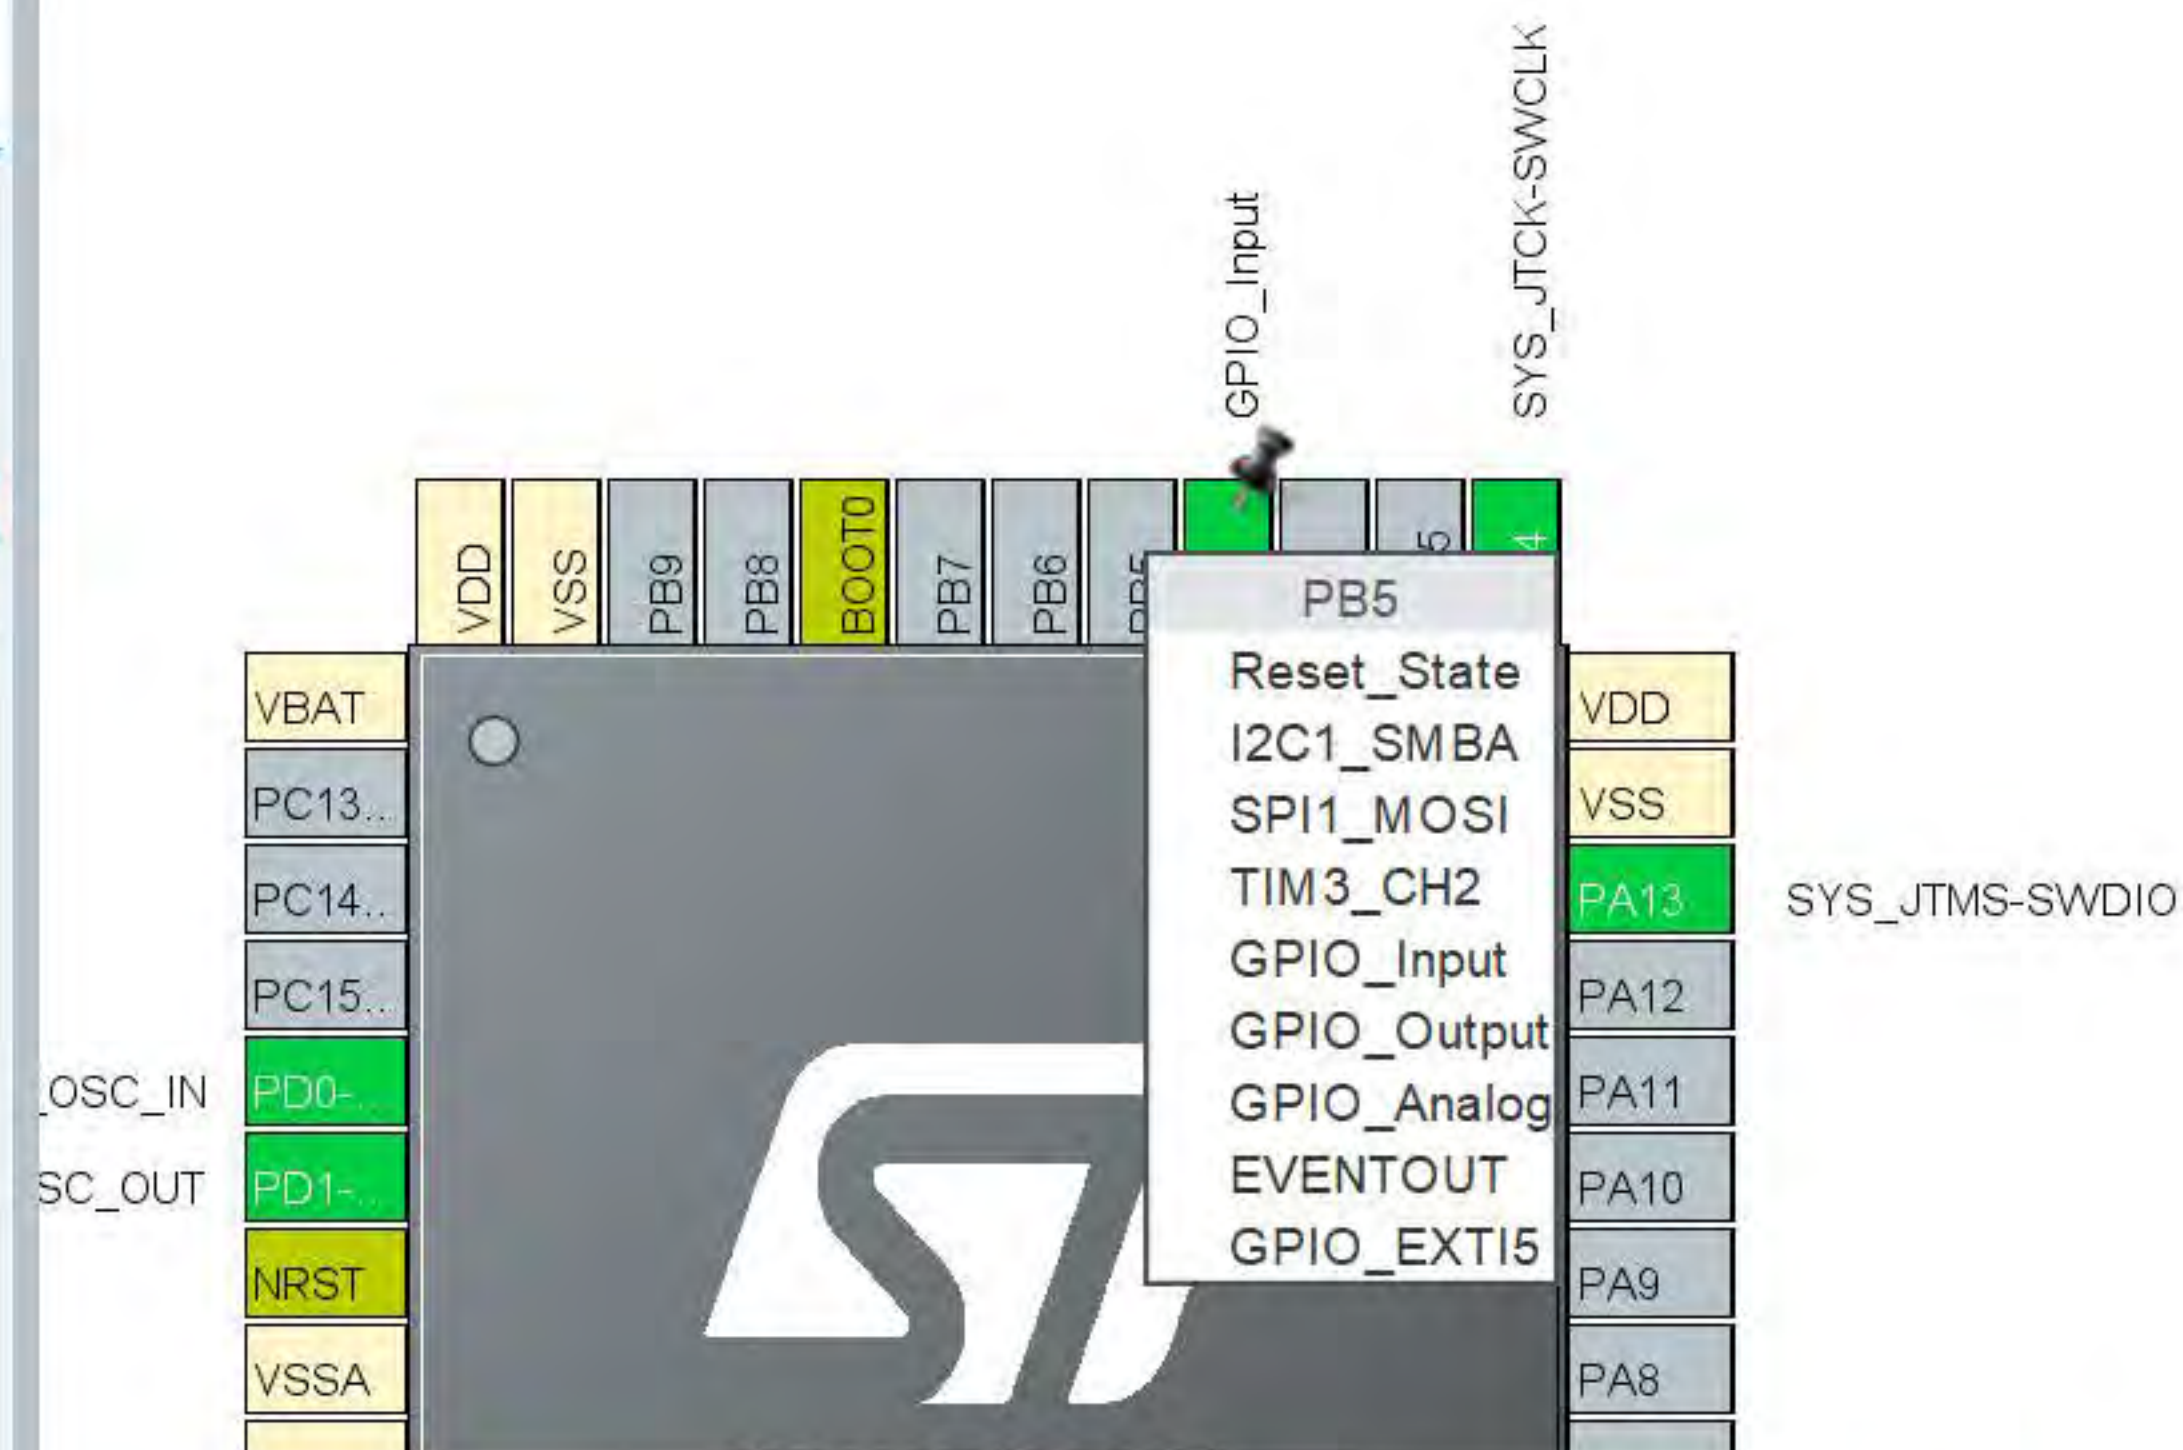

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	No pull...	n/a		☐
PB5	n/a	n/a	Input ...	No pull...	n/a		☐

? Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view

System view

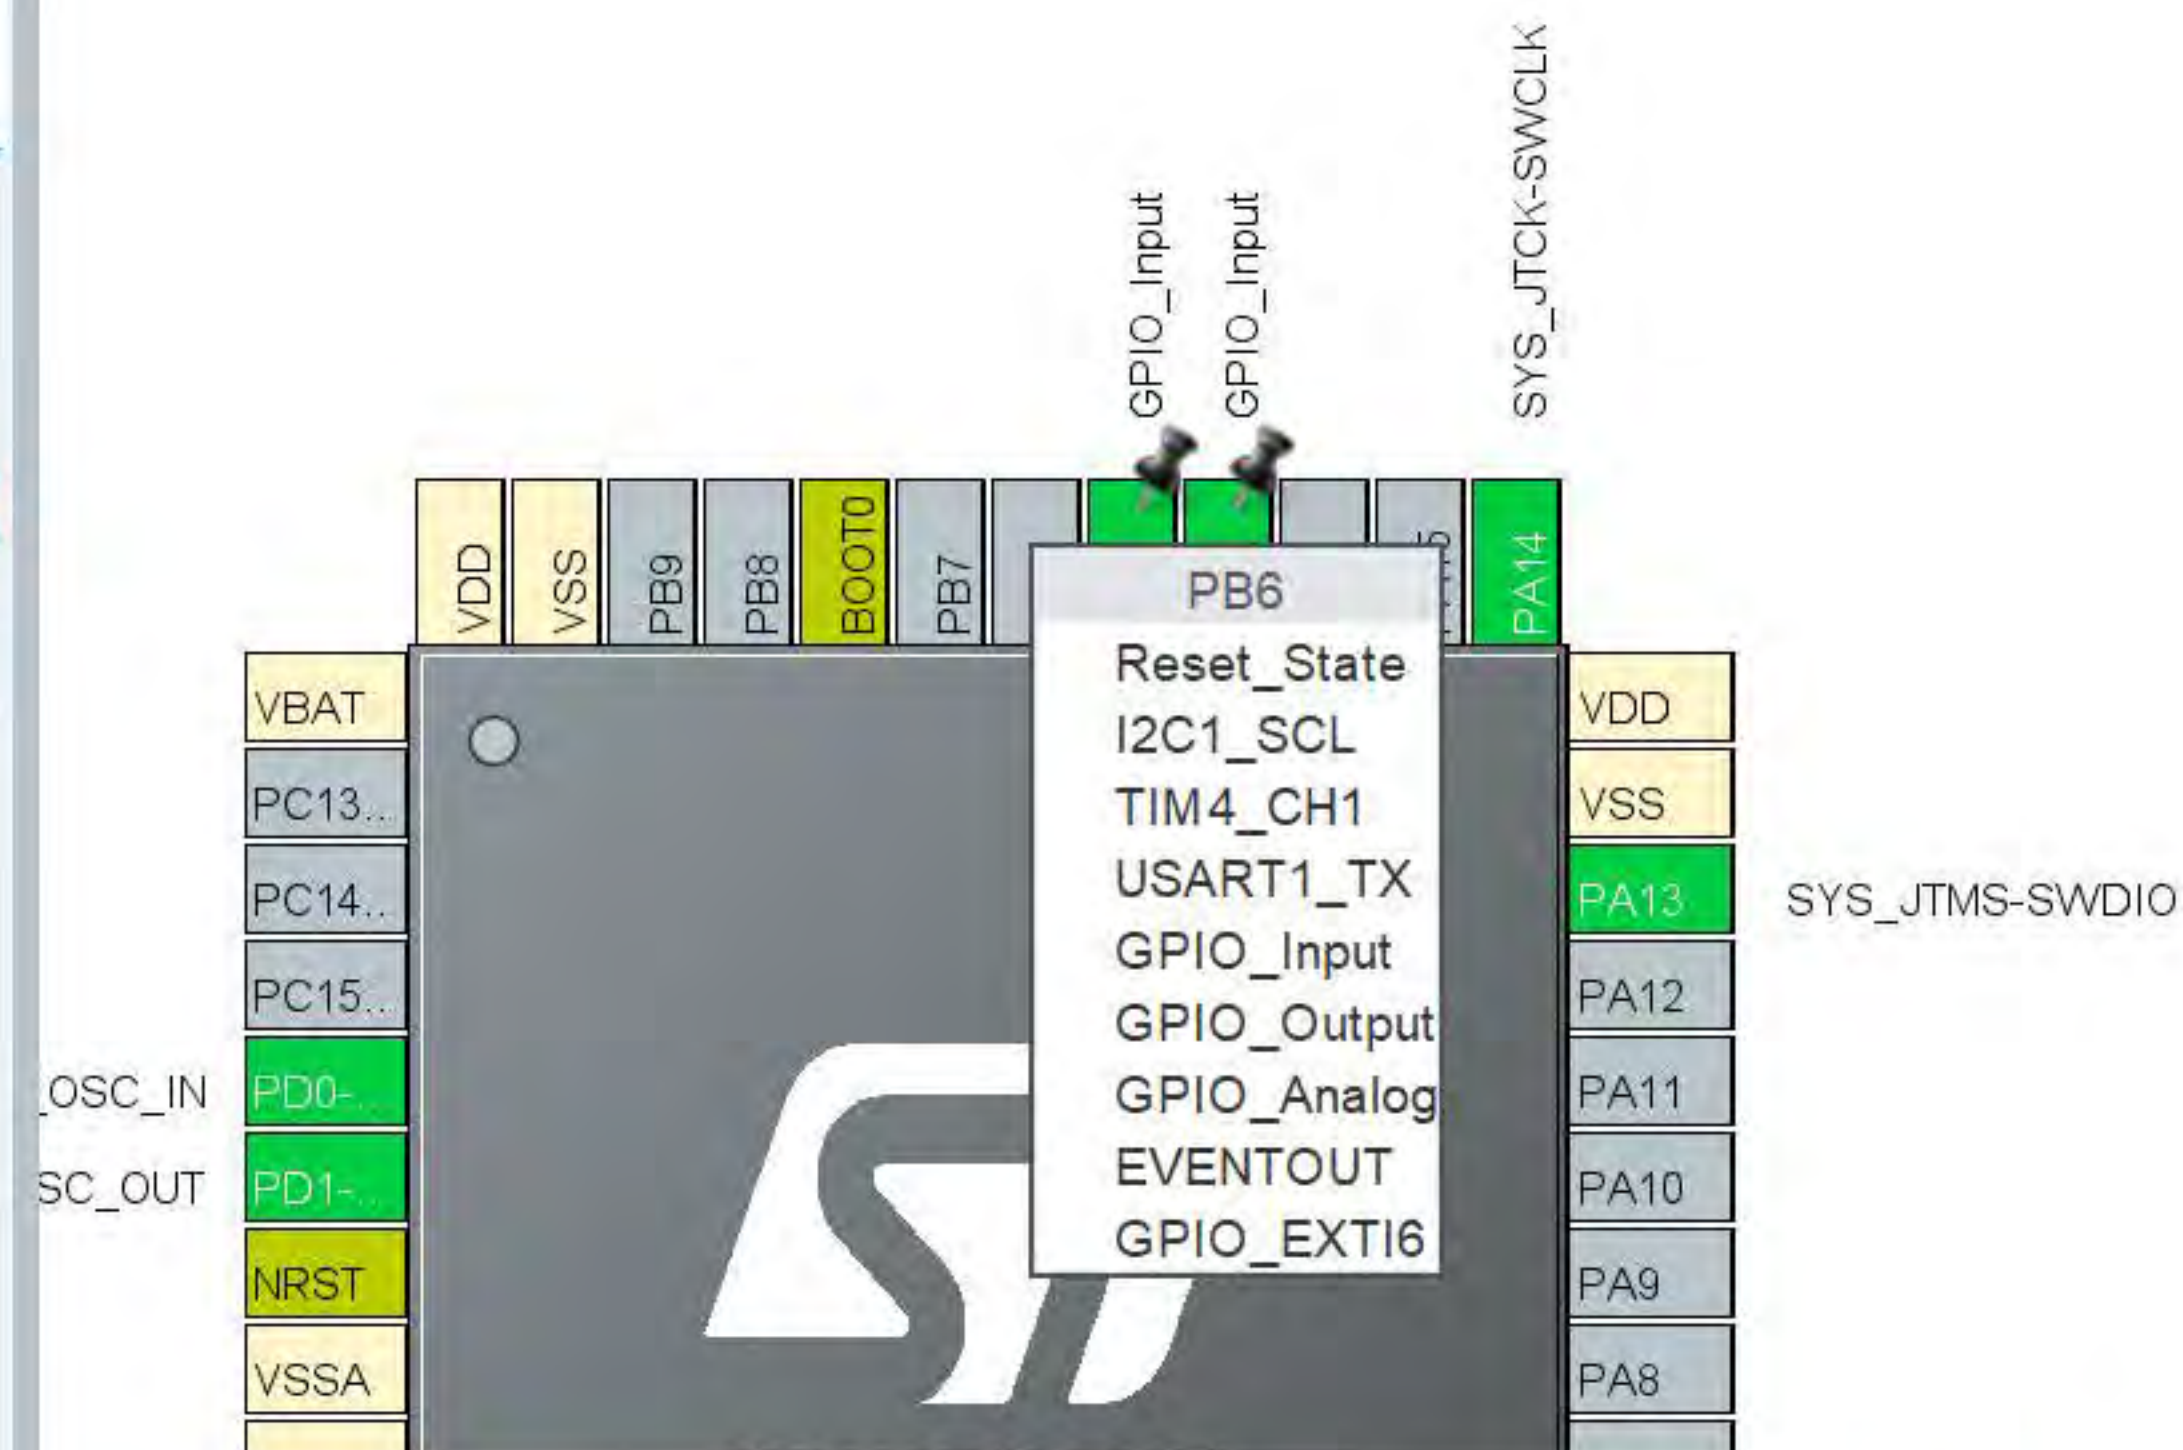

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	No pull...	n/a		☐
PB5	n/a	n/a	Input ...	No pull...	n/a		☐
PB6	n/a	n/a	Input ...	No pull...	n/a		☐
PB7	n/a	Low	Output...	No pull...	Low		☐

? Select Pins from table to configure them. Multiple selection is Allowed.

Pinout view

System view

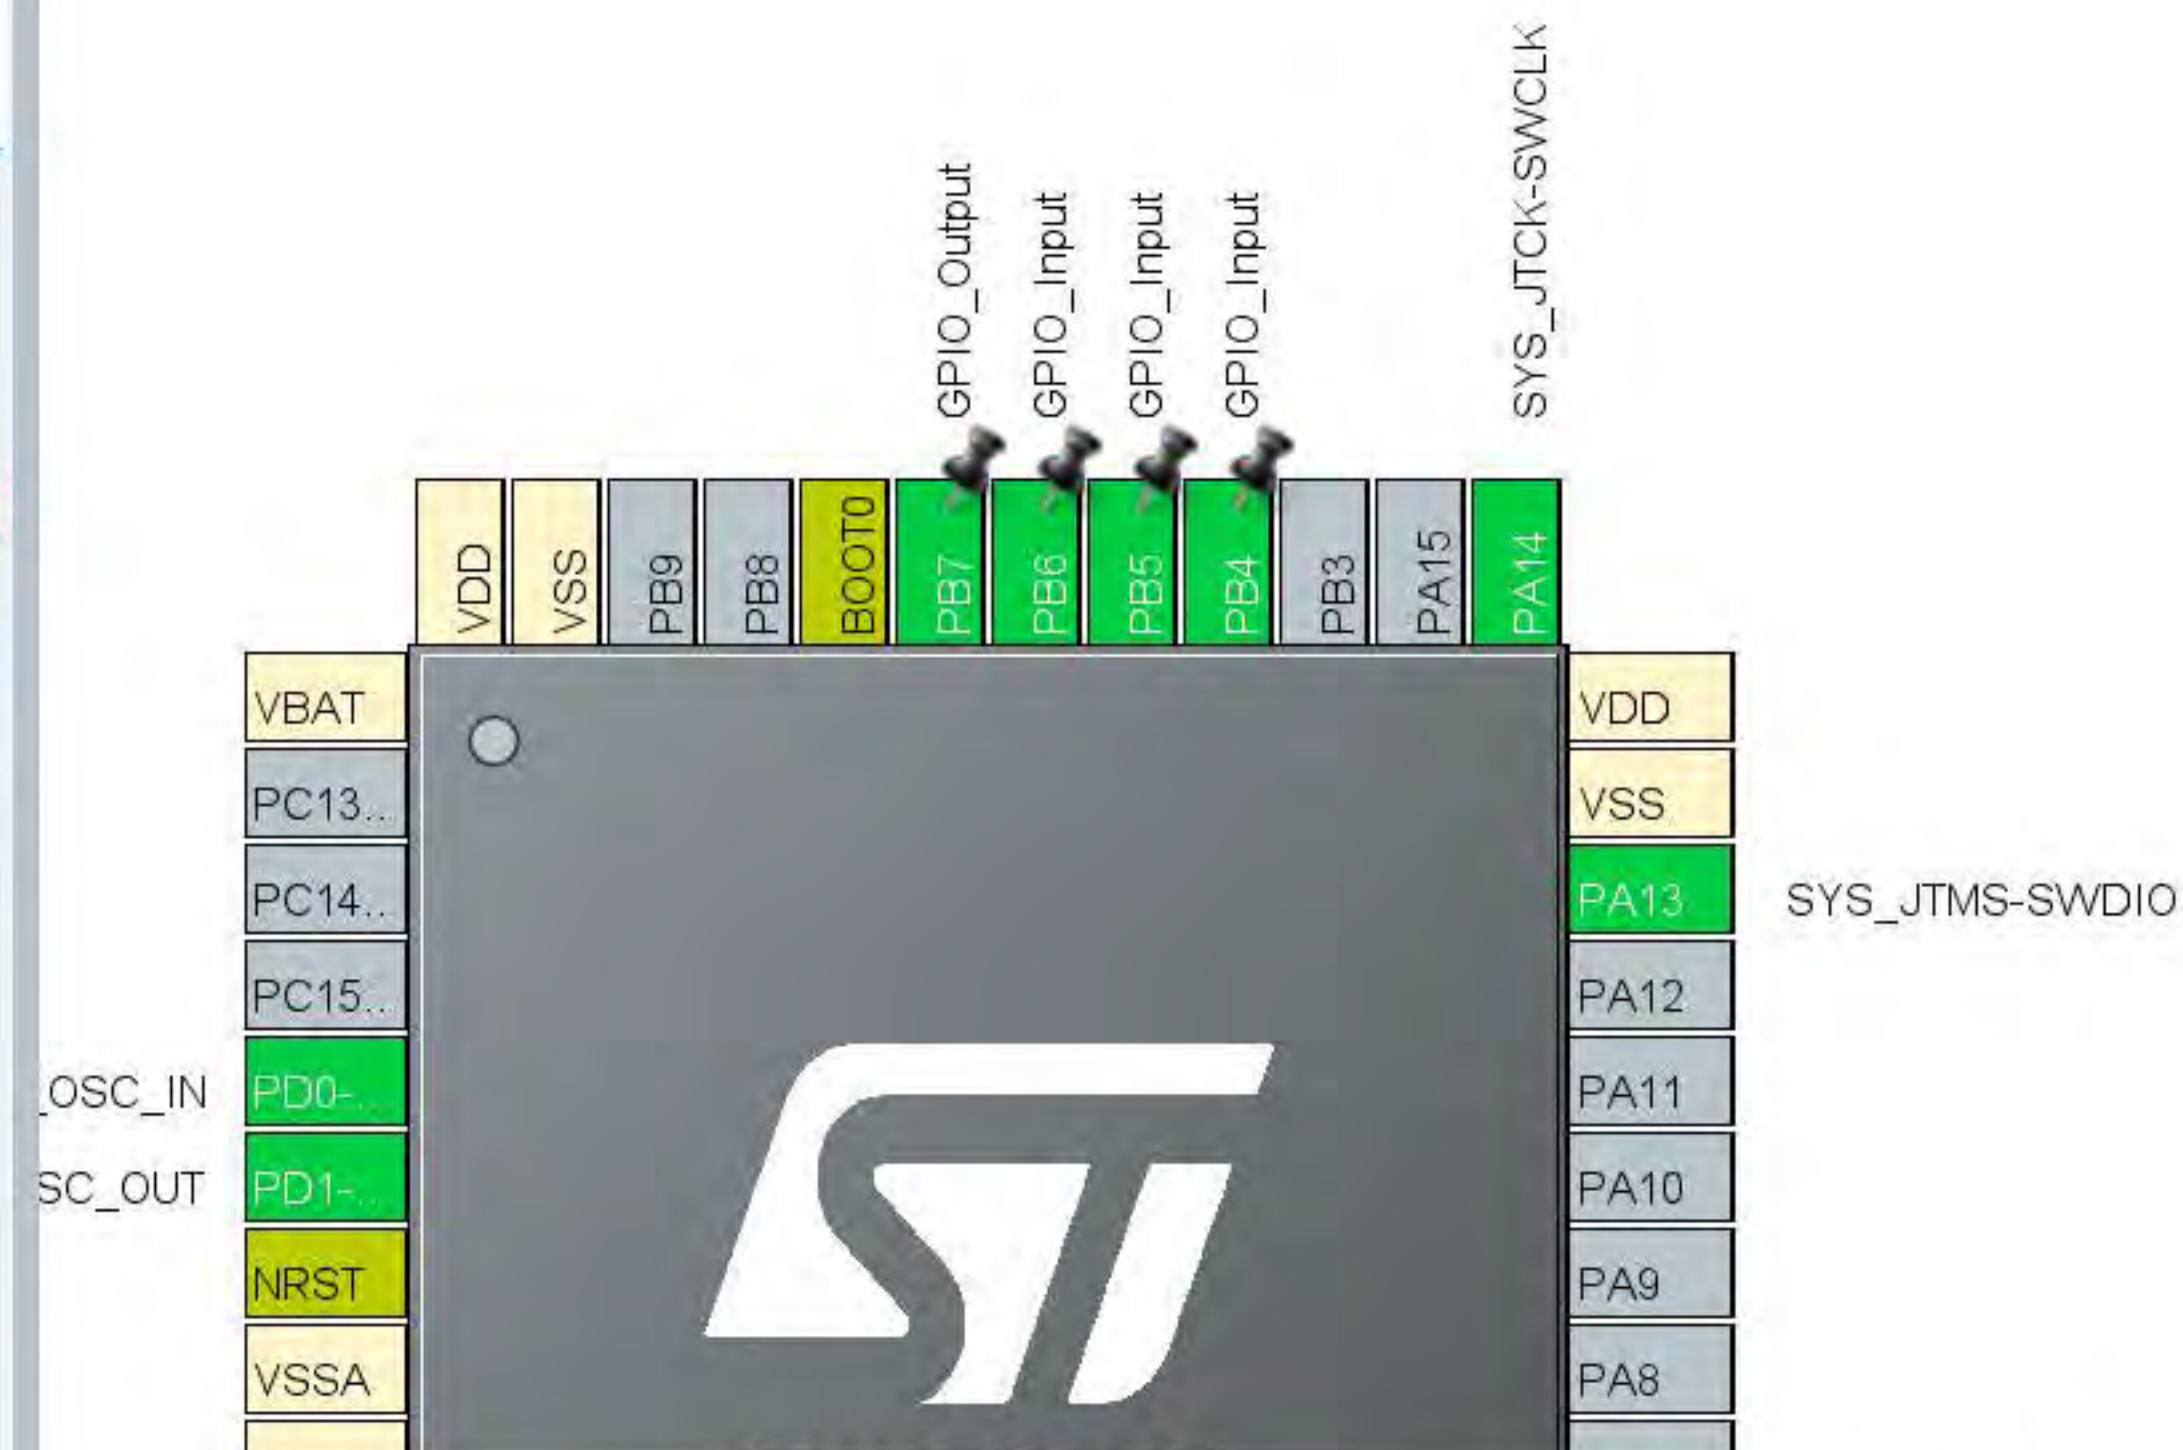

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	Pull-up	n/a		✓
PB5	n/a	n/a	Input ...	No pull...	n/a		☐
PB6	n/a	n/a	Input ...	No pull...	n/a		☐
PB7	n/a	Low	Output...	No pull...	Low		☐

PB4 Configuration :

GPIO mode

Input mode


GPIO Pull-up/Pull-down

Pull-up

User Label

Pinout view

System view

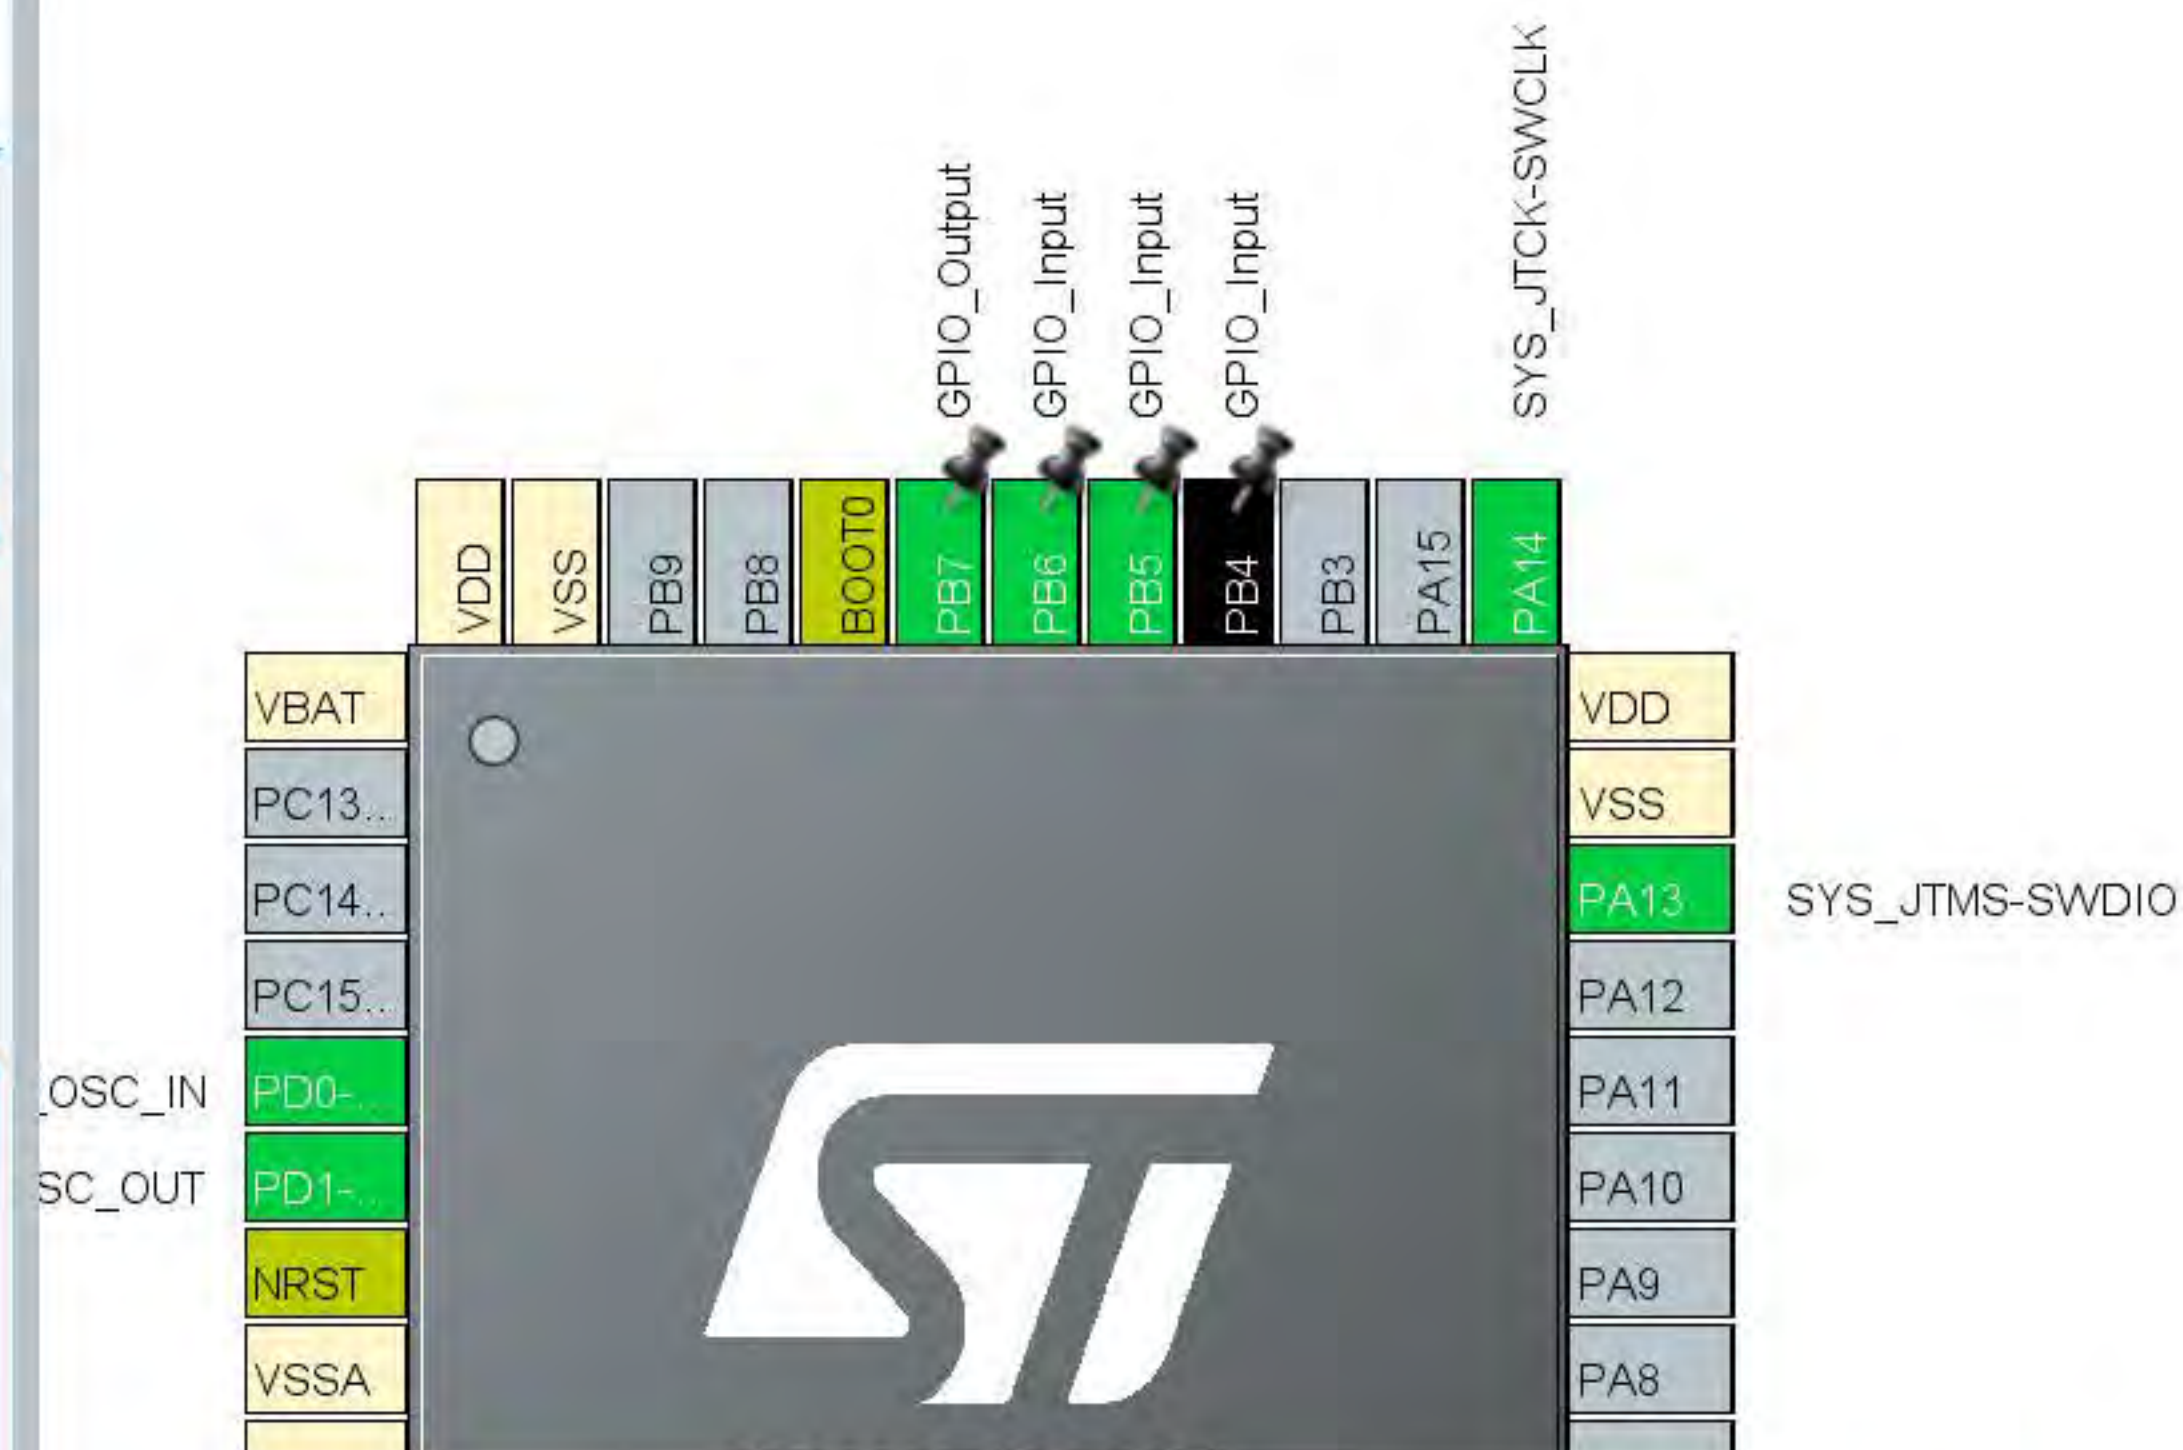

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	Pull-up	n/a		☒
PB5	n/a	n/a	Input ...	No pull...	n/a		☐
PB6	n/a	n/a	Input ...	No pull...	n/a		☐
PB7	n/a	Low	Output...	No pull...	Low		☐

PB5 Configuration :

GPIO mode

Input mode

GPIO Pull-up/Pull-down

No pull-up and no pull-down

No pull-up and no pull-down

User Label


Pull-up

Pull-down

GPIO_PULLUP

Pinout view

System view

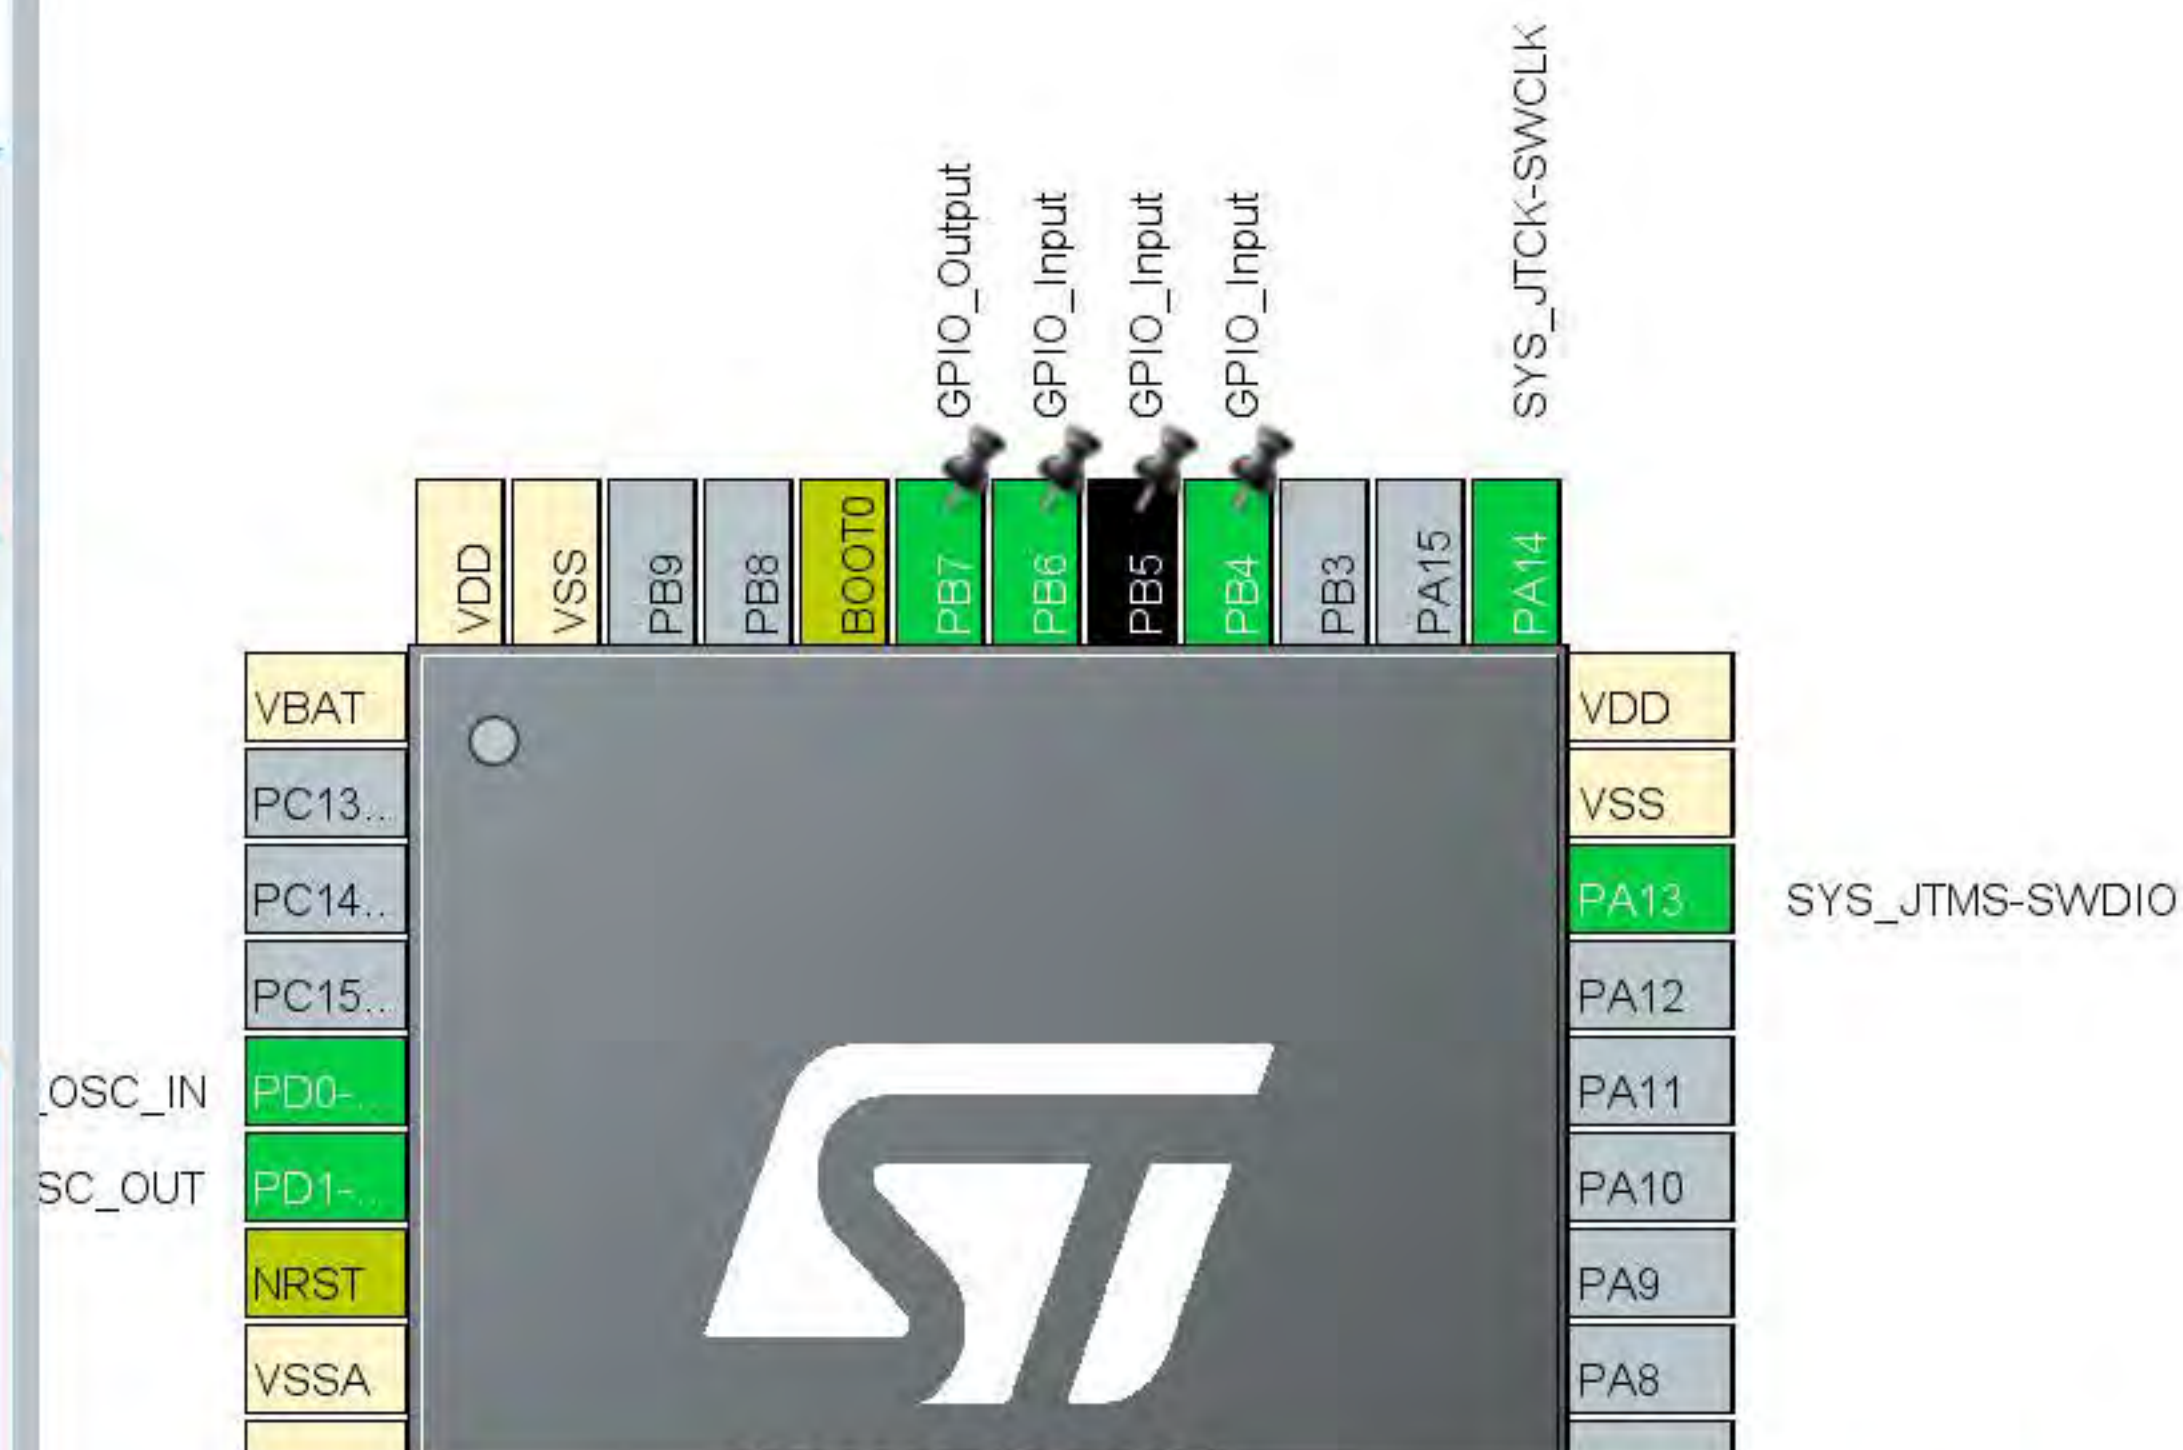

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	Pull-up	n/a		✓
PB5	n/a	n/a	Input ...	Pull-up	n/a		✓
PB6	n/a	n/a	Input ...	No pull...	n/a		
PB7	n/a	Low	Output...	No pull...	Low		

PB6 Configuration :

GPIO mode

Input mode

GPIO Pull-up/Pull-down

No pull-up and no pull-down

No pull-up and no pull-down

User Label


Pull-up

Pull-down

GPIO_PULLUP

Pinout view

System view

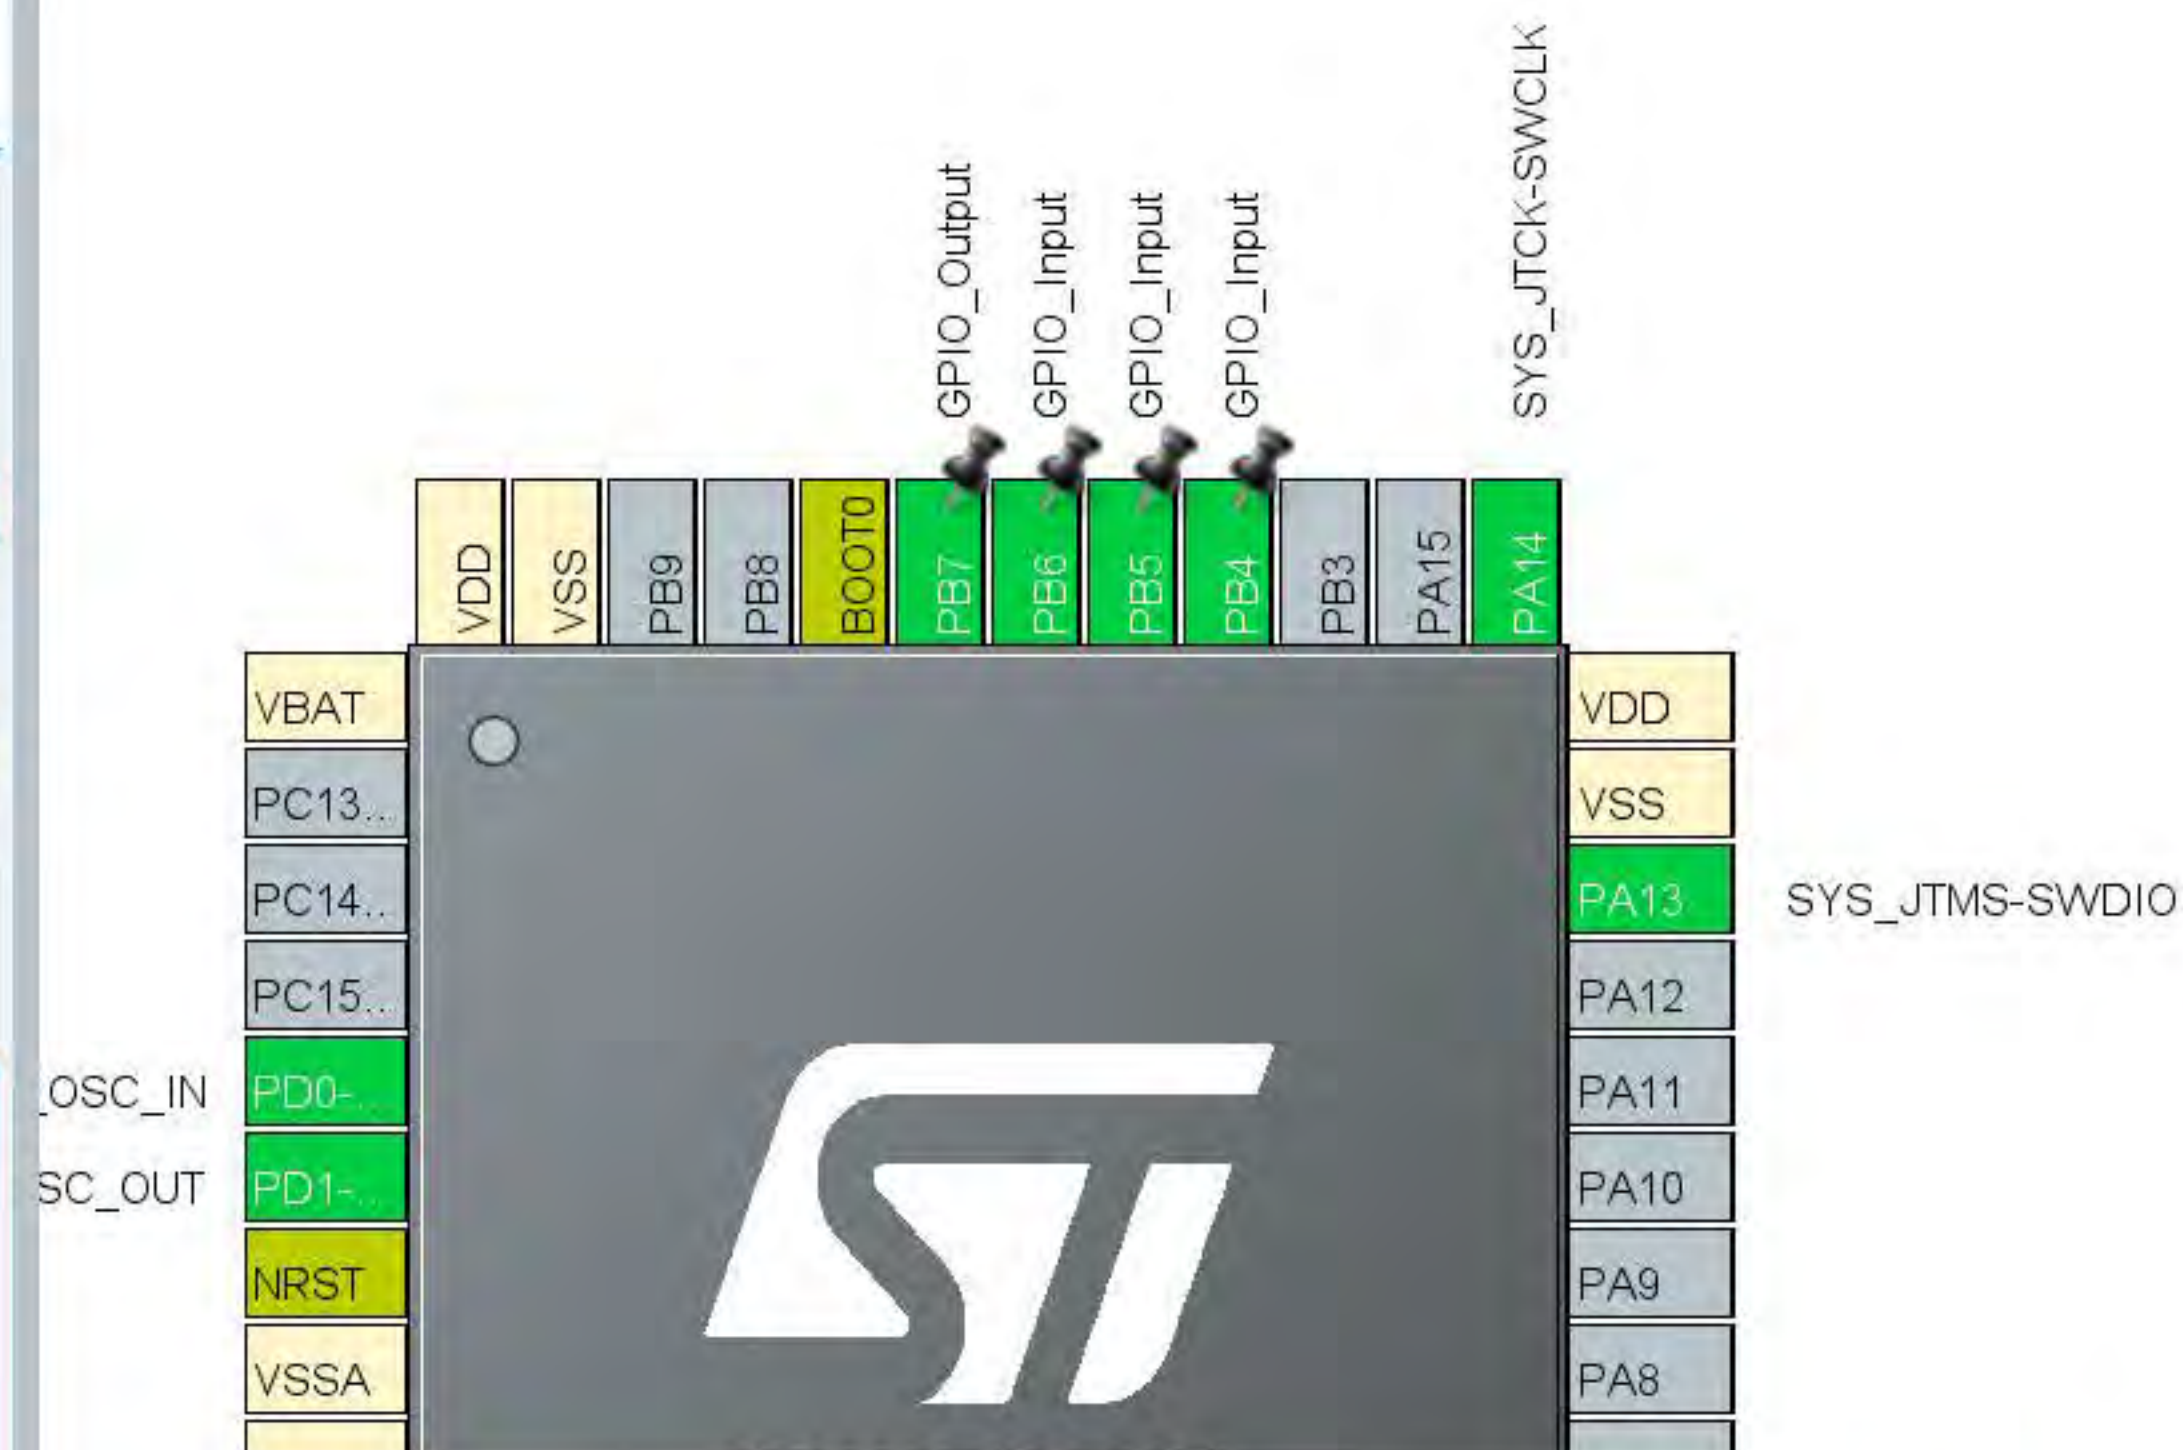

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

⚠ SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

GPIO Mode and Configuration

Configuration

Group By Peripherals

✓ GPIO

✓ I2C

✓ RCC

✓ SYS

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal ...	GPIO ...	GPIO ...	GPIO ...	Maxim...	User L...	Modified
PB4	n/a	n/a	Input ...	Pull-up	n/a		✓
PB5	n/a	n/a	Input ...	Pull-up	n/a		✓
PB6	n/a	n/a	Input ...	Pull-up	n/a		✓
PB7	n/a	Low	Output...	No pull...	Low		☐

PB7 Configuration :

GPIO output level

Low

GPIO mode

Output Push Pull

GPIO Pull-up/Pull-down

No pull-up and no pull-down

Pinout view

System view



Resolve Clock Issues

