

Aerospace series**Nut, anchor, high float**

"When this standard is applied, a careful check must be made as to whether any protective rights exist. This standard issuer hereby disclaims any liability for infringement of patent or design rights resulting from the use of this standard"

**Published and distributed by :
AIRBUS S.A.S.
ENGINEERING DIRECTORATE
31707 BLAGNAC Cedex
FRANCE**

Contents

- 1 Scope
- 2 Normative references
- 3 Requirements
- 4 Designation
- 5 Marking
- 6 Technical specification

1 Scope

This standard specifies the dimensions, tolerances, required characteristics and the mass of an anchor nut with a high float for use in aerospace applications.

2 Normative references

This Airbus Standard incorporates by dated or undated reference provisions from other publications. All normative references cited at the appropriate places in the text are listed hereafter. For dated references, subsequent amendments to or revisions of any these publications apply to this Airbus Standard only when incorporated in it by amendment of revision. For undated references, the latest issue of the publication referred to shall be applied.

EN2424	Aerospace series - Marking of aerospace products.
AMS2410	Plating, Silver, Nickel Strike, High bake. ¹
AMS2700	Chemical passivation treatments for stainless steel parts. ¹
AMS5525	Steel sheet, strip, and plate, corrosion and heat resistant 15Cr - 25.5Ni - 1.2Mo - 2.1Ti - 0.006B-0.30V, 1 800 °F (980 °C) solution heat treated. ¹
AMS5901	Steel, Corrosion Resistant, Sheet, Strip and Plate 18Cr – 8Ni (SAE 30301) Solution Heat Treated. ¹
AMS-QQ-P-416	Plating, cadmium (electrodeposited). ¹
AS5272	Procurement specification - Lubricant, solid film, heat cured, corrosion inhibiting. ¹
AS8879	Screw threads - UNJ profile inch. ¹
NASM25027	Nut, self-locking, 250 °F, 450 °F and 800 °F. ²
TR3791	Materials for self-locking nuts, threaded inserts and screw thread inserts of temperature classes < 425°C

3 Requirements

3.1 Configuration, dimensions, tolerances and mass

The configuration, dimensions, tolerances and mass shall be in accordance with figure 1 and table 1.

¹ Published by: Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001, USA

² Published by: Aerospace Industries Association of America, Inc. (AIA), 1250 Eye Street, N.W., Washington, D.C. 20005-3924; USA

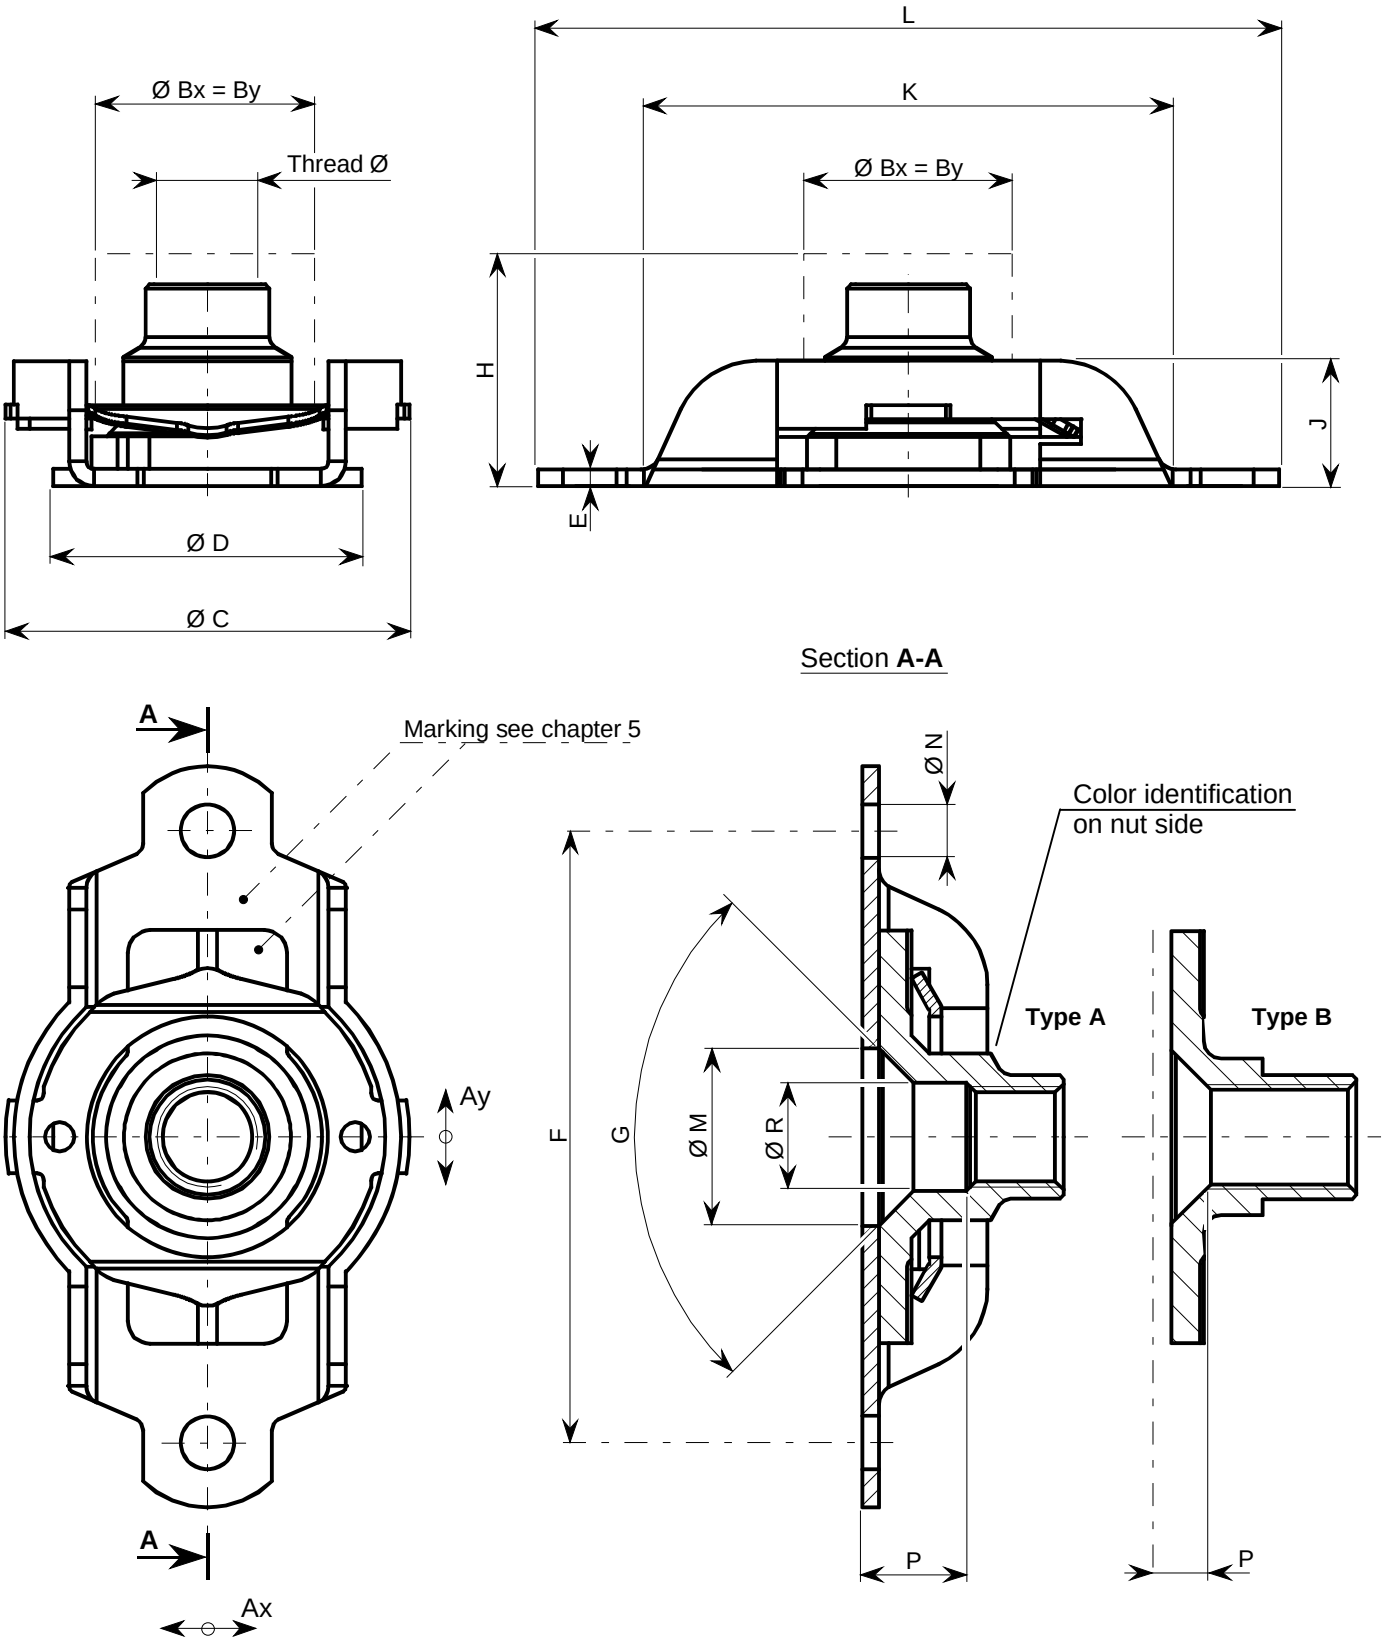


Figure 1: Configuration

Table 1: Dimensions, tolerances, mass and identification

Dimensions in millimeter.

Dash code No.	Nut form	Thread as per AS8879 class 3B	+/- Ax=Ay min. ¹⁾	Bx=By max. ²⁾	Ø C max.	Ø D max.	E max.	F ± 0,05	G Ref.
3-1	Type B	.1900-32-UNJF	1,6	9,8	19,5	15	1	28,5	120
3-2	Type A								90
3-3	Type A								
3-4	Type A								
3-5	Type A								
3-6	Type A								

(continued)

Table 1: Dimensions, tolerances, mass and identification : (concluded)

Dimensions in millimeter.

Dash code No.	H Max.	J Max.	K Max.	L Max.	Ø M ± 0,10	Ø N +0,12 0	P min.	Ø R Ref.	Mass (g) ± 10 %	Identification on nut ³⁾
3-1	7,2	6,4	25,2	34,8	8,2	2,48	1,77	5,0	5,6	None
3-2	8,7						3,17		5,9	Blue
3-3	10,4						4,77		6,2	Purple
3-4	12						6,35		6,6	Yellow
3-5	13,45						7,95		6,9	Green
3-6	15,05						9,52		7,3	Black

1) Radial floating.

2) Overall dimensions of nut shank, including floating.

3) Identification has to be visible to the naked eye

3.2 Material and surface treatment

The material and surface treatment shall be in accordance with table 2.

Table 2: Material and surface treatment

Element	Material code	Material	Surface treatment	Lubricating
Nut	C	CRES as per AMS5525 or equivalent (Z6NCT25 according TR3791)	Passivated as per AMS2700 type 6	Silver plated as per AMS2410
Cage		CRES as per AMS5525 or equivalent (Z6NCT25 according TR3791)	Passivated as per AMS2700 type 6	-
Clip		CRES as per AMS5901 or equivalent (Z10CNT18-10 according TR3791)	Passivated as per AMS2700 type 6	-

3.3 General characteristics

3.3.1 Operating temperatures


-45 °C to +235 °C.

3.3.2 Class of resistance

130 KSI (900 MPa).

4 Designation

This type of Standard shall be designated according to the philosophy of the following example:

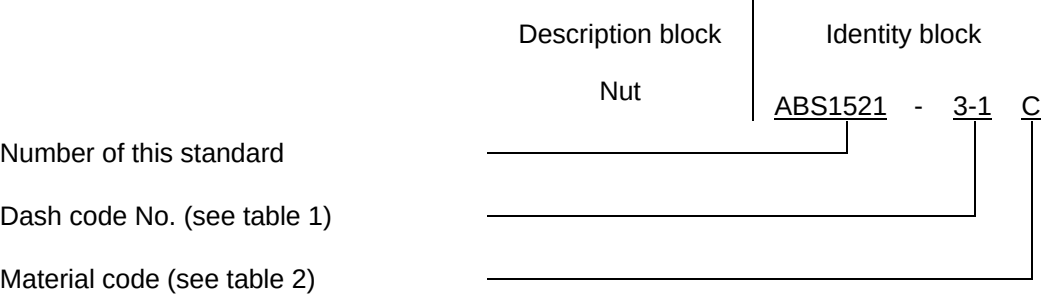

5 Marking

EN2424, style P.

6 Technical specification

NASM25027.

RECORD OF REVISIONS

Issue	Clause modified	Description of modification
1 08/05		New Standard.
2 07/06		Reference modified in § 2 and table 2: AMS-QQ-P-35 changed to AMS2700. Dimensions G modified for Dash code No. 3-1: 90° changed to 120°. Dimensions P modified for Dash code No. 3-1: 2,60 mm changed to 1,77 mm. Template updated.
3 09/07	Table 1	Marking change from style P to style A Dimension H modified for Dash code No. 3-2 and 3-3 Addition of size 3–4C to 3–6C Addition of color identification
	Table 2	Equivalent TR3791 material added.