



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



FED. SUPPLY CLASS
5310

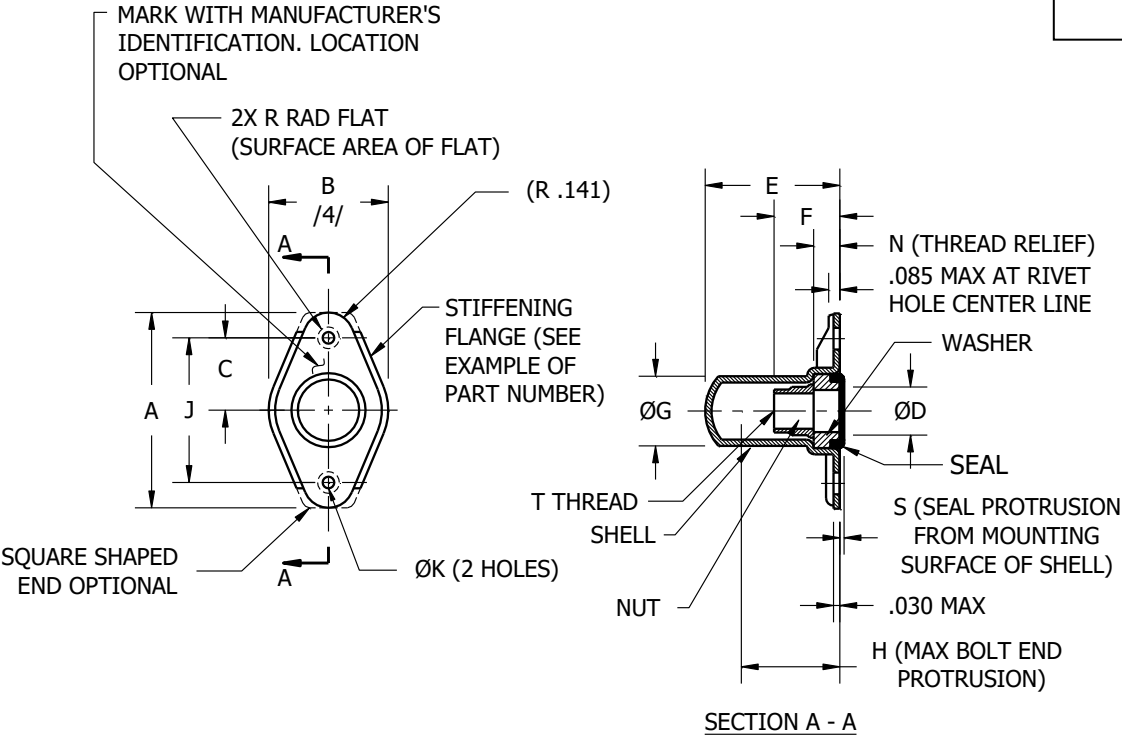


TABLE I – DASH NUMBERS AND DIMENSIONS

T THREAD	DASH NO.	A MAX	B MAX	C ±.005	ØD MIN	E MAX	F MAX	ØG MAX	H BOLT END MAX	J ±.002	ØK +.005 -.000	N MIN	R RAD MIN	S MAX	WEIGHT/100 LBS MAX	
															STEEL	CRES
.1640-32 UNJC-3B	08	.989	.568	.344	.229	.640	.313	.352	.568	.688	.098	.125	.098	.020	.92	1.00
.1900-32 UNJF-3B	3	.989	.568	.344	.229	.640	.313	.352	.568	.688	.098	.125	.098	.020	.92	1.00
.2500-28 UNJF-3B	4	1.296	.668	.500	.289	.755	.372	.419	.687	1.000	.098	.135	.098	.020	1.40	1.65
.3125-24 UNJF-3B	5	1.296	.762	.500	.351	.823	.410	.520	.728	1.000	.130	.135	.130	.025	1.95	2.25

THIRD ANGLE PROJECTION 	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE		REVISION 13
	TITLE NUT, SELF-LOCKING, PLATE, TWO LUG, CAP, FLOATING		CLASSIFICATION PART STANDARD
	PROCUREMENT SPECIFICATION NASM25027 EXCEPT AS NOTED		NAS1473 SHEET 1 OF 6

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE ACCURACY OF THE INFORMATION CONTAINED HEREIN. AIA IS NOT RESPONSIBLE FOR ANY ERRORS OR OMISSIONS. AIA IS NOT RESPONSIBLE FOR ANY REPRODUCTION OR DISTRIBUTION OF THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF AIA. AIA IS NOT RESPONSIBLE FOR ANY REPRODUCTION OR DISTRIBUTION OF THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF AIA. AIA IS NOT RESPONSIBLE FOR ANY REPRODUCTION OR DISTRIBUTION OF THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF AIA.

AIRBUS | NormMaster

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

REVISION DATE: APRIL 30, 2025

ISSUE DATE: JUNE 1960



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



MATERIAL:

- NUT: STEEL PER PROCUREMENT SPECIFICATION.
NONMAGNETIC A286 CRES (UNS S66286) PER AMS5525 OR AMS5732.
- SHELL: STEEL PER PROCUREMENT SPECIFICATION.
NONMAGNETIC A286 CRES (UNS S66286) PER AMS5525.
- WASHER: ALUMINUM ALLOY OR STEEL PER PROCUREMENT SPECIFICATION.
NONMAGNETIC A286 CRES (UNS S66286) PER AMS5525 OR AMS5732.
- SEAL: 225 °F: RUBBER PER MIL-PRF-6855, CLASS 1, GRADE 60, DUROMETER A60, COLOR BLACK.
350 °F: FLUROSILICONE RUBBER PER MIL-DTL-25988, TYPE II, CLASS 1, DUROMETER A70, COLOR BLUE.
450 °F: SILICONE RUBBER PER AMS3304, DUROMETER A70, COLOR RED.

FINISH:

- STEEL NUT, STEEL SHELL, AND STEEL WASHER:
CADIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 (NO FINISH CODE).
ZINC-NICKEL PLATE IN ACCORDANCE WITH SAE AMS2461, TYPE II, CLASS 2, GRADE B.
THE RECOMMENDED COLOR IS LIGHT TO DARK GRAY, BUT COLOR SHALL NOT BE A CAUSE FOR REJECTION (CODE E).

- CRES NUT:
CLEAN AND PASSIVATE PER MIL-DTL-5002 (MATERIAL CODES F, G, AND R WITH NO PASSIVATION CODE).
~~PASSIVATION IN ACCORDANCE WITH AMS2700 METHOD 2 — NO POST TREATMENT (CODE B).~~
PASSIVATION IN ACCORDANCE WITH AMS2700 METHOD 1, TYPE 8, CLASS 1, NO POST TREATMENT (MATERIAL CODES F, G, AND R WITH PASSIVATION CODE M).
PASSIVATION PER AMS2700, METHOD 1, TYPE 6, TYPE 7, OR TYPE 8, NO POST TREATMENT OR METHOD 2 NO POST TREATMENT (MATERIAL CODES F, G, AND R WITH PASSIVATION CODE W).
SILVER PLATE PER NASM25027 TO A MINIMUM THICKNESS ON SURFACES WHICH CAN BE TOUCHED BY A SØ.7500 (3/4 INCH) BALL. THREADS SHALL SHOW COMPLETE COVERAGE BUT THICKNESS REQUIREMENT ON THREADS IS WAIVED (MATERIAL CODE C)

- CRES SHELL:
CLEAN AND PASSIVATE PER MIL-DTL-5002 (NO FINISH CODE AND NO PASSIVATION CODE).
~~PASSIVATION IN ACCORDANCE WITH AMS2700 METHOD 2 — NO POST TREATMENT (CODE B).~~
PASSIVATION IN ACCORDANCE WITH AMS2700 METHOD 1, TYPE 8, CLASS 1, NO POST TREATMENT (NO FINISH CODE AND PASSIVATION CODE M).
PASSIVATION PER AMS2700, METHOD 1, TYPE 6, TYPE 7, OR TYPE 8, NO POST TREATMENT OR METHOD 2 NO POST TREATMENT (NO FINISH CODE AND PASSIVATION CODE W).
ALUMINUM PIGMENT COATED PER NAS4006, CLASS NC, 400° F (CODE D)
ZINC-NICKEL PLATE IN ACCORDANCE WITH SAE AMS2461, TYPE II, CLASS 2, GRADE B.
THE RECOMMENDED COLOR IS LIGHT TO DARK GRAY, BUT COLOR SHALL NOT BE A CAUSE FOR REJECTION (CODE E).

- CRES WASHER:
CLEAN AND PASSIVATE PER MIL-DTL-5002 (NO PASSIVATION CODE).
PASSIVATION IN ACCORDANCE WITH AMS2700 METHOD 1, TYPE 8, CLASS 1, NO POST TREATMENT (PASSIVATION CODE M).
PASSIVATION PER AMS2700, METHOD 1, TYPE 6, TYPE 7, OR TYPE 8, NO POST TREATMENT OR METHOD 2 NO POST TREATMENT (PASSIVATION CODE W).

- ALUMINUM ALLOY WASHER:
ANODIZE OR CHEMICAL FILM PER NASM25027, EXCEPT ANODIZE SHALL BE LIMITED TO TYPE I OR TYPE II.

REVISION

13

NAS1473

SHEET 2

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THEREOF OF PATENT OR TRADEMARK RIGHTS.

Copyright Aerospace Industries Association of America, Inc. 2025. All Rights Reserved. Not for Resale, 09/11/2025 00:22:36 MDT

No reproduction or networking permitted without license from Accuris

Uncontrolled copy when printed (TASRC2) - Single Maroon Headers, 2026-02-04)

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

AIRBUS | NormMaster

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



LUBRICATION:

13

APPROVED DRY FILM LUBRICANT ON NUTS (CODES A, F, G, R, AND S)

CODE:

NAS1473 R 08 E B K

STIFFENING FLANGE:

- NO CODE = STIFFENING FLANGE AT MANUFACTURER'S OPTION
- K = STIFFENING FLANGE REQUIRED
- N = STIFFENING FLANGE PROHIBITED

PASSIVATION OPTION (CRES COMPONENTS): /16/

- NO CODE = PASSIVATE PER MIL-DTL-5002
- ~~B = PASSIVATE PER AMS2700 METHOD 2 /15/~~
- M = PASSIVATE PER AMS2700 METHOD 1, TYPE 8, CLASS 1, NO POST TREATMENT
- W = PASSIVATE PER AMS2700, METHOD 1, TYPE 6, TYPE 7, OR TYPE 8, NO POST TREATMENT OR METHOD 2 NO POST TREATMENT

FINISH:

- NO CODE = CAD PLATE NUT, SHELL, AND WASHER (MATERIAL CODES A, S, X, AND Y)
- SILVER PLATE NUT (MATERIAL CODE C)
- PASSIVATION FOR CRES NUT, SHELL, AND WASHER (MATERIAL CODES F, G, AND R)
- D = ALUMINUM COAT SHELL (MATERIAL CODES C, F, G, AND R)
- E = ZINC-NICKEL PLATE CRES SHELL OR STEEL NUT, SHELL, AND WASHER

SIZE FROM TABLE I

MATERIAL:

- A = STEEL NUT AND STEEL SHELL WITH ALUMINUM ALLOY OR STEEL WASHER, FUEL RESISTANT MIL-PRF-6855 SEAL (225 °F), DRY FILM LUBRICATED
- C = CRES NUT (SILVER PLATED), CRES SHELL AND CRES WASHER, NON-FUEL RESISTANT AMS3304 SEAL (450 °F)
- F = CRES NUT, CRES SHELL AND CRES WASHER, FUEL RESISTANT MIL-DTL-25988 SEAL, (350 °F), DRY FILM LUBRICATED
- G = CRES NUT, CRES SHELL AND CRES WASHER, NON-FUEL RESISTANT AMS3304 SEAL, (450 °F), DRY FILM LUBRICATED. SERVICE TEMPERATURE LIMITED BY DRY FILM LUBRICANT TO 400 °F
- R = CRES NUT, CRES SHELL AND CRES WASHER, FUEL RESISTANT MIL-PRF-6855 SEAL, (225 °F), DRY FILM LUBRICATED
- S = STEEL NUT, STEEL SHELL AND WASHER, FUEL RESISTANT MIL-DTL-25988 SEAL (350 °F), DRY FILM LUBRICATED
- X = SAME AS "A" WITHOUT DRY FILM LUBRICANT
- Y = SAME AS "S" WITHOUT DRY FILM LUBRICANT

BASIC PART NUMBER

REVISION

13

NAS1473

SHEET 3

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THERETO OF PATENT OR TRADEMARK RIGHTS.

Copyright Aerospace Industries Association of America, Inc. 2025. All rights reserved. Uncontrolled copy when printed (TASRC2 - Enrique Maroto-Herberos, 2026-02-04)

No reproduction or networking permitted without license from Accuris

Not for Resale, 09/11/2025 00:22:36 MDT

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

AIRBUS | NormMaster

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



EXAMPLES OF PART NUMBER:

- NAS1473A4 = .2500-28 UNJF-3B THREAD, STEEL NUT AND SHELL, CADMIUM PLATE, ALUMINUM ALLOY OR STEEL WASHER, DRY FILM LUBE NUT, STIFFENING FLANGE AT MANUFACTURER'S OPTION, MIL-PRF-6855 SEAL (225° F)
- NAS1473C5 = .3125-24 UNJF-3B THREAD, CRES NUT, SILVER PLATE NUT, NO LUBE, STIFFENING FLANGE AT MANUFACTURER'S OPTION, AMS3304 SEAL (450° F)
- 13 NAS1473F3DMK = .1900-32 UNJF-3B THREAD, CRES NUT, AMS2700 PASSIVATION METHOD 1, ALUMINUM PIGMENTED COAT SHELL, DRY FILM LUBE NUT, STIFFENING FLANGE REQUIRED, MIL-DTL-25988 SEAL (350° F)
- 13 NAS1473R08WN = .1640-32 UNJC-3B THREAD, CRES NUT, AMS2700 PASSIVATION METHOD 1, TYPE 6, TYPE 7, OR TYPE 8, NO POST TREATMENT, OR METHOD 2 NO POST TREATMENT, DRY FILM LUBE NUT, STIFFENING FLANGE PROHIBITED, MIL-PRF-6855 SEAL (225° F) /16/
- NAS1473S3EK = .1900-32 UNJF-3B THREAD, STEEL NUT, ZINC-NICKEL PLATE NUT, SHELL, AND WASHER, AND DRY FILM LUBE NUT, STIFFENING FLANGE REQUIRED, MIL-DTL-25988 SEAL (350° F)

NOTES:

- (1) THREAD ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH A BOLT IN THE MAXIMUM MISALIGNED POSITION.
- (2) NUT AND SHELL SHAPE OPTIONAL, WITHIN SPECIFIED MAXIMUM DIMENSIONS.
- (3) FOR CRES NUTS, MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 (AIR = 1.0) FOR A FIELD STRENGTH H = 200 OERSTEDS USING A MAGNETIC PERMEABILITY INDICATOR PER ASTM A342/A342M, TEST METHOD 3.
- /4/ "B" MAY BE .015 LARGER THAN MAX VALUES SHOWN IN TABLE FOR ITEMS WITH STIFFENING FLANGE.
- (5) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (6) PRESSURE RANGE: 0 TO 50 PSIG.
- (7) TEMPERATURE RANGE:
 - MATERIAL CODES A, R, AND X (-65 °F TO 225 °F)
 - MATERIAL CODES F, S, AND Y (-65 °F TO 350 °F)
 - MATERIAL CODE C WITH FINISH CODE D AND MATERIAL CODE G (-65 °F TO 400 °F)
 - MATERIAL CODE C WITH FINISH CODE E AND NO CODE (-65 °F TO 450 °F)
- 13 (8) THREADS IN ACCORDANCE WITH AS8879 BEFORE LUBRICATION.
- (9) MARKING: THE SMALLEST CONTAINER USED TO PACKAGE "A", "X" AND "R" CODED PARTS SHALL BE MARKED WITH THE CURE DATE (QUARTER AND YEAR) OF THE OLDEST RUBBER SEAL CONTAINED THEREIN. THE AGE OF RUBBER SEALS SHALL NOT EXCEED 20 QUARTERS AT THE TIME OF DELIVERY TO THE CONTRACTOR.
- (10) FLOAT: MINIMUM RADIAL FLOAT .020. MAXIMUM AXIAL FLOAT .030.
- (11) DIMENSIONS IN INCHES AND APPLY AFTER FINISH AND PRIOR TO THE APPLICATION OF LUBRICATION UNLESS OTHERWISE SPECIFIED.

REVISION
13
NAS1473
SHEET 4

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THEREOF OF PATENT OR TRADEMARK RIGHTS.

Copyright Aerospace Industries Association of America, Inc. 2025-02-04. All rights reserved. Not for Resale, 09/11/2025 00:22:36 MDT

No reproduction or networking permitted without license from Accuris

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

AIRBUS | NormMaster

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

AIRBUS | NormMaster
THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

- (12)
- THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (13)
- UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (14)
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- (13)
- /15/ PASSIVATION OPTION B INACTIVE FOR NEW DESIGN AFTER APRIL 30, 2025. SUPERSEDED BY PASSIVATION OPTION W
- (13)
- /16/ PASSIVATION AT MANUFACTURER'S OPTION FOR PLATED CRES COMPONENTS.

PROCUREMENT SPECIFICATION:

NASM25027 EXCEPT AS NOTED.
ALL NUTS SHALL MEET QUALIFICATION AND INSPECTION REQUIREMENTS. MANUFACTURERS SHALL PROVIDE EVIDENCE OF QUALIFICATION WHEN REQUIRED. TESTING SHALL BE PERFORMED BY MANUFACTURER OR INDEPENDENT LABORATORY. PROCURING AGENCY MAY CONDUCT CONFIRMING QUALIFICATION TESTS. NO QPL SHALL BE ESTABLISHED.

PERFORMANCE: QUALIFICATION TEST

- (13)
- 1.0 ALL REQUIREMENTS OF NASM25027 PERTAINING TO STEEL FLOATING PLATE NUTS, INCLUDING AXIAL STRENGTH REQUIREMENTS OF TABLE I FOR REGULAR STEEL NUTS, SHALL APPLY TO THIS PART EXCEPT THE MAXIMUM TEMPERATURE SHALL BE 225 °F, 350 °F, 400 °F AND 450 °F, AS APPLICABLE. A POSITIVE SEAL SHALL BE REQUIRED AFTER TESTING PER PARAGRAPH 3.9 (PUSH OUT) AND 3.8.3 (TORQUE OUT) OF NASM25027. THE PUSH OUT AND TORQUE OUT TESTS SHALL BE CARRIED TO A PROOF LOAD EQUAL TO THE REQUIREMENTS FOR THE APPLICABLE SIZE. ALL TESTS SHALL BE PERFORMED ON A SINGLE SHEET OF 2024-T3 OR 7075-T6 ALUMINUM ALLOY, NOMINAL THICKNESS OF .312 INCHES, AND HAVING A MINIMUM OF TEN (10) INCHES SQUARE (100 SQUARE INCHES) UNSUPPORTED AREA.

SIX (6) NUTS SHALL BE EQUALLY SPACED ON A CIRCLE HAVING A DIAMETER OF SEVEN AND ONE HALF (7.5) INCHES. THE NUTS SHALL BE ATTACHED TO THE PLATE BY SOCKET HEAD CAP SCREWS THREADED INTO BLIND HOLES TAPPED TO A DEPTH OF APPROXIMATELY .218 INCHES. #3-48 SCREWS SHALL BE USED FOR PARTS WITH Ø.098 INCH RIVET HOLES AND #5-40 SOCKET HEAD CAP SCREWS SHALL BE USED FOR PARTS WITH Ø.130 INCH RIVET HOLES. THE #3-48 SCREWS SHALL BE SEATED TO FOURTEEN (14) INCH-POUNDS AND THE #5-40 SCREWS TO EIGHTEEN (18) INCH-POUNDS. INSTALL BOLTS IN NUTS USING A SEATING TORQUE THREE (3) TIMES THE MAXIMUM LOCKING TORQUE OF NASM25027. THREE (3) NUTS SHALL BE TESTED WITH BOLTS INSTALLED AND THREE (3) WITH BOLTS REMOVED.
- 2.0 A POSITIVE SEAL SHALL BE CONSIDERED TO MEAN NO LEAKAGE BY VISUAL EXAMINATION, USING DYED LIQUID, WHEN SUBJECTED TO A STATIC DIFFERENTIAL PRESSURE OF 50 PSI +2/-0 PSI FOR A PERIOD OF FIVE (5) MINUTES MINIMUM. THE LIQUIDS USED SHALL BE FUELS CONFORMING TO MIL-DTL-5624 OR ASTM D471, TYPE III FOR 225 °F AND 350 °F SEALS, AND METHYL ALCOHOL FOR 450 °F SEALS. IN ADDITION, A CYCLING TEST SHALL BE PERFORMED CONSISTING OF A CYCLING PRESSURE OF BETWEEN 0 AND 50 PSI FOR 1000 CYCLES, A CYCLE BEING COMPLETED APPROXIMATELY EVERY TWELVE (12) SECONDS.
- (13)
- 2.1 A POSITIVE SEAL SHALL BE PROVIDED AFTER AGING AN EMPTY TEST FIXTURE WITH NUTS MOUNTED IN A HOT AIR FURNACE AT 450 °F ± 10 °F, 400 °F ± 10 °F, 350 °F ± 10 °F, 225 °F ± 10 °F, AS APPLICABLE FOR A PERIOD OF 4 HOURS ± 10 MINUTES. A CYCLING TEST SHALL BE PERFORMED AT TEMPERATURE WITHOUT LIQUID USING AIR PRESSURE ALONE. THE TEST PRESSURES AND PROCEDURES OF PARAGRAPH 2.0 SHALL APPLY EXCEPT THE NUMBER OF PRESSURE CYCLES SHALL BE LIMITED TO 100. DURING THIS PERIOD, SINCE THERE IS NO LIQUID IN THE TANK, THERE IS NO CHECK FOR LEAKAGE.

REVISION
13
NAS1473
SHEET 5

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THEREOF OF PATENT OR TRADEMARK RIGHTS

2. Control of Changes: Controlled Account: 157036000

No reproduction or networking permitted without license from Accuris

Not for Resale, 09/11/2025 00:22:36 MDT

Uncontrolled copy when printed (TASRC2 - Enrique Maroto-Jerezos, 2026-02-04)



NATIONAL AEROSPACE STANDARD

© COPYRIGHT 2025 AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. ALL RIGHTS RESERVED



- 2.2
- IMMEDIATELY AFTER ELEVATED TEMPERATURE TEST CYCLES, THE FIXTURE SHALL BE REMOVED FROM THE FURNACE AND ALLOWED TO COOL TO ROOM TEMPERATURE. AT ROOM TEMPERATURE, LIQUID SHALL BE ADDED AND POSITIVE SEAL SHALL BE PROVIDED IN LIQUIDS WHEN TESTED IN ACCORDANCE WITH TEST PRESSURES AND PROCEDURES OUTLINED IN PARAGRAPH 2.0.
- 2.3
- IN ADDITION, THE SAMPLES TESTED IN 2.1 SHALL PROVIDE A POSITIVE SEAL AFTER A CYCLING TEST HAS BEEN PERFORMED AS FOLLOWS: PLACE TEST FIXTURE IN A COLD BOX AT -65 °F ± 10 °F AND ALLOW TO SOAK FOR A PERIOD OF 4 HOURS ± 10 MINUTES. AFTER SOAKING AT THIS TEMPERATURE, APPLY A STATIC PRESSURE OF 50 PSI ± 5 PSI FOR A PERIOD OF ONE (1) HOUR. A CYCLING TEST SHALL THEN BE PERFORMED BY HOLDING A PRESSURE OF 50 PSI ± 5 PSI ON THE TEST FLUID FOR A PERIOD TO TWENTY (20) SECONDS AND RELEASING PRESSURE FOR TEN (10) SECONDS. REPEAT THIS THIRTY (30) SECOND CYCLE FOR 120 CYCLES. ALL TESTING UNDER THIS PARAGRAPH SHALL BE PERFORMED AT -65 °F ± 10 °F.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC
1000 WILSON BLVD.
ARLINGTON, VA 22209

AIRBUS | NormMaster

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

FORM 21-01

REVISION
13
NAS1473
SHEET 6

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THEREOF OF PATENT OR TRADEMARK RIGHTS.

Copyright Aerospace Industries Association of America, Inc. 2025. All rights reserved. Licensed Airbus Extract Account 157036006

Uncontrolled copy when printed (TASRC2 - Enrique Maroto-Herreros, 2026-02-04)